


PARTS DRAWING

ROHS Compliant

REV	PRODUCT NO.	DATE	NAME	DESCRIPTION
A0	FS-LJX-831	2025.08.25		Initial issuance




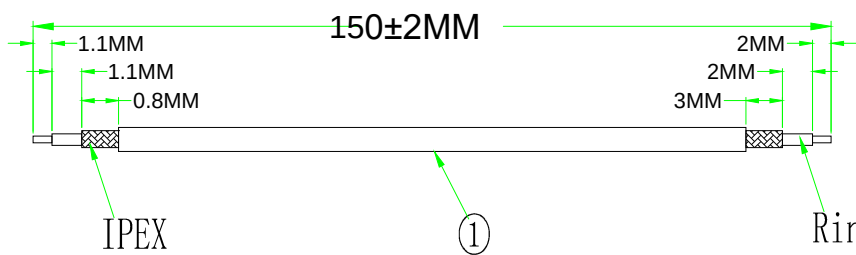

IPEX


①

Ring stripping tin plating

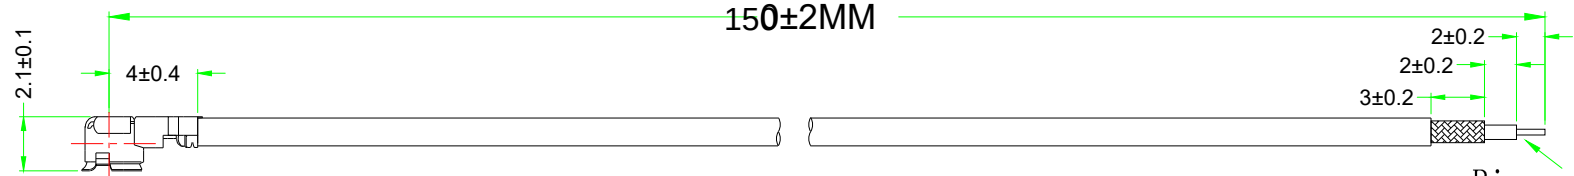

②

Ring stripping tin plating



Ask

- There is no broken skin or damage to the wire sheath.
- The finished product must be 100% tested for continuity OK.
- 100% inspection of finished products is required.
- Adopt environmental protection process. The finished product meets ROHS requirements.

Test conditions

rated voltage: AC 60V

Contact impedance: 20-0hm

voltage withstand: AC200V

Insulation impedance:500m-0hm


characteristic impedance: 50 0hm

Fre	Return loss value
1GHz	-0.2180 dB
2GHz	-0.3337 dB
3GHz	-0.1473 dB
4GHz	-0.1414 dB
5GHz	-0.4916 dB
6GHz	-0.7227 dB

Fre	V. S. W. R
1GHz	1.0077
2GHz	1.1000
3GHz	1.2426
4GHz	1.2856
5GHz	1.1558
6GHz	1.4957

(Frequency Range)	0-6GHz
(Gain)	
(VSWR)	≤1.6
(Polarization)	vertical
(Impedance)	50 Ω

ANGLE PROJECTION



GENERAL TOLERANCE

100~200 : ± 3.00

50~100 : ± 2.00

25~50 : ± 0.20

10~25 : ± 0.15

1~10 : ± 0.1

PRODUCT NAME
RF COAXIAL CABLE ASSY
P/NO:AT-CA-UFL-UFL-150-RG-178
ANAND TECHNOLOGIES
SHEET 1/1

NO	Code	Name	Description	Q'ty
2	1.012.0101	IPEX	1.13 First generation terminals	1
1	1.003.0102	Wire	1.13 wire double tin black L=70MM	1

operation temperature: -45℃~85℃

storage temperature: -45℃~85℃