
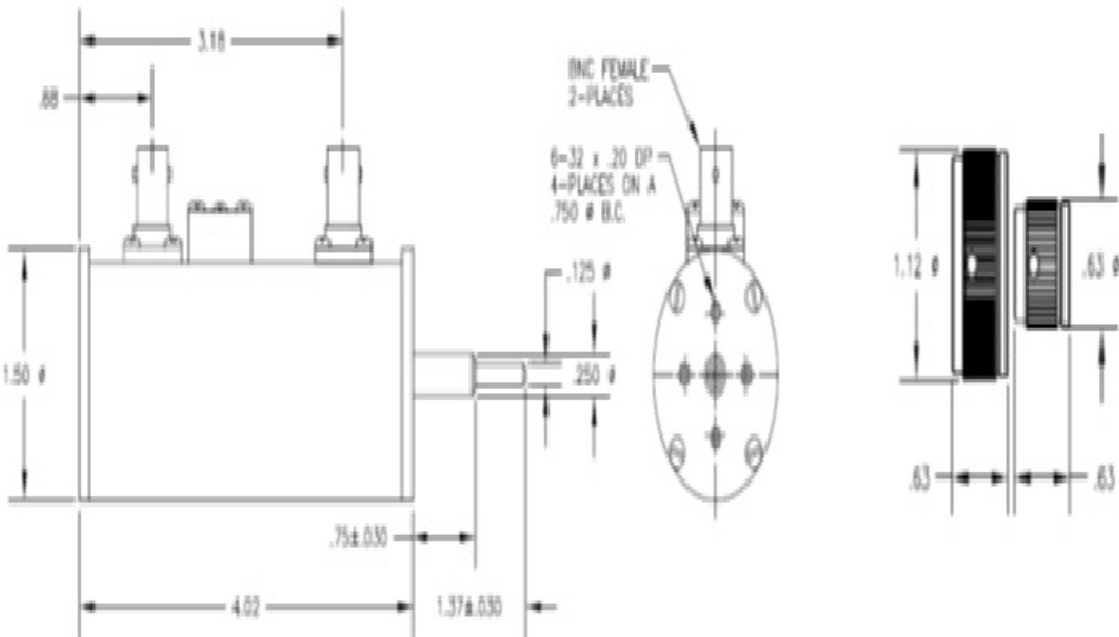


Electrical Specification

Part No	:	AT-VA-DR-3000-110
Frequency Range	:	DC-3000 MHz
Impedance	:	50 Ω
Attenuation range	:	0-110 dB
Attenuation Step	:	1 dB
VSWR	:	1.2:1 max DC-1000MHz
	:	1.4:1 max 1000-2000MHz
	:	1.5:1 max 2000-3000MHz
Insertion Loss	:	0.5dB max DC-1000MHz
	:	1.0dB max 1000-2000MHz
	:	1.0dB max 2000-3000MHz
Attenuation Accuracy	:	±0.5dB or 2% DC-1000MHz
	:	±0.5dB or 3% 1000-2000MHz
	:	±0.5dB or 4% 2000-3000MHz
RF I/P Power	:	2 watts average
	:	1000 watts peak
Direction of Rotation	:	Attenuation increases
	:	in clockwise direction
Indexing	:	30 degree with stops
	:	at minimum and maximum
RF Connector	:	BNC, SMA, TNC AND N Female
Operating Temperature	:	-20 to +85 (°C)



DESIGNED BY: Kiran Kumar		AT - VA - DR - 3000 - 110	I	-
DATE: 15/12/2016			H	-
CHECKED BY: Mr. S. Metri			G	-
DATE: 16/12/2016			F	-
SIZE A3		ANAND TECHNOLOGIES	E	-
SCALE 1 : 1	WEIGHT (kg) XXX		D	-
DRAWING NUMBER AT - VA - DR - 3000 - 110		SHEET 1 / 1	C	-
This drawing is our property; it can't be reproduced or communicated without our written agreement.			B	-
			A	-