

H

G

F

E

D

C

B

A

4

4

3

3

2

2


1


1



Electricl Specification

Part No	:	AT-VA-DR-3000-30
Frequency Range	:	DC-3000 MHz
Impedance	:	50 Ω
Attenuation range	:	0-30 dB
Attenuation Step	:	1 dB
VSWR	:	1.4:1 max DC- 1000 MHz
	:	1.5:1 max 1000- 2000 MHz
	:	1.7:1 max 2000-3000MHz
Insertion Loss	:	1.1 dB max
Attenuation Accuracy	:	± 0.2 dB or 1% DC-500MHz
	:	± 0.3 dB or 2% 500-1000MHz
	:	± 0.5 dB or 4% 2000-3000MHz
RF I/P Power	:	2 watts average
	:	1000 watts peak
Direction of Rotation	:	Attenuation increases
	:	in clockwise direction
Indexing	:	30 degree with stops
	:	at minimum and maximum
RF Connector	:	SMA, TNC AND N Female
Operating Temperature	:	-20 to +85 ($^{\circ}$ C)

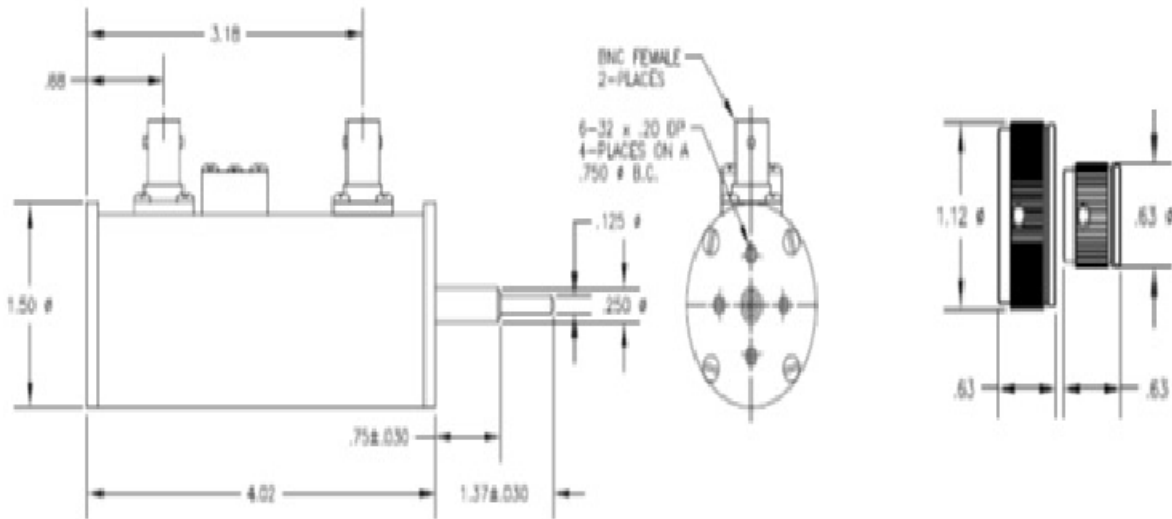

DESIGNED BY: Kiran Kumar		AT - VA - DR - 1000 - 110		I	-
DATE: 15/12/2016				H	-
CHECKED BY: Mr. S. Metri				G	-
DATE: 16/12/2016				F	-
SIZE A3		ANAND TECHNOLOGIES		E	-
SCALE 1 : 1	WEIGHT (kg) XXX			D	-
		DRAWING NUMBER AT - VA - DR - 1000 - 110	SHEET 1 / 1	C	-
This drawing is our property; it can't be reproduced or communicated without our written agreement.				B	-
				A	-

H

G

B

A