

4

3

2

1

4

3

2

1

H

G

F

E

D

C

B


A

H

G


B

A

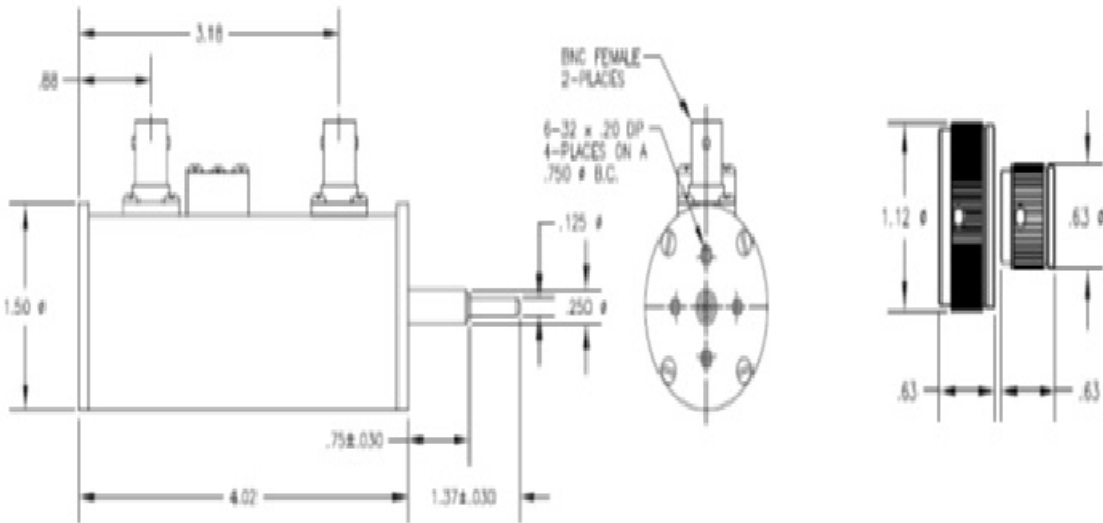

Electricl Specification

Part No	:	AT-VA-DR-3000-60
Frequency Range	:	DC-3000 MHz
Impedance	:	50 Ω
Attenuation range	:	0-60 dB
Attenuation Step	:	1 dB
VSWR	:	1.35:1 max DC- 1000 MHz
	:	1.5:1 max 1000- 3\000 MHz
Insertion Loss	:	0.6 dB max DC-1000 MHz
	:	1.2dB max 1000-3000MHz
Attenuation Accuracy	:	$\pm$ 0.5dB or 5%
RF I/P Power	:	2 watts average
	:	1000 watts peak
Direction of Rotation	:	Attenuation increases
	:	in clockwise direction
Indexing	:	30 degree with stops
	:	at minimum and maximum
RF Connector	:	SMA, or N Female
Operating Temperature	:	-20 to +85 ($^{\circ}$ C)

DESIGNED BY: Kiran Kumar		AT - VA - DR - 3000 - 60		I	-
DATE: 15/12/2016				H	-
CHECKED BY: Mr. S. Metri				G	-
DATE: 16/12/2016				F	-
SIZE A3		ANAND TECHNOLOGIES		E	-
SCALE 1 : 1	WEIGHT (kg) XXX	DRAWING NUMBER AT - VA - DR - 3000 - 60	SHEET 1 / 1	D	-
				C	-
				B	-
				A	-

This drawing is our property; it can't be reproduced or communicated without our written agreement.

This drawing is our property; it can't be reproduced or communicated without our written agreement.