



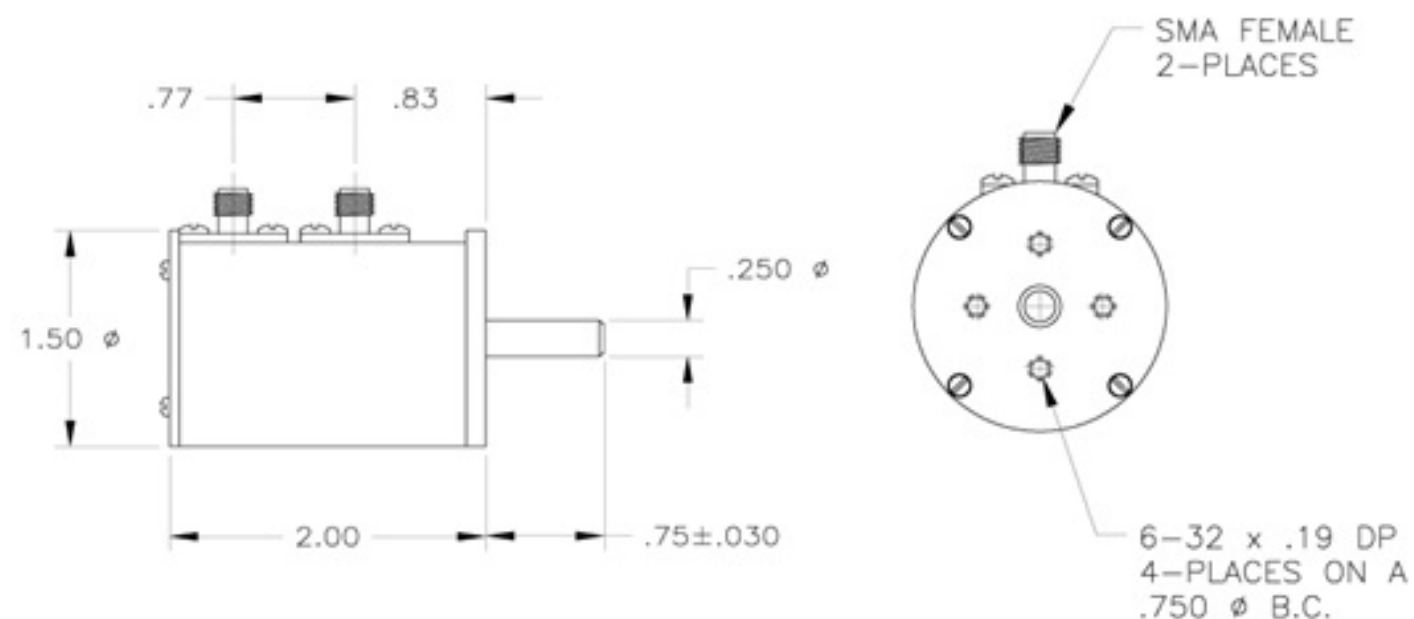

Specification

Part No	:	AT-PA-6000
Frequency Range	:	DC-3000 MHz
Impedance	:	50 Ω
Attenuation Range	:	0-1 dB
Attenuation Step	:	0.1 dB
VSWR	:	1.2:1 max DC-1000MHz
	:	1.4:1 max 1000-2000MHz
	:	1.5:1 max 2000-3000MHz
Insertion loss	:	1 dB max
Attenuation Accuracy	:	± 0.5 dB
RF Input Power	:	2 watts average
	:	25 dBm (no damage)
Direction of Rotation	:	Attenuation increases in clockwise direction
Indexing	:	30 degree with stops at minimum and maximum
RF Connector	:	BNC, SMA, TNC AND N
Operating Temperature	:	-20 to +85 ($^{\circ}\text{C}$)



DESIGNED BY: Kiran Kumar		AT - PA - 6000		I	—
DATE: 15/12/2016				H	—
CHECKED BY: SM				G	—
DATE: 16/12/2016				F	—
SIZE A3		ANAND TECHNOLOGIES		E	—
SCALE 1 : 1	WEIGHT (kg)			D	—
DRAWING NUMBER AT - PA - 6000				C	—
		SHEET 1 / 1		B	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.				A	—