

4

3

2

1

4

3

2

1

H

G

F

E

D

C

B

A

H

G


B

A



Specification

Part No	:	AT-VA-SR-8000-10
Frequency Range	:	DC-8000 MHz
Impedance	:	50 Ω
Attenuation Range	:	0-10 dB
Attenuation Step	:	1 dB
VSWR	:	1.3:1 max DC-4000MHz 1.6:1 max 4000-8000MHz
Insertion loss	:	0.6dB maximum
Attenuation Accuracy	:	± 0.3 dB DC-4000MHz ± 0.5 dB 4000-8000MHz
RF Input Power	:	2 watts average 200 watts peak
Direction of Rotation	:	Attenuation increases in clockwise direction
Indexing	:	36 degree with stops at minimum and maximum settings
RF Connector	:	SMA Female
Operating Temperature	:	-20 to +85(°C)

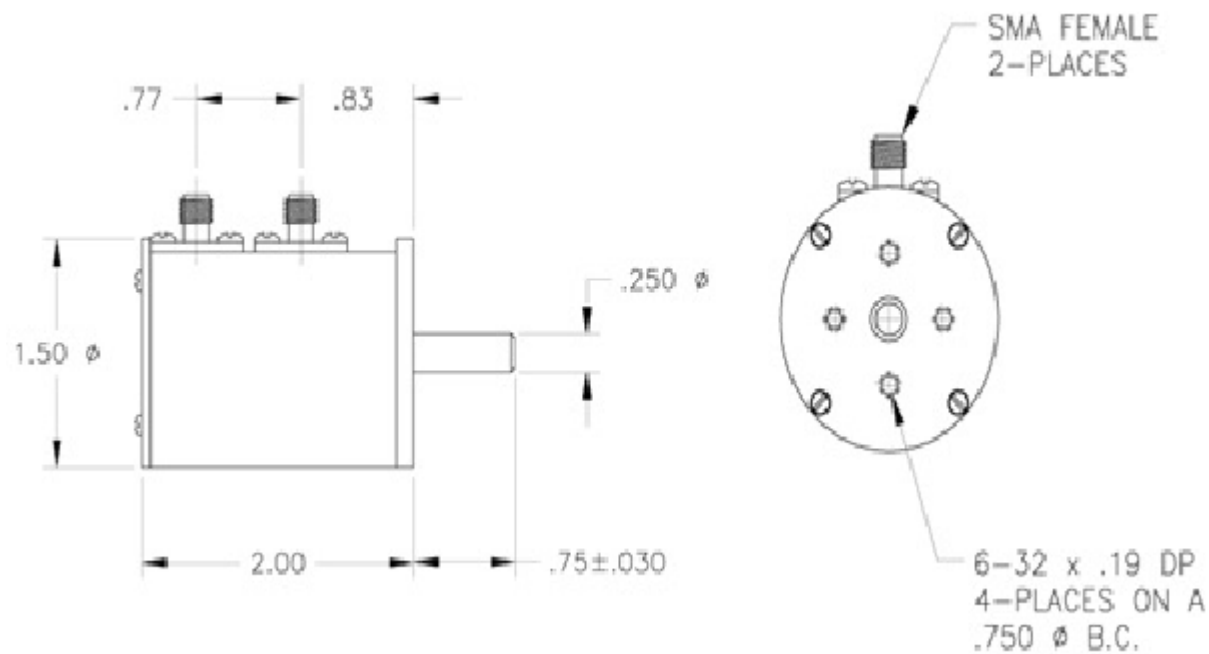

DESIGNED BY: Kiran Kumar	AT-VA-SR-8000-10		I	-
DATE: 15/12/2016			H	-
CHECKED BY: SM			G	-
DATE: 16/12/2016			F	-
SIZE A3		ANAND TECHNOLOGIES	E	-
SCALE 1:1			D	-
WEIGHT (kg)	DRAWING NUMBER AT-VA-SR-8000-10	SHEET 1/1	C	-
			B	-
			A	-

This drawing is our property; it can't be reproduced or communicated without our written agreement.