




Electrical Specification

Part No	:	AT-Attenuator
Frequeny range	:	DC to 3 GHz
Attenuation	:	3,6,10,20,30,40 dB
Attenuation Accuracy	:	0.6 dB from DC to 3 GHz
Nominal Impedance	:	50 Ω
Avg Power	:	80 W
Operating Temperature	:	-55 to +125
RF Connector	:	N

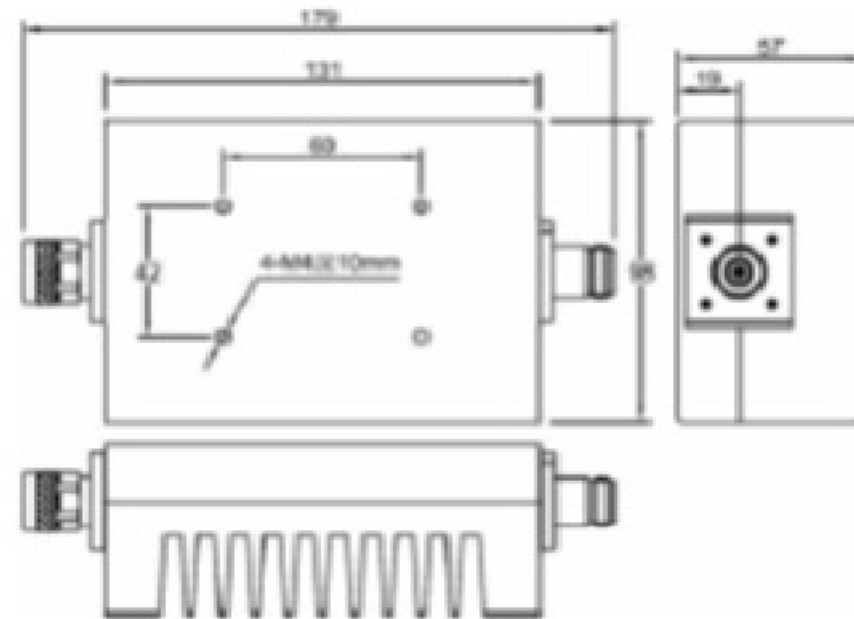


FREQ RANGE -GHz	Typical VSWR(:1)	Max VSWR(:1)
DC to 1	1.10	
1 to 2	1.20	
2 to 3	1.25	
Dc to 3		1.30

Material And plating

PARTS	MATERIAL	PLATING (micro-inch)
Body & Nut	Aluminium	Black Anodize
Contact (M/F)	QSn6.5-0.1	Gold 30
Insulator	Teflon	

Features

- 1) High Power
- 2) High Attenuation Accuracy
- 3) Small VSWR

DESIGNED BY: Kiran Kumar		FIXED ATTENUATOR		I	—
DATE: 15/12/2016				H	—
CHECKED BY: Mr. S. Metri				G	—
DATE: 16/12/2016				F	—
SIZE A3				E	—
				D	—
SCALE 1:1	WEIGHT (kg) XXX	DRAWING NUMBER FIXED ATTENUATOR		C	—
		SHEET 1 / 1		B	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.				A	—