



Electrical Specification

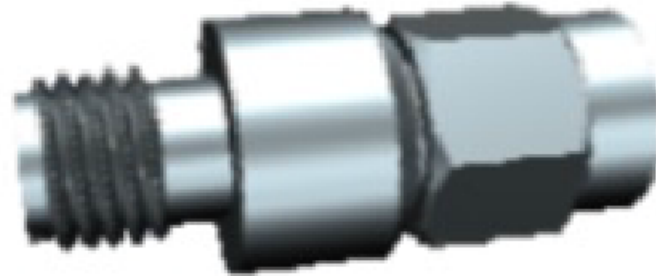

Part No	:	AT-Attenuator
Frequency range	:	DC to 18 GHz
Attenuation	:	1,2,3,4,5,6,10,20,30 dB
Attenuation Accuracy	:	1,3,6,10,20 dB : ± 0.5 dB
	:	2,4,5dB : ± 0.6 dB
	:	30 dB : ± 0.75 dB
Nominal Impedance	:	50 Ω
Avg Power	:	2 W
Operating Temperature	:	-55 to +150
RF Connector	:	SMA

FREQ RANGE -GHz	Typical VSWR(:1)	Max VSWR(:1)
DC to 6	1.15	
6 to 12	1.20	
12 to 18	1.30	
Dc to 18		1.50

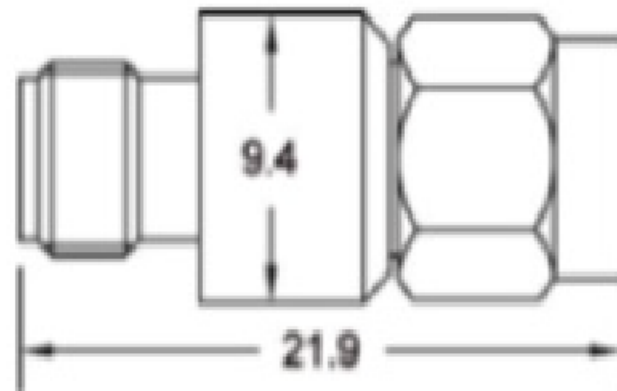


Features

- 1) High Attenuation Accuracy
- 2) Small VSWR
- 3) Stainless Steel
- 4) Ceramic Chip
- 5) Low cost high performance

Material And plating

PARTS	MATERIAL	PLATING (micro-inch)
Body & Nut	Stainless Steel	Passivated
Contact (M/F)	Beryllium Copper	Gold 30
Insulator	Teflon	

DESIGNED BY: Kiran Kumar		FIXED ATTENUATOR		I	—
DATE: 15/12/2016				H	—
CHECKED BY: Mr. S. Metri				G	—
DATE: 16/12/2016				F	—
SIZE		ANAND TECHNOLOGIES		E	—
SCALE	WEIGHT (kg)	DRAWING NUMBER	SHEET	D	—
1:1	XXX	FIXED ATTENUATOR	1 / 1	C	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.				B	—
				A	—