


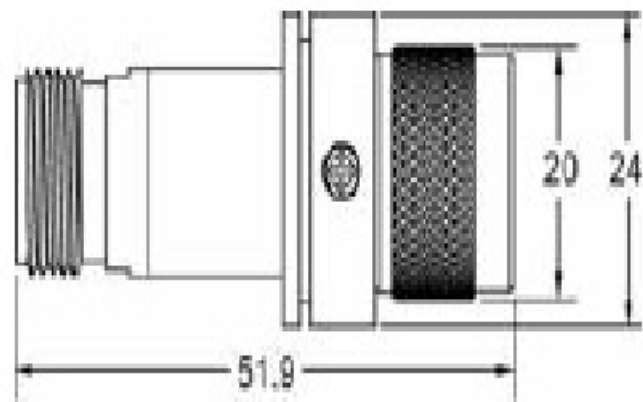

Material And plating

PARTS	MATERIAL	PLATING (micro-inch)
Body & Nut	Stainless Steel	Passivated
Contact (M/F)	Beryllium Copper	Gold 30
Insulator	Teflon	

Electricl Specification

Part No	:	AT-Attenuator
Frequeny range	:	DC to 3,6,18 GHz
Attenuation	:	3,6,10,20,30,40 dB
Attenuation Accuracy	:	1.0 dB over DC - 3 GHz
	:	1.0 dB over DC - 6 GHz
	:	1.0 dB over DC - 18 GHz
Nominal Impedance	:	50 Ω
Avg Power	:	5 W
Operating Temperature	:	-55 to +150
RF Connector	:	N

FREQ RANGE(GHz)	Typical VSWR(:1)	Maximum VSWR(:1)
DC to 1	1.10	
1 to 2	1.15	
2 to 3	1.20	
DC to 3		1.25
2 to 4	1.15	
4 to 6	1.20	
DC to 6		1.25
6 to 12	1.25	
12 to 18	1.35	
DC to 18		1.40

Features

- 1) High Attenuation Accuracy
- 2) Small VSWR
- 3) Nickel Plated Brass
- 4) Ceramic Chip
- 5) Low Cost High performance

DESIGNED BY: Kiran Kumar		FIXED ATTENUATOR		I	-
DATE: 15/12/2016				H	-
CHECKED BY: Mr. S. Metri		ANAND TECHNOLOGIES		G	-
DATE: 16/12/2016				F	-
SIZE A3		FIXED ATTENUATOR		E	-
SCALE 1:1	WEIGHT (kg) XXX			D	-
DRAWING NUMBER		SHEET		C	-
		1 / 1		B	-
				A	-

This drawing is our property; it can't be reproduced or communicated without our written agreement.