

4

4

3

3


2

2


1

1

Specifications

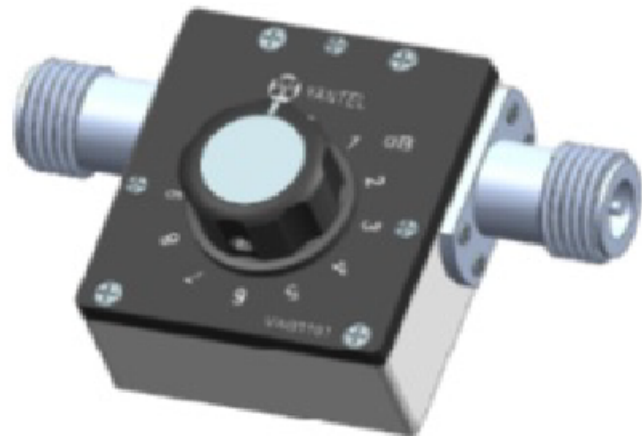

Part No	: Attenuator-VA-7
Frequency Range	: DC to 2.7 GHz
Attenuation	: 0 to 11dB
Step Value	: 1 dB
Insertion loss at 0dB	: 0.5dB at 2GHz 1.0dB at 2.7GHz
Attenuation Accuracy	: 0.2dB at 1GHz(typical) 0.5dB at 1GHz(max) 0.7dB at 2GHz(typical) 1.0dB at 2GHz(max) 1.0dB at 2.7GHz(typical) 1.5dB at 2.7GHz(max)
Nominal Impedance	: 50 Ω
Average Power	: 2 W
Operating Temperature	: -40 to +85(°C)

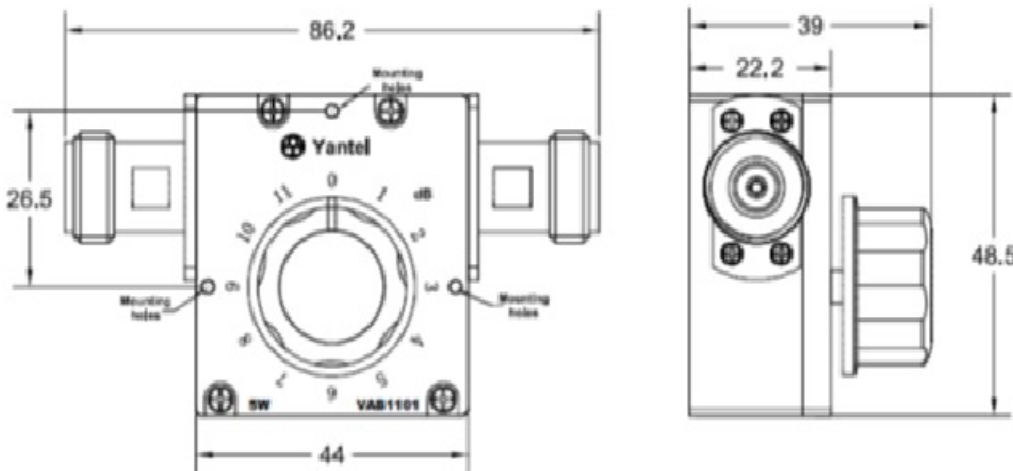

Features

- Ultra small size with innovative microstrip technology
- Available step value:0dB, 1dB, 2dB, 3dB, 4dB, 5dB, 6dB, 7dB, 8dB, 9dB, 10dB, 11dB.
- High accuracy
- High performance low cost
- Impedance: 50 or 75 ohm
- Operation repeatability:500 times each switch
- POM material in rotary switch,operating up to 85°C

Freq. Range (GHz)	VSWR(:1)	
	Typ.	Max.
DC to 2	1.10	1.35
2.0 to 2.5	1.25	1.50
2.5 to 2.7	1.35	1.60

DESIGNED BY: Kiran Kumar	Attenuator VA7		I	-
DATE: 15/12/2016			H	-
CHECKED BY: Mr. S. Metri			G	-
DATE: 16/12/2016	ANAND TECHNOLOGIES		F	-
SIZE A3			E	-
SCALE 1:1	WEIGHT (kg) XXX	DRAWING NUMBER Attenuator VA7	D	-
		SHEET 1 / 1	C	-
			B	-
			A	-

This drawing is our property; it can't be reproduced or communicated without our written agreement.