





Specifications

Part No	:	AT/DKVA-90
Frequency Range	:	DC to 3 GHz
Attenuation Step Size	:	0~100/110dB in 1dB step
Attenuation Step	:	1,2,3,4,5,6,7,8,9,10dB & 10-90
Attenuation Accuracy	:	±0.5dB(<50dB), ±5%dB(>50dB)
VSWR	:	≤1.5
Insertion Loss (dB)	:	≤1.0/1.45
Power Capacity (W)	:	10
Impedence(Ω)	:	50
Connector Type	:	SMA (F)
Operating Temperature℃	:	-25 ~ 85
Weight(Kg)	:	0.4

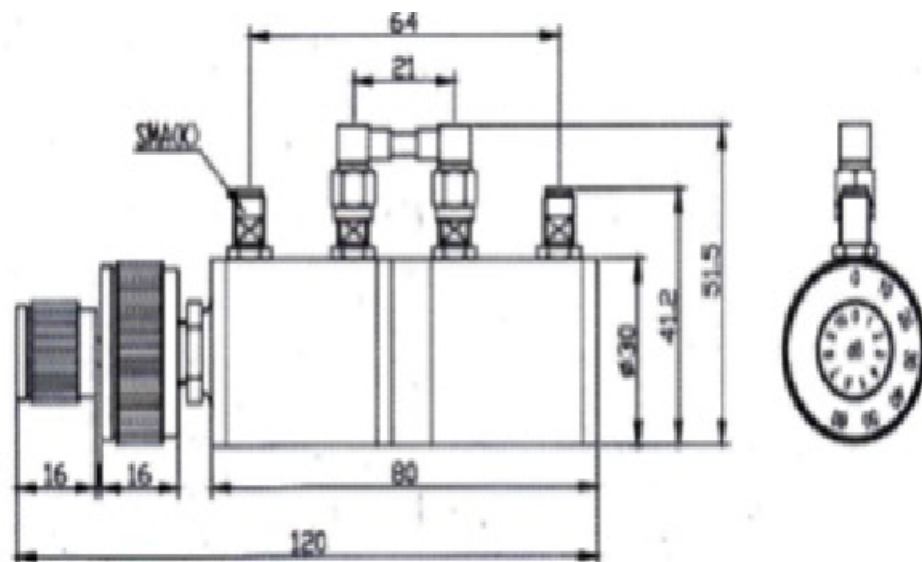

Freq. Range (GHz)	VSWR(:1)	
	Typ.	Max.
DC to 2	1.10	1.35
2.0 to 2.5	1.25	1.50
2.5 to 2.7	1.35	1.60

DESIGNED BY: Kiran Kumar DATE: 15/12/2016		Dual Knob Variable Attenuator		I	—
CHECKED BY: Mr. S. Metri DATE: 16/12/2016				H	—
SIZE		ANAND TECHNOLOGIES		G	—
A3				F	—
SCALE	WEIGHT (kg)	DRAWING NUMBER	SHEET	E	—
1:1	XXX	Attenuator DKVA-90	1 / 1	D	—
				C	—
				B	—
				A	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.					