

H

G

F

E

D

C

B


A


Electricl Specification

Part No	:	AT-ANT-GPS-SCMIP65-SMA316-3-33
Antenna Type	:	ACTIVE
Operating Frequency(±3MHz)	:	1575.425 MHz
LNA Gain Without Cable(±0.5dB):	:	33.5 dB
Patch Gain (±0.5dBi)	:	4.5 dBi
Impedance	:	50 Ohm
Noise Figure	:	1.2 dB
DC Operating Voltage	:	5 V
Polarization	:	RHCP
RF Connector	:	SMA
Connector Type	:	Male
Cable Type	:	RG316
Cable Length	:	3,5,7,10 mtrs

Mechanical Specification

Dimensions	:	58±1 x Ø47±1 mm
Mount Type	:	Screw Mount (DIN)
Protection	:	IP-65/67(DIN 40050-9)
Operating Temperature	:	-20 to +65(°C)
Enclosure	:	Abs
Environment	:	95% RH Humidity
Description	:	HIGH GAIN GPS ANTENNA IP-65/67

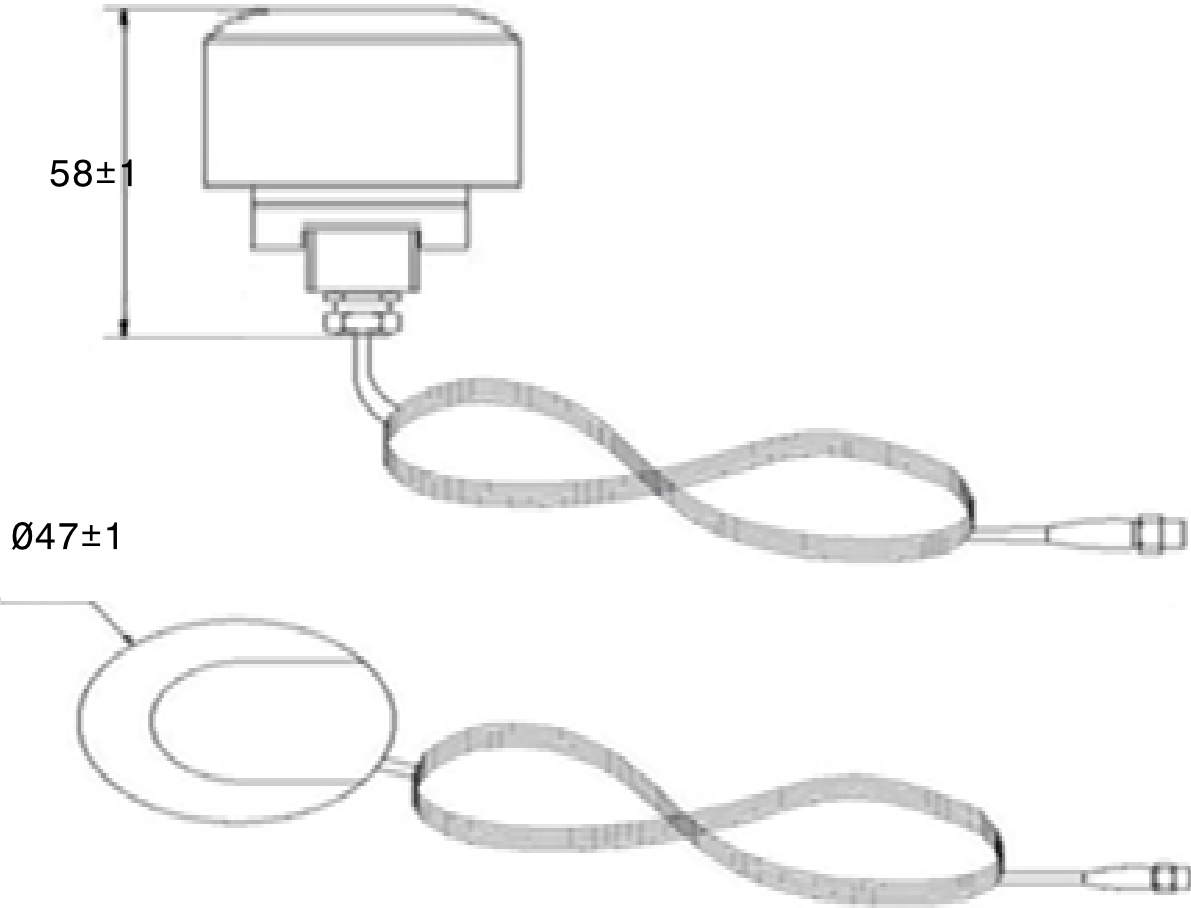

DESIGNED BY: Kiran Kumar		HIGH GAIN GPS ANTENNA IP-65/67		I	-
DATE: 03/10/2016				H	-
CHECKED BY: Mr. S. Metri				G	-
DATE: 03/10/2016				F	-
SIZE A3		ANAND TECHNOLOGIES		E	-
SCALE 1 : 1	WEIGHT (kg) XXX			D	-
DRAWING NUMBER AT-ANT-GPS-IP65/67-SMA33			SHEET 1 / 1	C	-
This drawing is our property; it can't be reproduced or communicated without our written agreement.				B	-
				A	-

This drawing is our property; it can't be reproduced or communicated without our written agreement.

H

G

B

A