


RG-316 CABLE SPECIFICATION :

- 4
- 1) Inner Conductor Material and Plating - Copper Clad Steel, Silver
- 2) Dielectric Type - PTFE
- 3) Shield Materials - Silver Plated Copper Braid
- 4) Jacket Material and Color - FEP, Tan
- 5) Impedance, Ohms - 50
- 6) Velocity of Propagation, % - 70
- 7) Maximum Operating Frequency, GHz - DC TO 3
- 8) Capacitance, pF/ft [pF/m] - 29.4 [96.46]
- 9) Maximum Operating Voltage, Volts - 1,200
- 10)Operating Range, deg C - -55 to +200
- 11)Material - Copper Clad Steel
- 12)Diameter, mm - 2.489
- 13)Minimum Bend Radius,mm - 12.7

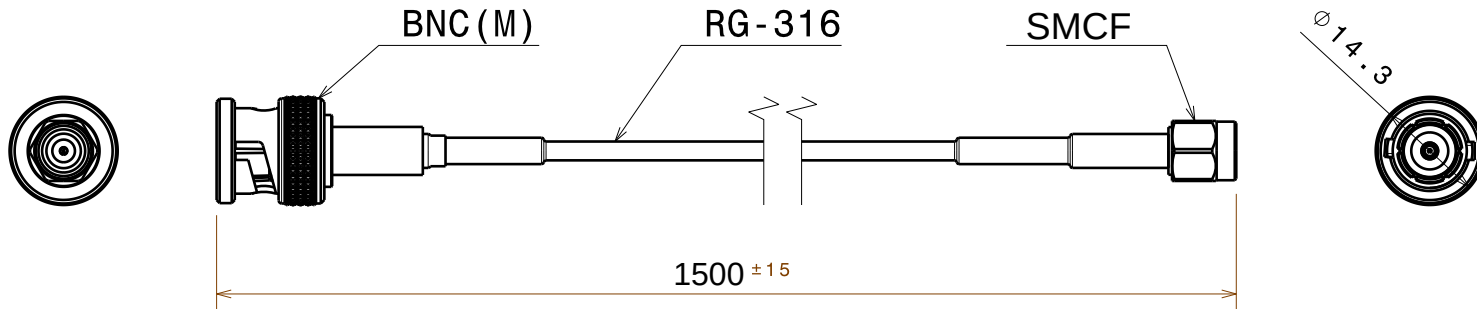


SMC FEMALE CONNECTOR SPECIFICATION :

- 3
- 1) INSULATORS - PTFE ASTM D 171,CRADE1 TYPE I, CLASS "B".
- 2) CRIMP NUT - BRASS PER ASTM B16, ALLOY C36000, TEMPER H02
- 3) CRIMP SLEEVE - SEAMLESS LOWLEAD BRASS TUBE, ALLOY 330, SOFT ANNEAL TEMPER
- 4) HEAT SHRINK SLEEVE - RNF100
- 5) CONTACT PIN - BRASS, GOLD PLATED
- 6) BODY - BRASS, NICKEL PLATING
- 7) ALL OTHER METAL PARTS - BRASS, NICKEL PLATING
- 8) Maximum Operating Frequency, GHz - DC TO 9.6

BNC CONNECTOR SPECIFICATION :

- 2
- 1) INSULATORS - PTFE
- 2) CRIMP NUT - BRASS PER ASTM B16, ALLOY C36000, TEMPER H02
- 3) CRIMP SLEEVE - SEAMLESS LOWLEAD BRASS TUBE, ALLOY 330, SOFT ANNEAL TEMPER
- 4) HEAT SHRINK SLEEVE - RNF100
- 5) CONTACT PIN - BRASS, GOLD PLATING
- 6) BODY - BRASS, NICKLE PLATING
- 7) ALL OTHER METAL PARTS - BRASS, NICKLE PLATING
- 8) Maximum Operating Frequency, GHz - DC TO 4

DESIGNED BY: GURU BIRADAR		BNC (M) SMC FEMALE CABLE ASSY.		I	-
DATE: 03/01/2018				H	-
CHECKED BY: Mr. S. METRI				G	-
DATE: 03/01/2018				F	-
SIZE A4		ANAND TECHNOLOGIES		E	-
SCALE 1 : 1	WEIGHT (kg) NA			D	-
		DRAWING NUMBER AT-CA-BNCM-SMCF-1500	SHEET 1 / 1	C	-
				B	-
This drawing is our property; it can't be reproduced or communicated without our written agreement.				A	-

H

G

B

A