

SPECIFICATION


1. IPEX MHF PLUG (SEE CHART FOR P/N)
2. Working Frequency : DC TO 6GHz
3. Insulation Resistance : 1000 MEGA OHM-KM Min
4. Conductor Resistance : 1400 OHM/KM/20°C Max.
5. Dielectric Strength : AC 1.0 KV/minute
6. Spark test : 2.5 KV
7. Nom. Impedance : 50 ± 3 Ohms
8. Nom. Capacitance : 97 ± 3 pF/m
9. Attenuation (dB/1M)
- 2.0 GHz : 3.6

2.4 GHz : 5.1


3.0 GHz : 6.2

4.0 GHz : 7.5

5.0 GHz : 8.5
- 10.STANDARD CABLE LENGTH : 110,180,200,220 mm

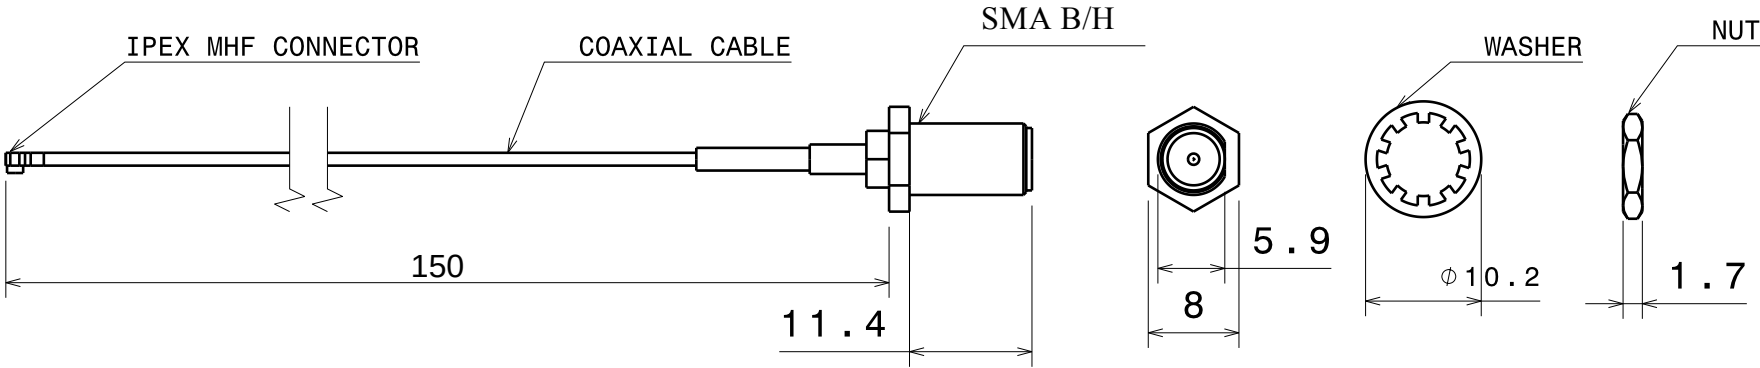


CABLE & COLOUR	PLUG P/N	SMA P/N	CABLE DIA PART NO.
ø0.81 GRAY&BLACK	20278-112R-08	AT-SMA-08	X1
ø1.13 GREY&BLACK	20278-112R-13	AT-SMA-13	X2
ø1.32 GREY&BLACK	20278-112R-32	AT-SMA-32	X3
ø1.37 GREY&BLACK	20351-112R-37	AT-SMA-37	X4

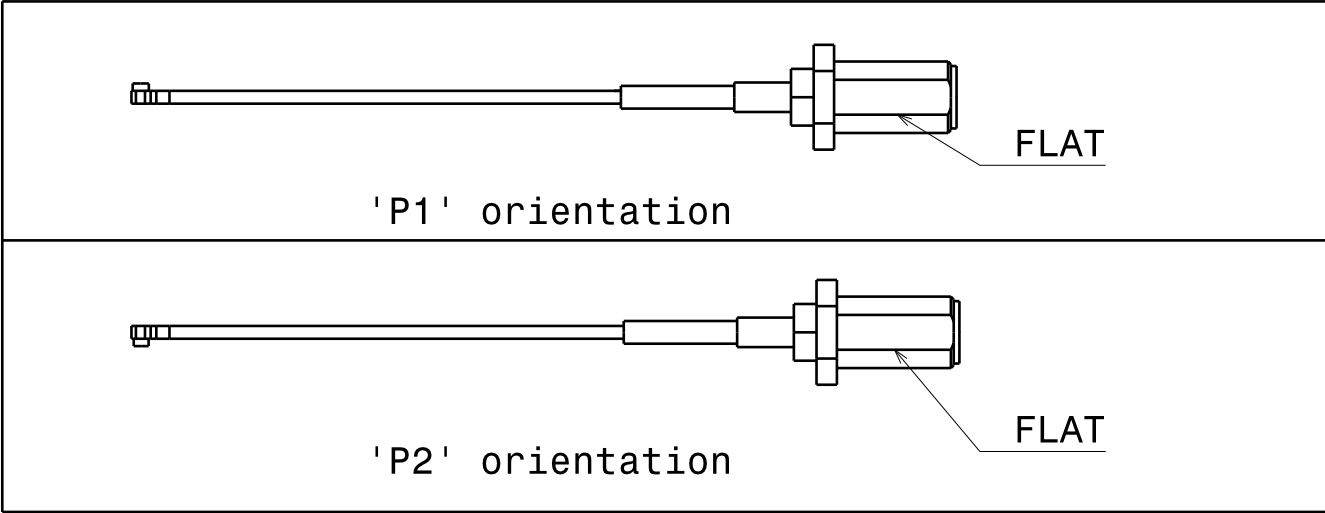

- NOTE :
1. FIXED ORIENTATION IS POSSIBLE FOR CABLE LENGTH 25MM TO 220MM. PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE (P1 & P2).
2. X1,X2,X3 AND X4 ARE THE DIAMETERS OF THE CABLES TO SELECT THE PART NUMBER.

- IMPORTANT PRECAUTIONS:
1. CABLE USING 'MICRO' COAX ARE DELICATE .
2. HANDLE WITH CARE
3. DO NOT TWIST, APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM THE CABLE.

*DO NOT SCALE THE DRAWINGS.

DESIGNED BY: GURU BIRADAR		IPEX MHF(HSC COMP) TO SMA B/H CABLE ASSY	I	—
DATE: 23/11/2016			H	—
CHECKED BY: Mr. S. METRI	DATE: 23/11/2016		G	—
			F	—
SIZE A3		ANAND TECHNOLOGIES	E	—
SCALE 1 : 1	WEIGHT (kg) NA		D	—
DRAWING NUMBER AT-CA-SMAF-UFL-1.13-150			C	—
SHEET 1 / 1			B	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.			A	—