



RG-142 CABLE SPECIFICATION :

- 1) Inner Conductor Material and Plating - Copper Clad Steel, Silver
- 2) Dielectric Type - PTFE
- 3) Shield Materials - Silver Plated Copper Braid
- 4) Jacket Material and Color - FEP, Tan
- 5) Impedance, Ohms - 50
- 6) Velocity of Propagation, % - 70
- 7) Maximum Operating Frequency, GHz - DC TO 6
- 8) Capacitance, pF/ft [pF/m] - 29.4 [96.46]
- 9) Maximum Operating Voltage, Volts - 2500
- 10)Operating Range, deg C - -55 to +200
- 11)Material - Copper Clad Steel
- 12)Diameter, mm - 4.95
- 13)Minimum Bend Radius, mm - 30

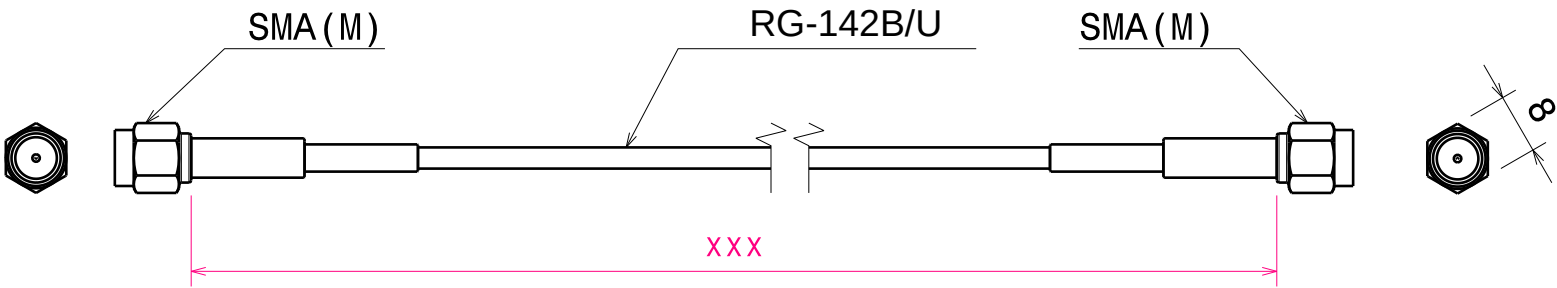

SMA MALE CONNECTOR SPECIFICATION :

- 1) INSULATORS - PTFE ASTM D 171, CRADE1 TYPE I, CLASS "B".
- 2) CRIMP NUT - BRASS PER ASTM B16, ALLOY C36000, TEMPER H02
- 3) CRIMP SLEEVE - SEAMLESS LOWLEAD BRASS TUBE, ALLOY 330, SOFT ANNEAL TEMPER
- 4) HEAT SHRINK SLEEVE - RNF100
- 5) CONTACT PIN - BRASS /PHOSPER BRONGE
- 6) CONTACT - GOLD PLATE, 1.25μ
- 7) ALL OTHER METAL PARTS - COLD PLATE, Au Flash
- 8) Maximum Operating Frequency, GHz - DC TO 6

DESIGNED BY: GURU BIRADAR		RF COAXIAL CABLE ASSY RG-142 B/U SMA M-M		I	-
DATE: 27/03/2016				H	-
CHECKED BY: Mr. S. METRI				G	-
DATE: 29/03/2016				F	-
SIZE A3		ANAND TECHNOLOGIES		E	-
SCALE NA	WEIGHT (kg) NA			D	-
DRAWING NUMBER AT-CA-SMAM-SMAM-142B/U-XXX		SHEET 1 / 1	C	-	
This drawing is our property; it can't be reproduced or communicated without our written agreement.			B	-	
			A	-	