
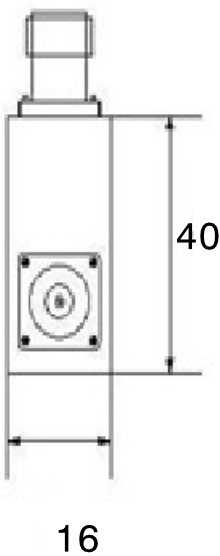
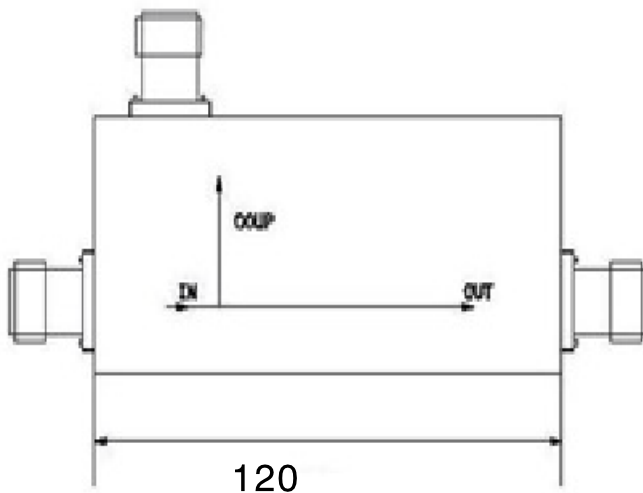


Electricl Specification

Part No	:	AT-COUPLER-800-2500
Frequency Range	:	800-2500
Insertion Loss	:	≤ 2.0 dB
Coupling/Nominal I/P(P2)	:	-5dB
Inband Ripple	:	±0.6 dB
VSWR Input(all ports)	:	≤1.20)
Directivity	:	≥20 dB
Impedance	:	50 Ω nominal
Max Power	:	200(avg),1.5K(peak)
Connector I/P and O/P	:	N Female
Connector Material(Body)	:	Brass
Housing Material	:	Aluminium
Connector Plating Inner	:	Ag or Au; Outer: Ni or Tri-m
Operating Temperature	:	25~+75 (°C)
Dimensions	:	120 x 40 mm



DESIGNED BY: Kiran Kumar		AT - COUPLER - 117.975		I	—
DATE: 15/12/2016				H	—
CHECKED BY: Mr. S. Metri				G	—
DATE: 16/12/2016				F	—
SIZE A3		ANAND TECHNOLOGIES		E	—
SCALE 1 : 1	WEIGHT (kg) XXX			D	—
DRAWING NUMBER AT - COUPLER - 800 - 2500		SHEET 1 / 1		C	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.				B	—
				A	—