



Electricl Specification

Part No	:	AT-LA-2000
Impedance	:	50 Ω
Frequency Range	:	(800-2000) MHz
VSWR/Return loss	:	<1.13:1/<-24
Insertion Loss	:	<0.1 dB
Average Power	:	700 (W)
PIM	:	<-160 dB
Max Surge Current	:	50kA(8/20μs wave-form)
Residual Pulse Voltage	:	<100v(50ka 8/20μs wave-form)
Residual Pulse Voltage	:	<1V(4KV /2KA 1.2×50 8/20μs wave-form)
Energy Througput Voltage	:	<1nJ(4KV /2KA 1.2×50 8/20μs wave-form)
Protection Ciruit	:	DC BLOCKED

Mechanical Specification

Dimensions	:	X x øY
Weatherization	:	IEC 60068 55/155/56 & 1P67
Operating Temperature	:	-40 to +85(°C)
Thermal Shock	:	US MIL-STD 202, Meth.107, Cond.B
Vibration	:	US MIL-STD 202, Meth.204, Cond.B
Shock	:	US MIL-STD 202, Meth.213, Cond.i
ROHS Complaint	:	Yes
Mating Life Cycle	:	>500
Recommended Coupling	:	
Nut Torque	:	220 to 300lb-in

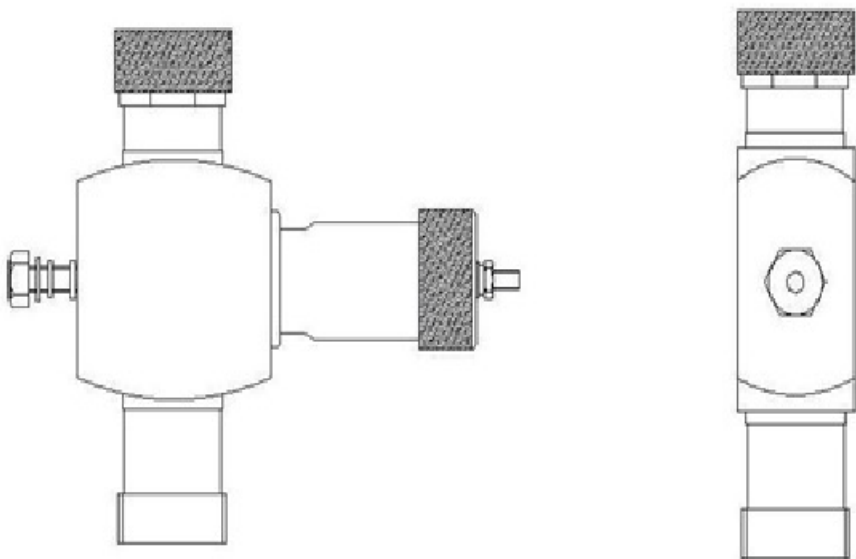

DESIGNED BY: Kiran Kumar		LIGHTNING ARRESTOR		I	-
DATE: 15/12/2016				H	-
CHECKED BY: Mr. S. Metri				G	-
DATE: 16/12/2016		ANAND TECHNOLOGIES		F	-
SIZE A3				E	-
SCALE 1 : 1				D	-
WEIGHT (kg) XXX	DRAWING NUMBER AT-LA-2000	SHEET 1 / 1	C	-	
This drawing is our property; it can't be reproduced or communicated without our written agreement.			B	-	
			A	-	