


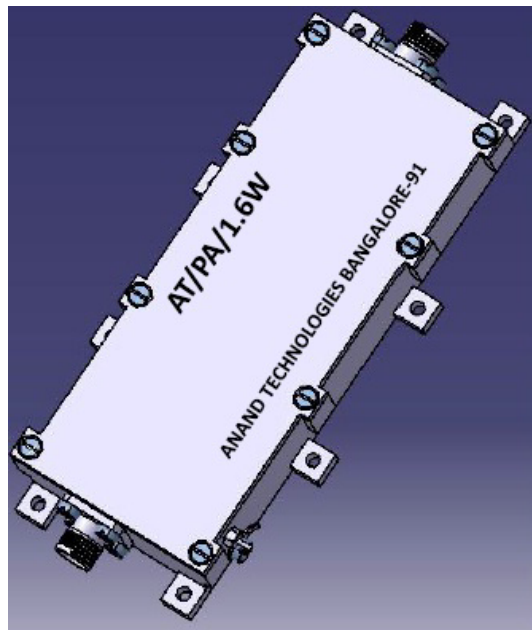

Typical Applications


- Repeaters
- Mobile infrastructure
- LTE, CDMA, GSM, GPRS, WCDMA
- General purpose wireless

Features

- 2000-2500 MHz
- 35 dB Linear Gain at 2.3 GHz
- 7.0 dB Noise Figure at 2.3 GHz
- 50 Ω Cascadable Gain Block
- Unconditionally Stable
- Miniature Package

Electrical Specifications (at 25°C)


Operating Frequency Range	2000 to 2500 MHz
Linear Gain	35 dB (Min)
Input Return Loss	12 dB
Output Return Loss	10 dB
Output Power (Pout)	+32 dBm (Min), with 0 dBm Power Input
Noise Figure	7.0 dB (Max)
In / Out Connector	SMA (F)
Power Supply	+6.5 V , 1.1 Amp (Max)
Operating Temperature	-30 to +55°C
Finish	Al Alloy Housing
Heat Transfer	Through Base Plate mounted on external heat sink

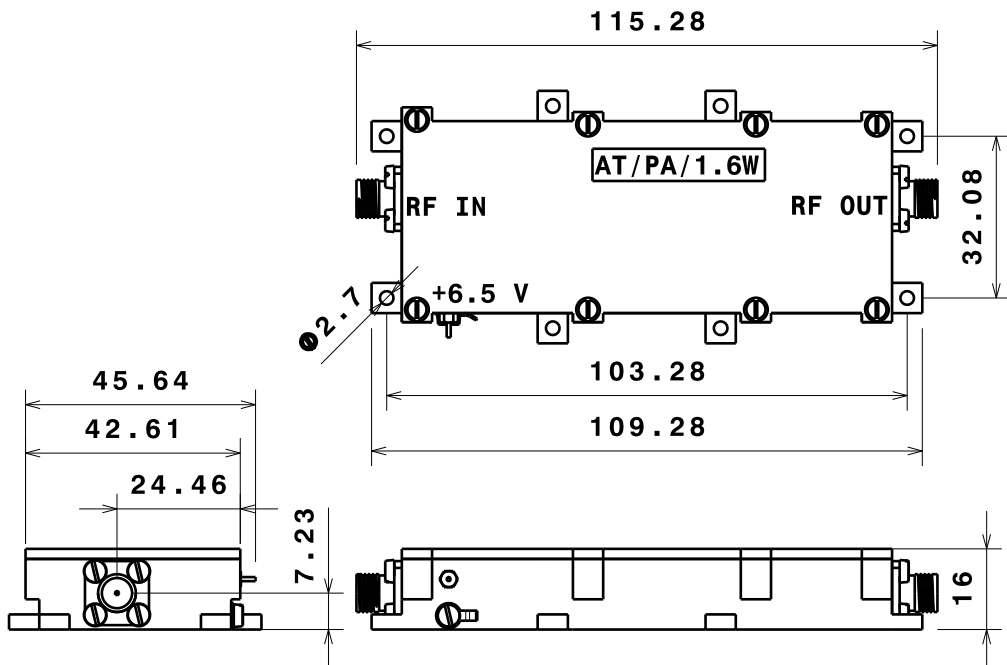

General Description

The AT/PA/1.6W is a high dynamic range, high power output multistage amplifier packaged in a miniature housing, operating on single supply with inbuilt regulator.

The AT/PA/1.6W covers 2.0 to 2.5 GHz frequency band and is targeted for wireless infrastructure or other applications requiring high power output with fairly medium noise figure.

DESIGNED BY: GURU BIRADAR		POWER AMPLIFIER		I	—
DATE: 02/08/2017				H	—
CHECKED BY: Mr. S. METRI				G	—
DATE: 02/08/2017		ANAND TECHNOLOGIES		F	—
SIZE				E	—
A3				D	—
SCALE	WEIGHT (kg)			C	—
2:3	NA	DRAWING NUMBER AT/PA/1.6W		B	—
		SHEET 1 / 1		A	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.					