


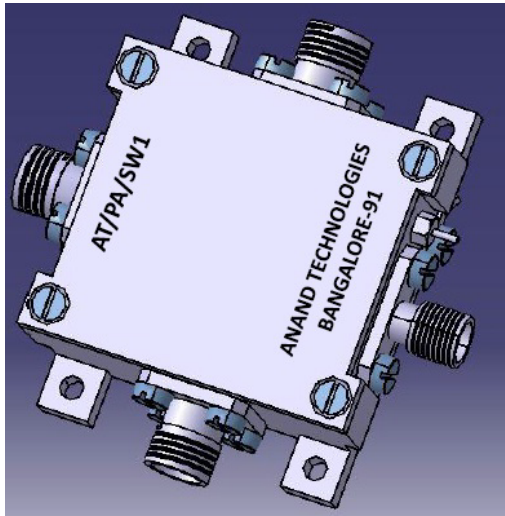

Typical Applications


- Repeaters
- Mobile infrastructure
- LTE, CDMA, GSM, GPRS, WCDMA
- General purpose wireless

Features

- 400 - 2600 MHz
- 1 dB Insertion Loss at 2.3GHz
- 50 dB Isolation at 2.3 GHz
- 50 Ω Internal Termination
- TTL Control
- High Power Capability
- Miniature Package

Electrical Specifications (at 25°C)

Operating Frequency Range	400 to 2600 MHz
Insertion Loss	1.1 dB (Max)
Input Return Loss	16 dB
Output Return Loss	16 dB
Isolation	45 dB (Min)
Input Power Handling(Pin)	2 W (Max)
TTL Control	0 / +5V
In / Out Connector	SMA (F)
Power Supply	+6.5 V , 10 mA (Max)
Operating Temperature	-30 to +55°C
Finish	Al Alloy Housing
Heat Transfer	Through Base Plate mounted on external heat sink

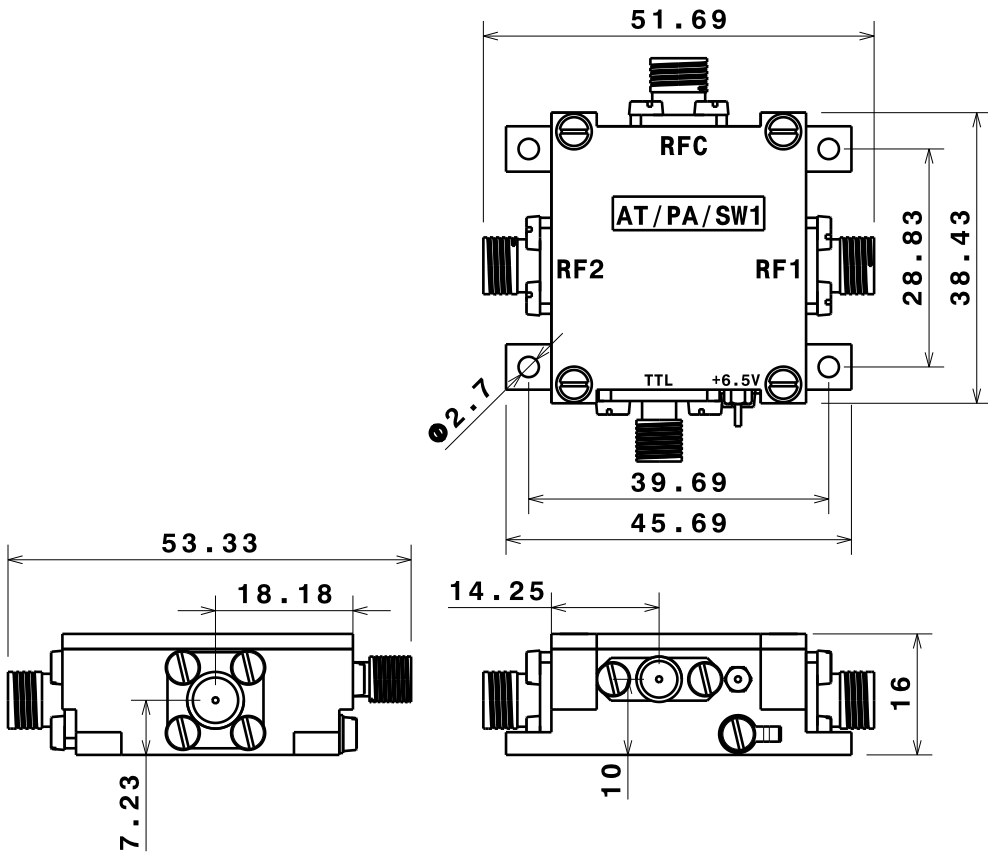

General Description

The AT/PA/SW1 is a High Isolation, Low Insertion Loss SPDT Switch packaged in a miniature housing, operating on single supply with inbuilt regulator.

The AT/PA/SW1 covers 0.4 to 2.6 GHz frequency band and is targeted for Transmit/Receive switching with applications in wireless infrastructure and related areas, requiring high power, high isolation and low insertion loss capability.

DESIGNED BY: GURU BIRADAR	SPDT SWITCH (MEDIUM POWER)		I	-
DATE: 02/08/2017			H	-
CHECKED BY: Mr. S. METRI			G	-
DATE: 02/08/2017	ANAND TECHNOLOGIES		F	-
SIZE A3			E	-
SCALE 1:1	WEIGHT (kg) NA	DRAWING NUMBER AT/PA/SW1	D	-
			C	-
			B	-
			A	-
SHEET 1 / 1				

This drawing is our property; it can't be reproduced or communicated without our written agreement.