


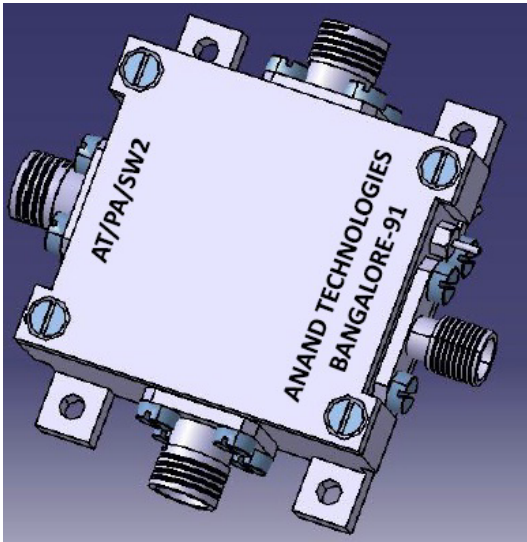

Typical Applications

- Repeaters
- Mobile infrastructure
- LTE, CDMA, GSM, GPRS, WCDMA
- General purpose wireless

Features


- 400 - 2600 MHz
- 1.1 dB Insertion Loss at 2.3GHz
- 25 dB Isolation at 2.3 GHz
- 50 Ω Impedance Block
- TTL Control
- High Power Capability
- Miniature Package

Electrical Specifications (at 25°C)

Operating Frequency Range	400 to 2600 MHz
Insertion Loss	1.2 dB (Max)
Input Return Loss	16 dB
Output Return Loss	16 dB
Isolation	25 dB (Min)
Input Power Handling(Pin)	10 W (Max) RFC to Tx Path, 6 W (Max) RFC to Rx Path
TTL Control	0 / +5 V
In / Out Connector	SMA (F)
Power Supply	+6.5 V , 10 mA (Max)
Operating Temperature	-30 to +55°C
Finish	Al Alloy Housing
Heat Transfer	Through Base Plate mounted on external heat sink

General Description

The AT/PA/SW2 is a High Isolation, Low Insertion Loss SPDT Switch packaged in a miniature housing, operating on single supply with inbuilt regulator. The AT/PA/SW2 covers 0.4 to 2.6 GHz frequency band and is targeted for Transmit/Receive switching with applications in wireless infrastructure and related areas, requiring high power, high isolation and low insertion loss capability.

DESIGNED BY: GURU BIRADAR DATE: 02/08/2017		SPDT SWITCH (HIGH POWER)	I	—
CHECKED BY: Mr. S. METRI DATE: 02/08/2017			H	—
SIZE A3			G	—
		ANAND TECHNOLOGIES	F	—
SCALE 1 : 1			E	—
WEIGHT (kg) NA			D	—
DRAWING NUMBER AT / PA / SW2		SHEET 1 / 1	C	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.			B	—
			A	—