

H

G

F

E

D

C

B

A

4

4

3

3

2

2


1


1



Electricl Specification

Part No	:	AT-VA-DR-1000-110
Frequency Range	:	DC-1000 MHz
Impedance	:	50 Ω
Attenuation range	:	0-110 dB
Attenuation Step	:	1 dB
VSWR	:	1.2:1 max DC- 500 MHz
	:	1.5:1 max 500- 1000 MHz
Insertion Loss	:	0.5 dB max
Attenuation Accuracy	:	± 0.2 dB or 1% DC-500MHz
	:	± 0.3 dB or 2% 500-1000MHz
RF I/P Power	:	2 watts average
	:	1000 watts peak
Direction of Rotation	:	Attenuation increases in clockwise direction
Indexing	:	30 degree with stops at minimum and maximum
RF Connector	:	BNC, SMA, TNC AND N
Operating Temperature	:	-20 to +85

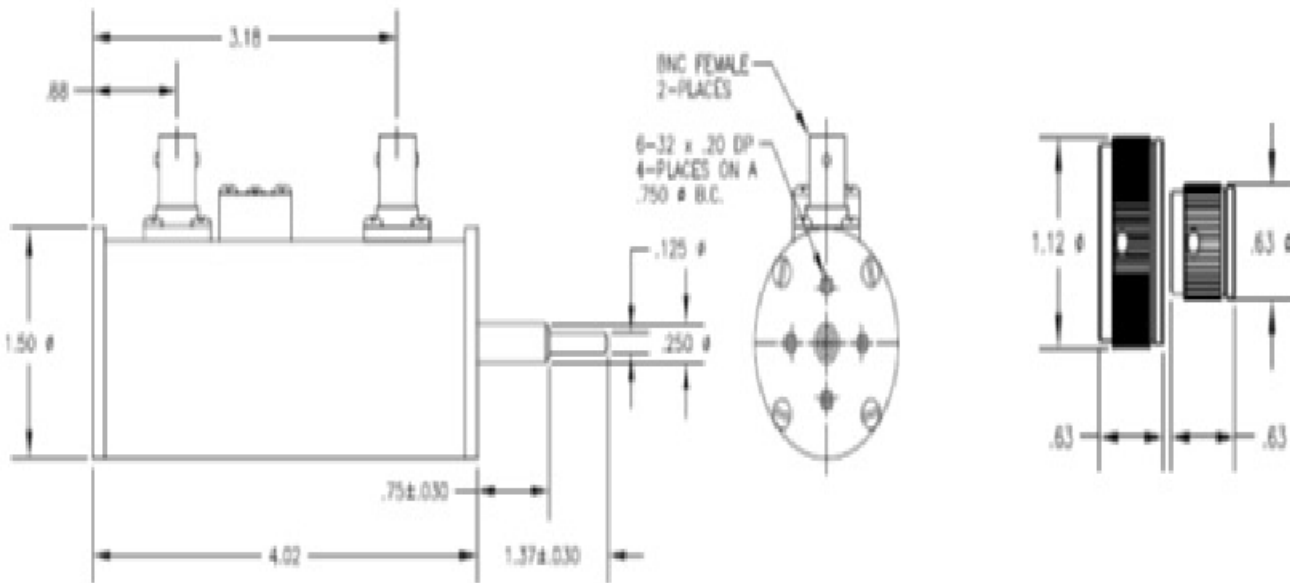

DESIGNED BY: Kiran Kumar		AT - VA - DR - 1000 - 110	I	—
DATE: 15/12/2016			H	—
CHECKED BY: Mr. S. Metri			G	—
DATE: 16/12/2016			F	—
SIZE A3		ANAND TECHNOLOGIES	E	—
SCALE 1 : 1	WEIGHT (kg) XXX		D	—
DRAWING NUMBER AT - VA - DR - 1000 - 110		SHEET 1 / 1	C	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.			B	—
			A	—

H

G

B

A