

4

3

2

1

4

3

2

1

Specification

Part No : AT-VA-SR-3000-10

Frequency Range : DC-3000 MHz

Impedance : 50 Ω

Attenuation Range : 0-10 dB

Attenuation Step : 1 dB

VSWR : 1.2:1 max DC-1000MHz
1.3:1 max 1000-2000MHz
1.4:1 max 2000-3000MHz

Insertion loss : 0.5dB maximum
0.11dB max typical @ 1000MHz
0.23dB max typical @ 2000MHz
0.28dB max typical @ 3000MHz

Attenuation Accuracy : ±0.5 dB

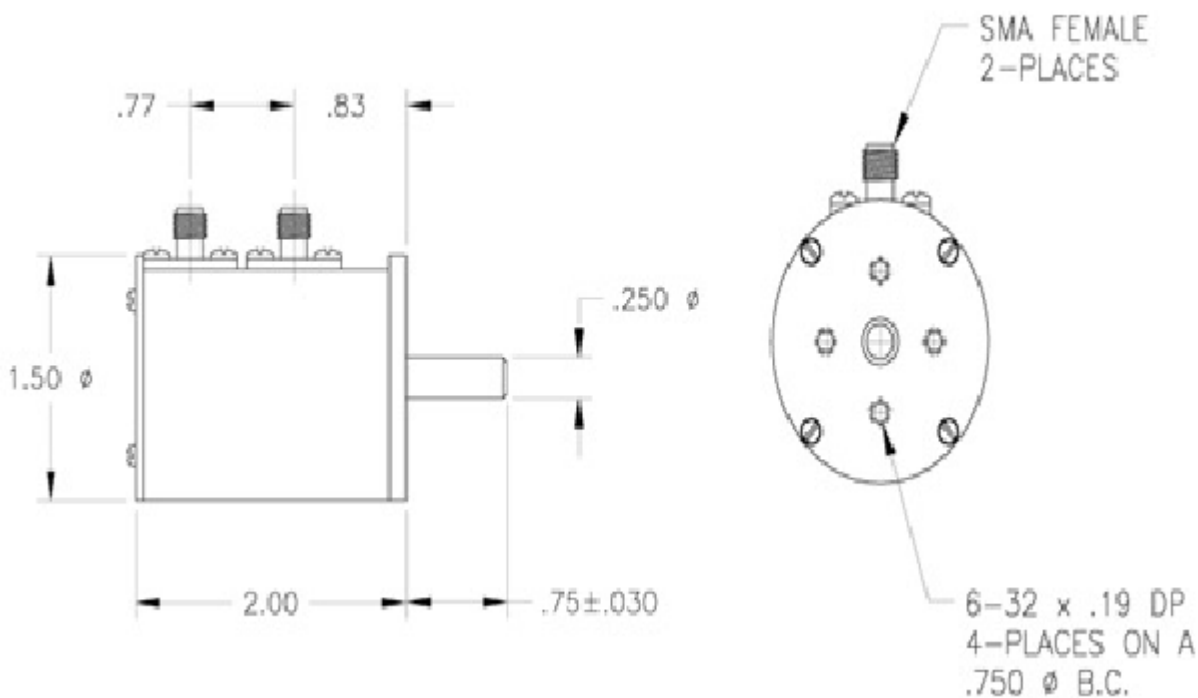
RF Input Power : 2 watts average
1000 watts peak



Direction of Rotation : Attenuation increases in clockwise direction

Indexing : 30 degree with stops at minimum and maximum

RF Connector : SMA Female

Operating Temperature : -20 to +85(°C)



DESIGNED BY: Kiran Kumar		AT - VA - SR - 3000 - 10		I	—
DATE: 15/12/2016				H	—
CHECKED BY: SM				G	—
DATE: 16/12/2016		ANAND TECHNOLOGIES		F	—
SIZE A3				E	—
				D	—
		C	—		
		B	—		
SCALE 1 : 1	WEIGHT (kg)	DRAWING NUMBER AT - VA - SR - 3000 - 10	SHEET 1 / 1	A	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.					

H

G

B

A