

H

G

F

E

D

C

B

A

Electricl Specification




Part No	:	AT-Attenuator
Frequeny range	:	DC to 3 GHz
Attenuation	:	3,6,10,20,30,40 dB
Attenuation Accuracy	:	0.7 dB from DC to 3 GHz
Nominal Impedance	:	50 Ω
Avg Power	:	25 W
Operating Temperature	:	-55 to +125
RF Connector	:	N

FREQ RANGE -GHz	Typical VSWR(:1)	Max VSWR(:1)
DC to 1	1.15	
1 to 2	1.25	
2 to 3	1.30	
Dc to 3		1.35


Material And plating

PARTS	MATERIAL	PLATING (micro-inch)
Body & Nut	Aluminium	Black Anodize
Contact (M/F)	QSn6.5-0.1	Gold 30
Insulator	Teflon	

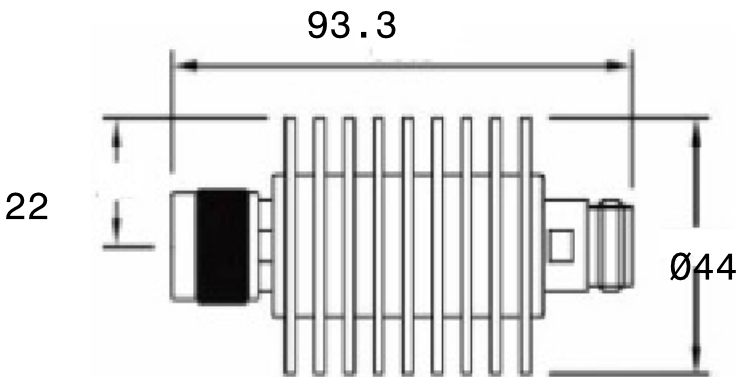

Features

- 1) High Power
- 2) High Attenuation Accuracy
- 3) Small VSWR

DESIGNED BY: Kiran Kumar		FIXED ATTENUATOR		I	-
DATE: 15/12/2016				H	-
CHECKED BY: Mr. S. Metri				G	-
DATE: 16/12/2016		ANAND TECHNOLOGIES		F	-
SIZE A3				E	-
SCALE 1 : 1	WEIGHT (kg) XXX	FIXED ATTENUATOR		D	-
DRAWING NUMBER				C	-
				B	-
				A	-
This drawing is our property; it can't be reproduced or communicated without our written agreement.					