


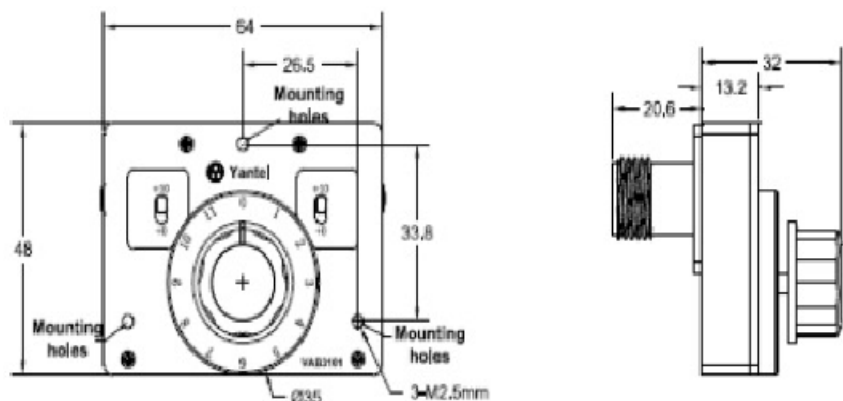

Freq. Range (GHz)	VSWR(:1)	
	Typ.	Max.
DC to 1.5	1.15	1.35
1.5 to 2.5	1.35	1.50
2.5 to 2.7	1.15	1.35

Attenuation 1~11dB

Freq. Range (GHz)	VSWR(:1)	
	Typ.	Max.
DC to 2	1.15	1.35
2 to 2.5	1.30	1.50
2.5 to 2.7	1.45	1.60


Attenuation 12~31dB

Freq. Range (GHz)	VSWR(:1)	
	Typ.	Max.
DC to 2.7	1.10	1.35

Electricl Specification

Part No	:	Attenuator - VA-1
Frequeny range	:	DC to 2.7 GHz
Attenuation	:	0 to 31 dB
Step Value	:	1 dB
Insertion Loss at 0 dB	:	0.7 dB at 2 GHz 1.2 dB at 2.7 GHz
Attenuation Accuracy	:	0.3 dB at 1GHz(Typical) 0.5 dB at 1GHz(max) 0.7 dB at 2GHz(yypical) 1.1 dB at 2GHz(max) 1.3 dB at 2.7GHz(typical) 1.5 dB at 2.7GHz(max)
Nominal Impedance	:	50 Ω
Avg Power	:	2 W
Operating Temperature	:	-40 to +85(° C)

- Features
- Ultra small size with innovative microstrip technology
 - Available step value:0~31dB.
 - High accuracy
 - High performance low cost
 - Impedance: 50 or 75 ohm
 - Operation repeatability:1000 times each switch
 - POM material in rotary switch,operating up to 85°C

DESIGNED BY: Kiran Kumar		Attenuator VA1		I	—
DATE: 15/12/2016				H	—
CHECKED BY: Mr. S. Metri				G	—
DATE: 16/12/2016		ANAND TECHNOLOGIES		F	—
SIZE A3				E	—
SCALE 1 : 1	WEIGHT (kg) XXX			D	—
DRAWING NUMBER Attenuator VA1		SHEET 1 / 1	C	—	
This drawing is our property; it can't be reproduced or communicated without our written agreement.			B	—	
			A	—	