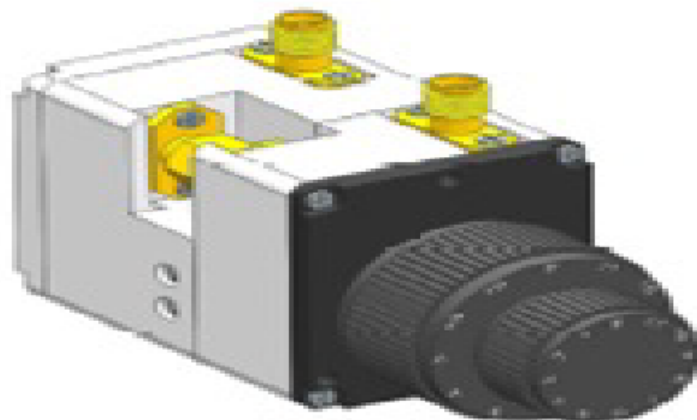


Attenuation Accuracy (Typical)

Attenuation (dB)	Freq. Range (GHz)	Attenuation Accuracy (dB)
0 to 31	DC to 2.5	±0.7
0 to 31	DC to 2.7	-0.7 to +0.9

Nominal Impedance 50 Ohm
Average Power 2 Watt, 5 Watt
Operating Temperature -40°C to +85°C

Attenuation 0~31dB

Freq. Range (GHz)	VSWR(1)	
	Typ.	Max.
DC to 2.7	1.25	1.40

Specifications

Part No : Attenuator-VA-2
Frequency Range : DC to 2.7 GHz
Attenuation : 0 to 31dB
Step Value : 1 dB
Insertion loss at 0dB : 0.6dB at 2.7GHz

Features

- Ultra small size with innovative microstrip technology
- Available step value:0~31dB.
- High accuracy
- High performance low cost
- Impedance: 50
- Operation repeatability:1000 times each switch
- POM material in rotary switch,operating up to 85°C
- Smart size

DESIGNED BY: Kiran Kumar	Attenuator VA2		I	—
DATE: 15/12/2016			H	—
CHECKED BY: Mr. S. Metri			G	—
DATE: 16/12/2016	ANAND TECHNOLOGIES		F	—
SIZE A3			E	—
SCALE 1:1	WEIGHT (kg) XXX	DRAWING NUMBER Attenuator VA2	D	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.		SHEET 1 / 1	C	—
			B	—
			A	—