


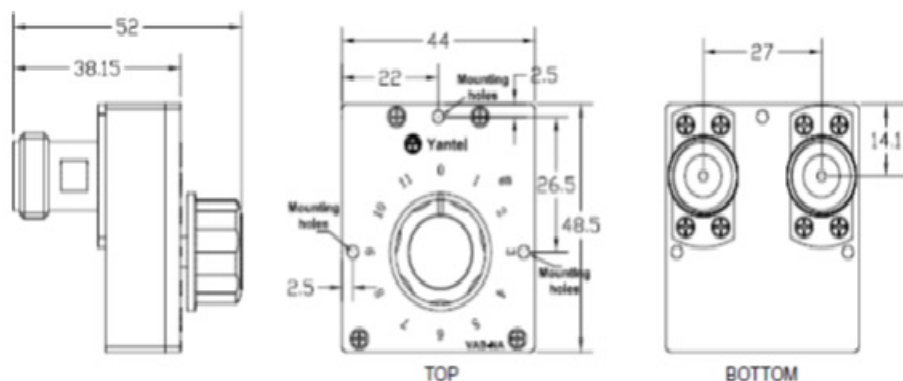


Features

- Ultra small size with innovative microstrip technology
- Available step value: 0dB, 1dB, 2dB, 3dB, 4dB, 5dB, 6dB, 7dB, 8dB, 9dB, 10dB, 11dB.
- High accuracy
- High performance low cost
- Impedance: 50 or 75 ohm
- Operation repeatability: 500 times each switch
- POM material in rotary switch, operating up to 85°C

Specifications

Part No	:	Attenuator-VA-3
Frequency Range	:	DC to 2.7 GHz
Attenuation	:	0 to 11dB
Step Value	:	1 dB
Insertion loss at 0 dB	:	0.5dB at 2GHz / 1.0dB at 2.7GHz
Attenuation Accuracy	:	0.2 dB at 1GHz (typical) 0.5dB at 1GHz (max) 0.7dB at 2GHz (typical) 1.0dB at 2GHz (max) 0.7dB at 2.7GHz (typical) 1.5dB at 2.7GHz (max)
Nominal Impedance	:	50 Ω
Average Power	:	2 W
Operating Temperature	:	-40 to +85(°C)

Freq. Range (GHz)	VSWR(:1)	
	Typ.	Max.
DC to 2	1.10	1.35
2.0 to 2.5	1.25	1.50
2.5 to 2.7	1.35	1.60

DESIGNED BY: Kiran Kumar		Attenuator VA3		I	—
DATE: 15/12/2016				H	—
CHECKED BY: Mr. S. Metri				G	—
DATE: 16/12/2016				F	—
SIZE A3		ANAND TECHNOLOGIES		E	—
SCALE 1:1	WEIGHT (kg) XXX	Attenuator VA3		D	—
DRAWING NUMBER				C	—
SHEET 1/1				B	—
				A	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.					