


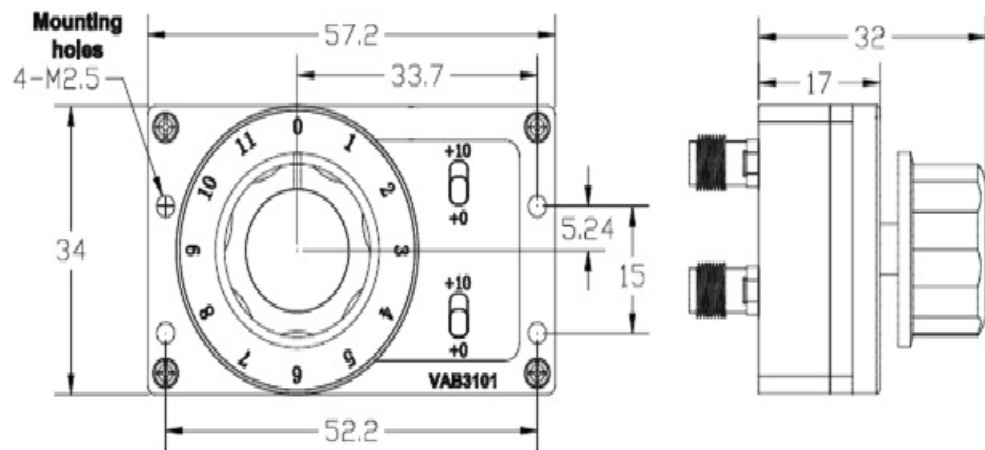


Features

- Ultra small size with innovative microstrip technology
- Available step value:0~31dB.
- High accuracy
- High performance low cost
- Impedance: 50
- Operation repeatability:1000 times each switch
- POM material in rotary switch,operating up to 85°C
- Smart size

Specifications

Part No	:	Attenuator-VA-6
Frequency Range	:	DC to 2.7 GHz
Attenuation	:	0 to 31dB
Step Value	:	1 dB
Insertion loss at 0dB	:	0.3dB at 2.7GHz 0.65 dB
Attenuation Accuracy	:	±0.6 dB from DC to2.7GHz(typical)
Nominal Impedance	:	50 Ω
Average Power	:	2/5 W
Operating Temperature	:	-40 to +85(°C)
Attenuation	:	0~31dB
RF Connector	:	SMA

Freq. Range (GHz)	VSWR(:1)	
	Typ.	Max.
DC to 2.7	1.15	1.30

DESIGNED BY: Kiran Kumar		Attenuator VA6	I	—
DATE: 15/12/2016			H	—
CHECKED BY: Mr. S. Metri			G	—
DATE: 16/12/2016			F	—
SIZE A3		ANAND TECHNOLOGIES	E	—
SCALE 1 : 1	WEIGHT (kg) XXX		D	—
DRAWING NUMBER Attenuator VA6		SHEET 1 / 1	C	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.			B	—
			A	—