



DO NOT CHANGE THE LOCATIONS OF THE INPUTS OR OUTPUTS! IF YOU DO SO, YOU NEED TO MAKE SURE THE PINS ARE IN THE RIGHT PLACES!

INSTRUCTION FETCH

This is the current PC that you need to send as OUTPUT


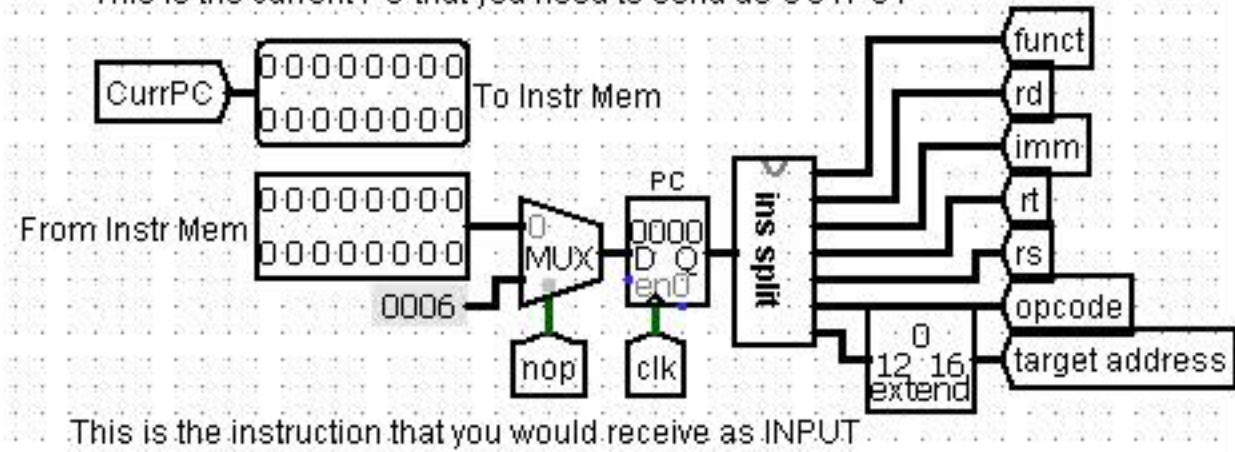


INSTRUCTION DECODE

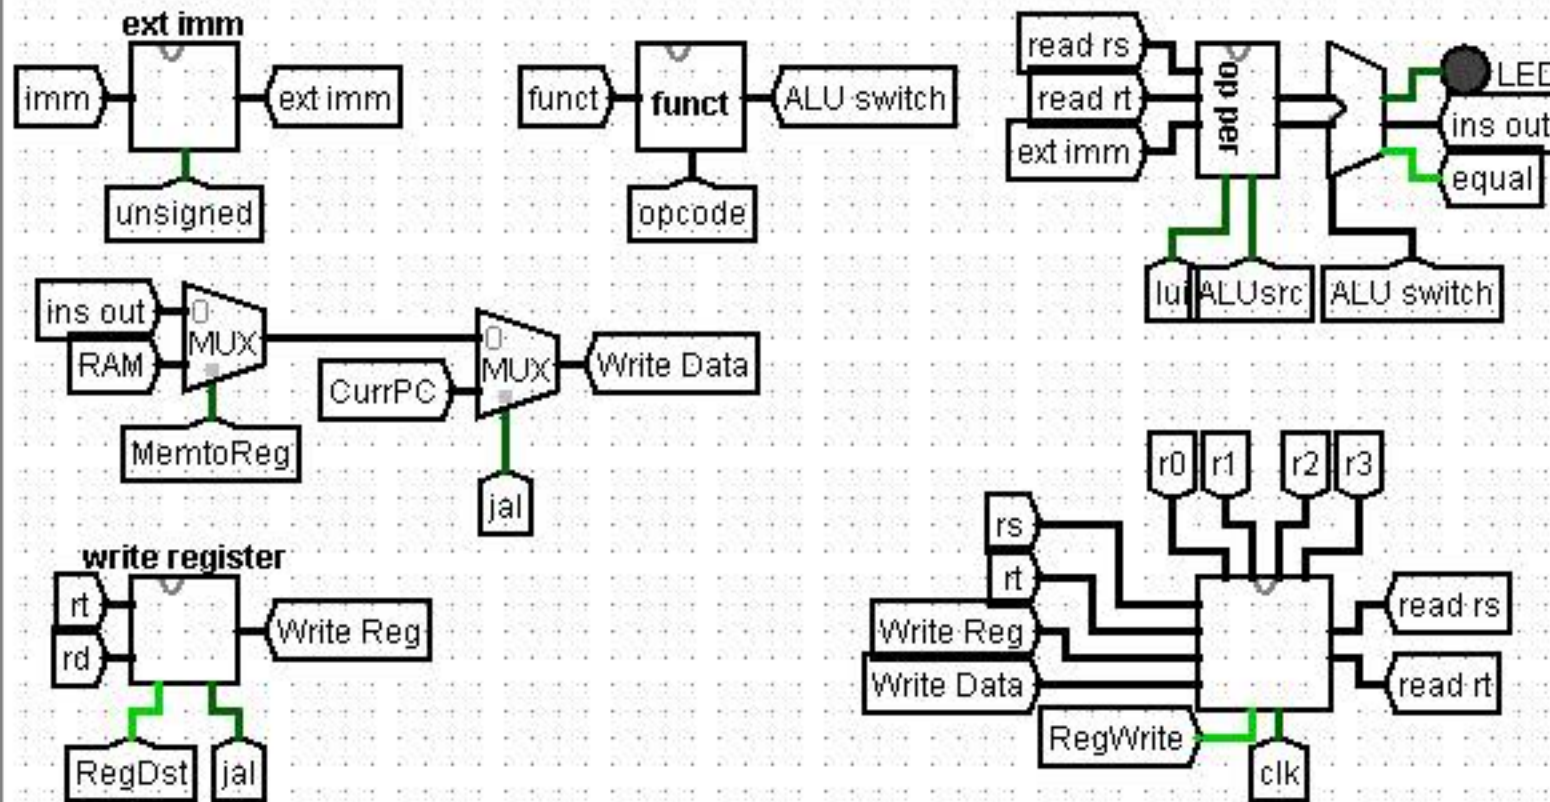


This is a CLK that is an INPUT driven from the harness.
Remember, this circuit is loaded from the harness to be tested!

INSTRUCTION EXECUTE

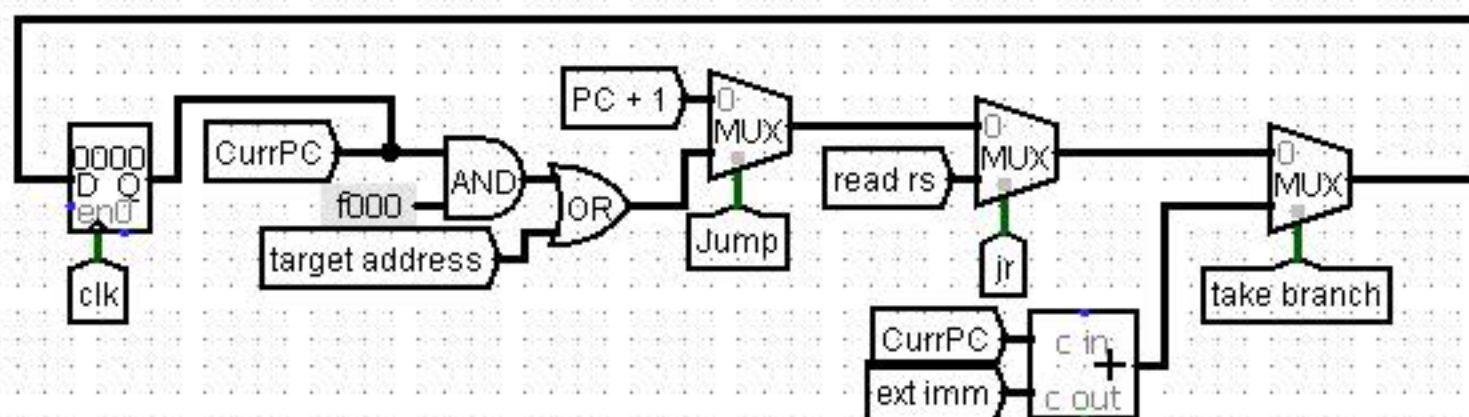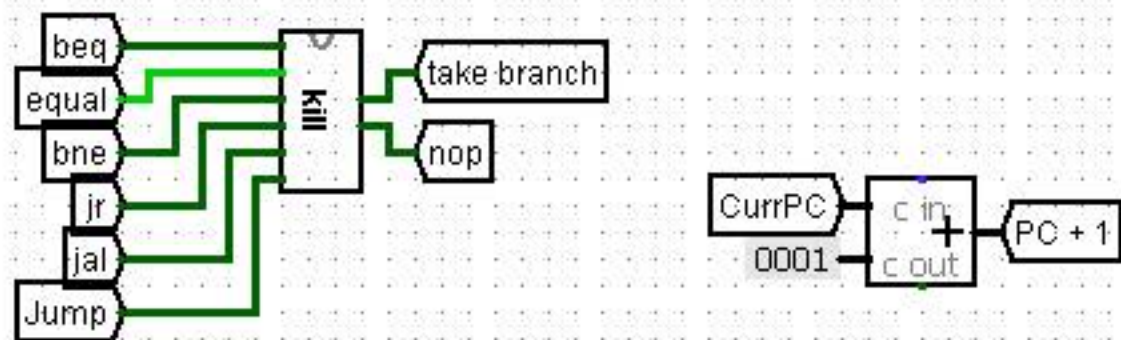


DATA MEMORY

These are OUTPUTS of the circuit

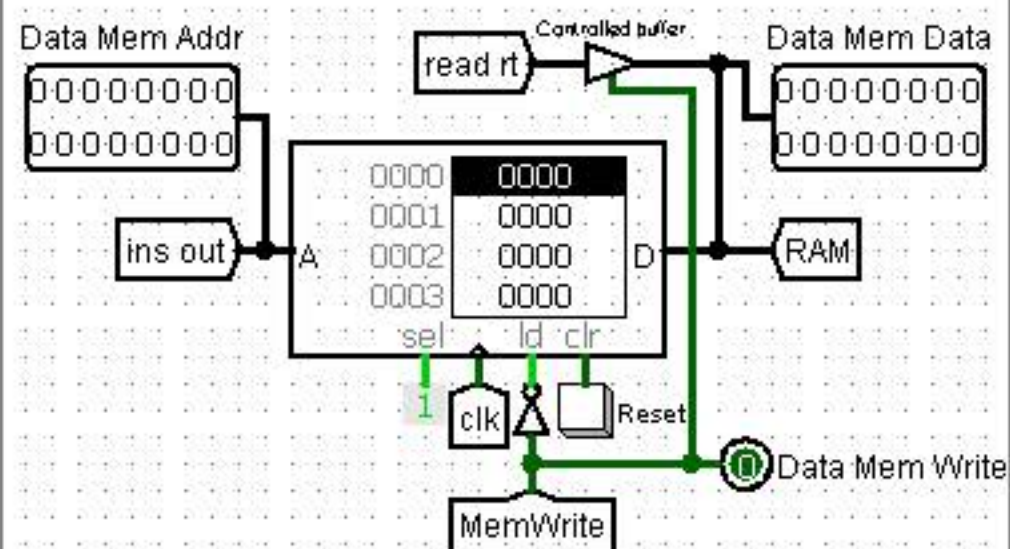

CONTROL

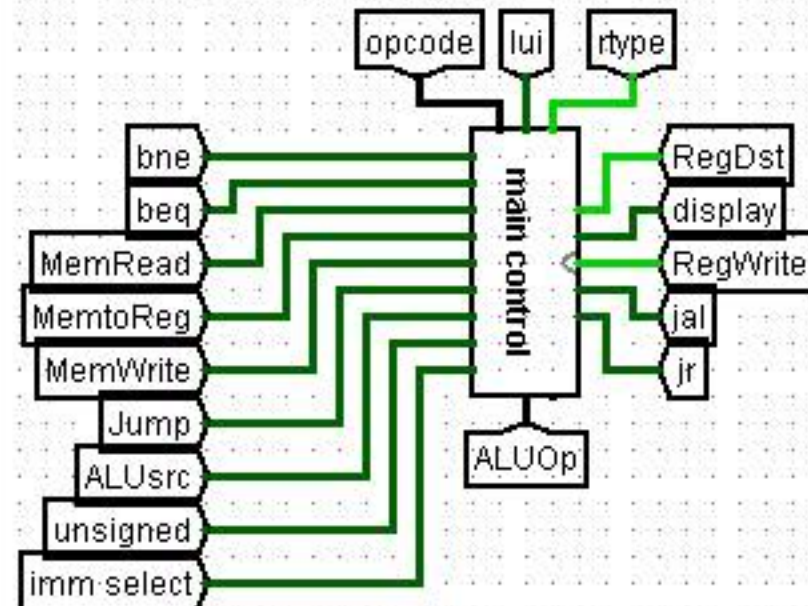

DISPLAY

