


ITEM	PART#	QTY	DE
1	SWPC06.312–00001		6 5/16" O.D. S.W
			A139 CARBON S
2		5	MIDDLE SEGMENT
3		2	END SEGMENT AT
4	FLRC08.188–00001	2	10" O.D. x 6 13
			ROT'G FLG. w/
			(A.C.,3")
5	RINC08.188–00001	2	7 7/16" O.D. x
			STEEL RING (A.C
6		4	FLANGE STOP
7	ALEC02.600–00001		2.63" I.D. x 1" T
8			PORTLAND TYPE

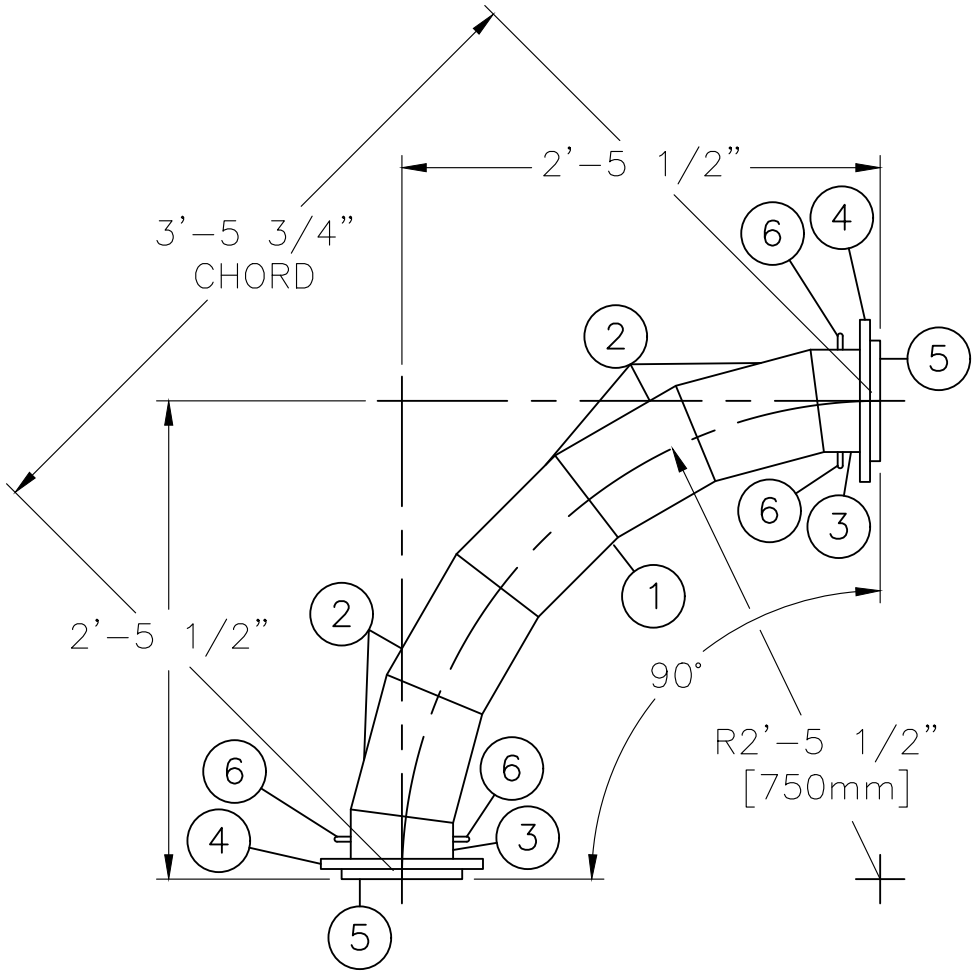



GM–04

ELBOW



M.S.	OUT. LG. 8.599" / INS. LG. 6.936"	∠ =7.500°	E.S.	OUT. LG. 4.049" / INS. LG. 3.218"	∠ =7.500°

2.6" I.D. KALOCER LINED ELBO

GENERAL NOTES:
1.) All pieces to receive (2) coats of lead free red oxide shop primer, prior to shipment.

MATERIAL MARKED "N" NOT FURNISHED BY ABRESIST CORPORATION

REV.	DATE	BY	DESCRIPTION
F			
E			
D			
C			
B			
A	10–09–18	CRK	APPROVED FOR FABRICATION

THIS DRAWING NOT TO BE DISCLOSED USED DUPLICATED OR RETAINED EXCEPT AS PERMITTED BY ABRESIST CORPORATION.

Kalenb
Wear Protection

KALENBORN ABRESIST CORPORATION
5541 North State Road 13 URBANA, INDIANA 46990 (260)–774–3327 www.abresist.com

DFTR.	DATE:	PLT. MGR.	DATE:
CRK	10–08–18	SAD	
CHKD.	DATE:	CHKD.	DATE:
CWH	10–08–18	CEW	10–08–18

SCALE: 1"=1'–0" UNLESS OTHERWISE NOTED

TOLERANCES: DIM AN

DWG. No. FGAE–02