

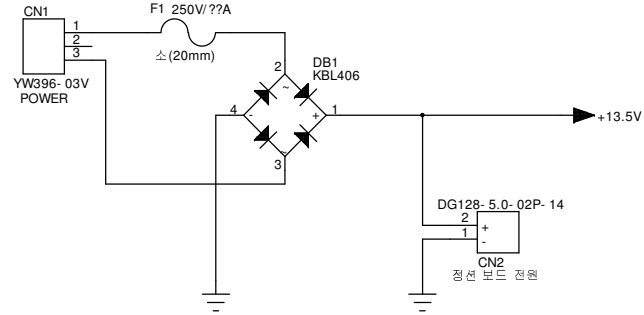


전원부


DC15V/3.3A

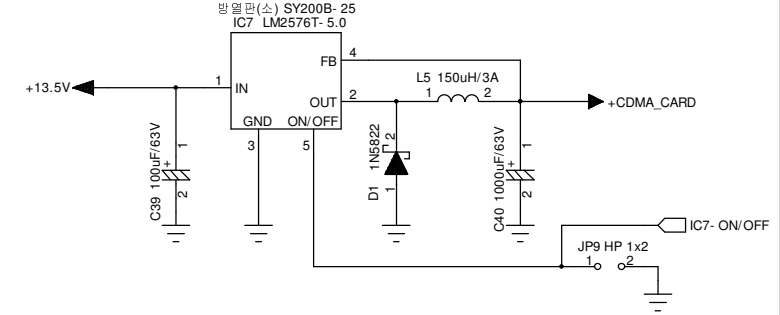


통신부

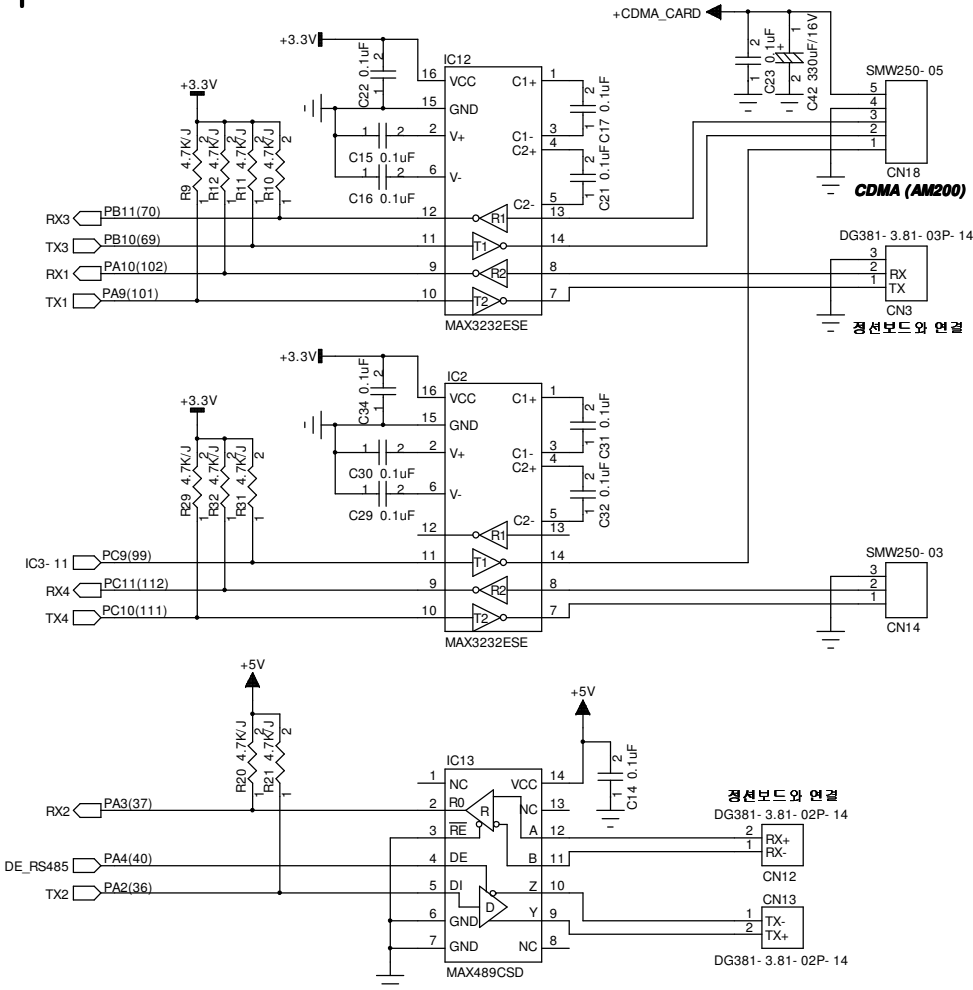


IC과 전해콘덴서 C43, C44 간격 넓게 유지 할 것.

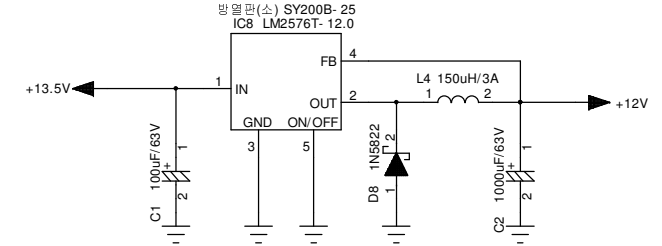

IC8과 전해콘덴서 C1, C2 간격 넓게 유지 할 것.

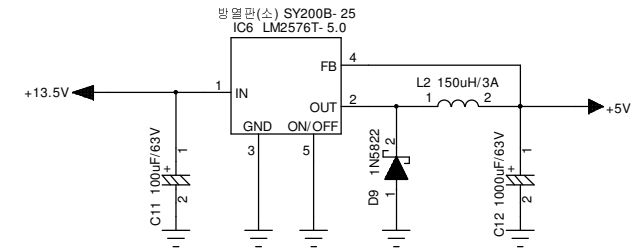

IC6와 전해콘덴서 C39, C40 간격 넓게 유지 할 것.

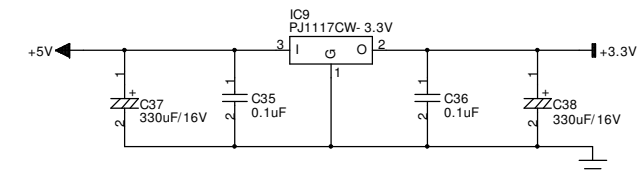

FILE NAME				NEW GPI- 8210 (전원,통신)			
연구소공유\ 제품개발				Title GTECH- PMA- 8210 VER 0.1			
담당	발행	연구소장	기술교본	Size A3	Document Number GPI- 8210- ET- 000- 00		Rev R0
E. J. LEE				Date: 2014- 08- 05			
				Sheet 1 of 3			

디스플레이 (LCD)

3.3V

PE1(142) LCD_RESET

C25 10uF/16V

CN6

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40

PA5(41) LCD_SCK

PE5(4) A21/LCD_TOUCH_CS

PA7(43) LCD_MOSI

PA6(42) FSMC_NOE/LCD_RD

PD5(119) LCD_MISO

FSMC_NWE/LCD_WR

PD7(123) FSMC_NCE2/LCD_CS

PD11(80) A16/LCD_RS

PE10(63) D7

PE9(60) D6

PD1(115) D3

PD8(77) D13

PE8(59) D5

PE15(68) D12

PE7(58) D4

PE14(67) D11

PD0(114) D2

PE13(66) D10

PD15(88) D1

PE12(65) D9

PD14(85) D8

PD9(78) D14

PE11(64) D8

PD13(82) +5V

A18/LCD_PWM

PD10(40) D15

+3.3V


R24 10K/J

PE6(5) A22/LCD_TOUCH_IRQ

R25 1K/J

C26 1uF

HIF3F-40PA-2.54DSA

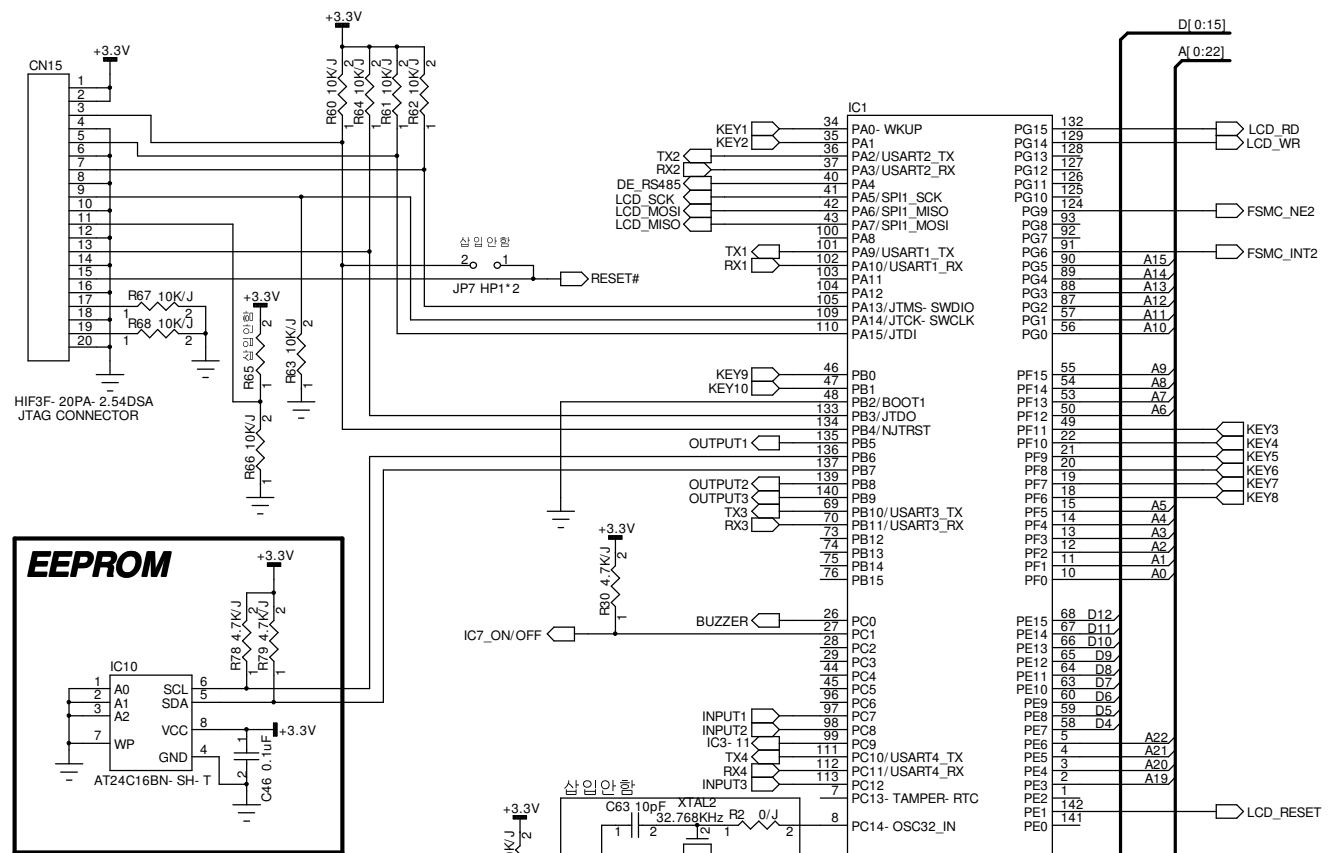

멤브레인키

Diagram illustrating the wiring for a Membrane Keyboard (멤브레인키) connected to a microcontroller via a 10-pin connector (CN4).

The connector pins are labeled 1 through 10. The corresponding key labels and pin numbers are:

- KEY1: PA0(34) - Pin 1
- KEY2: PA1(35) - Pin 2
- KEY3: PF11(43) - Pin 3
- KEY4: PF10(22) - Pin 4
- KEY5: PF9(21) - Pin 5
- KEY6: PF8(20) - Pin 6
- KEY7: PF7(19) - Pin 7
- KEY8: PF6(18) - Pin 8
- KEY9: PB0(46) - Pin 9
- KEY10: PB1(47) - Pin 10



The connector is labeled CN4 and FC2254-10S.

The circuit includes a 10V supply connected to the ground of the keyboard and a 1K/J resistor connected to the ground of the keyboard.

부저


The diagram shows a buzzer circuit. A 5V supply is connected to pin 1 of a TR1 A1266 transistor. The transistor's emitter is grounded, and its base is connected to pin 3 of a BUZZER through a 10K/J resistor. The buzzer is also connected to pin 26 of a PC0(26) component.

고정홀

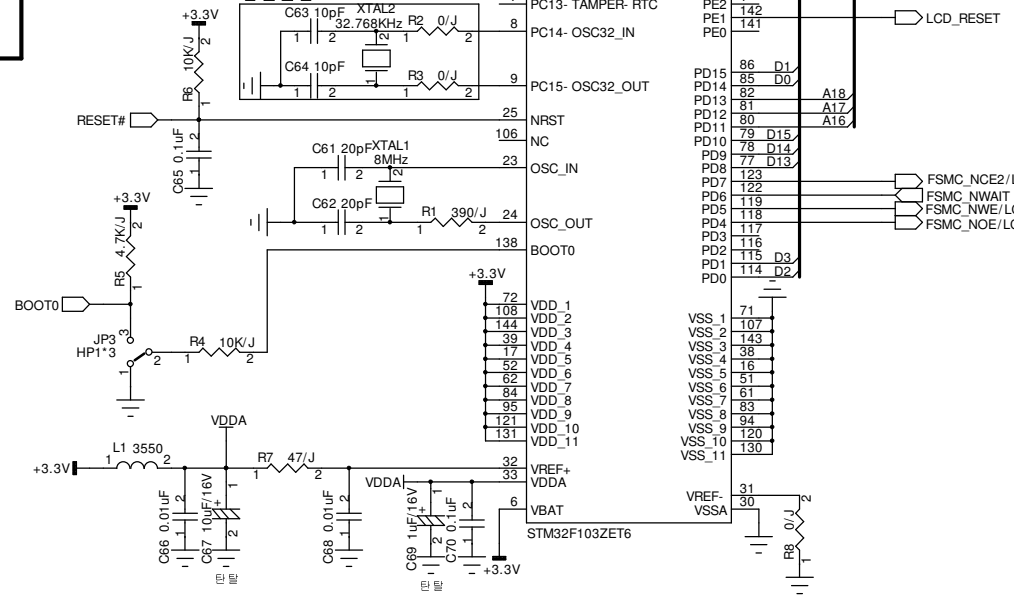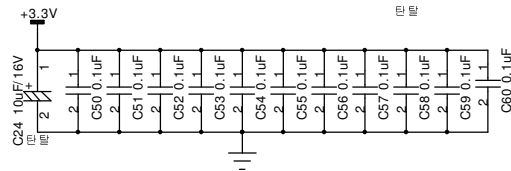


FILE NAME				NEW GPI- 8210 (CPU,DISPLAY,KEY,BUZZER)			
연구소공유\제품개발				Title GTECH- PMA- 8210 VER 0.1			
담당	팀장	연구조장	기술교련	Size A3	Document Number GPI- 8210- ET- 000- 00		Rev R0
				Date: 2014- 08- 05		Sheet 2 of 3	


NOR & NAND FLASH

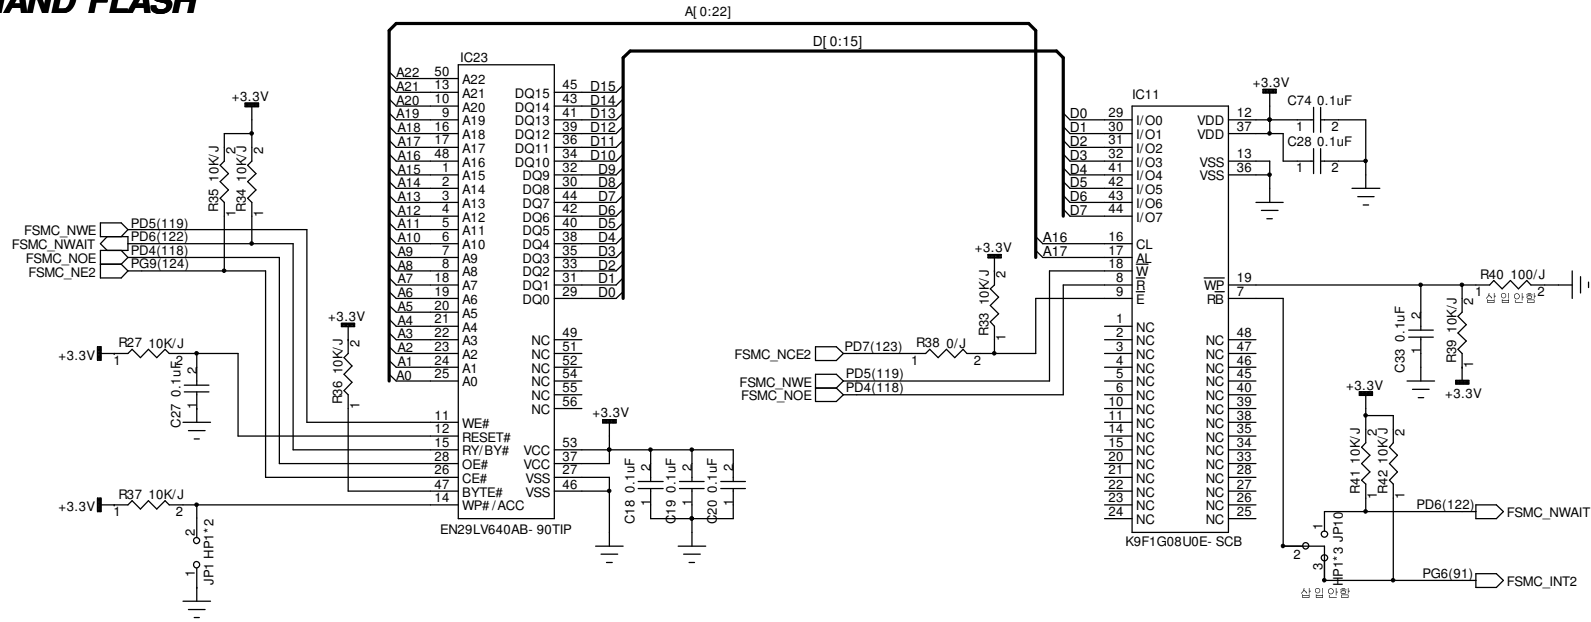

외부입력

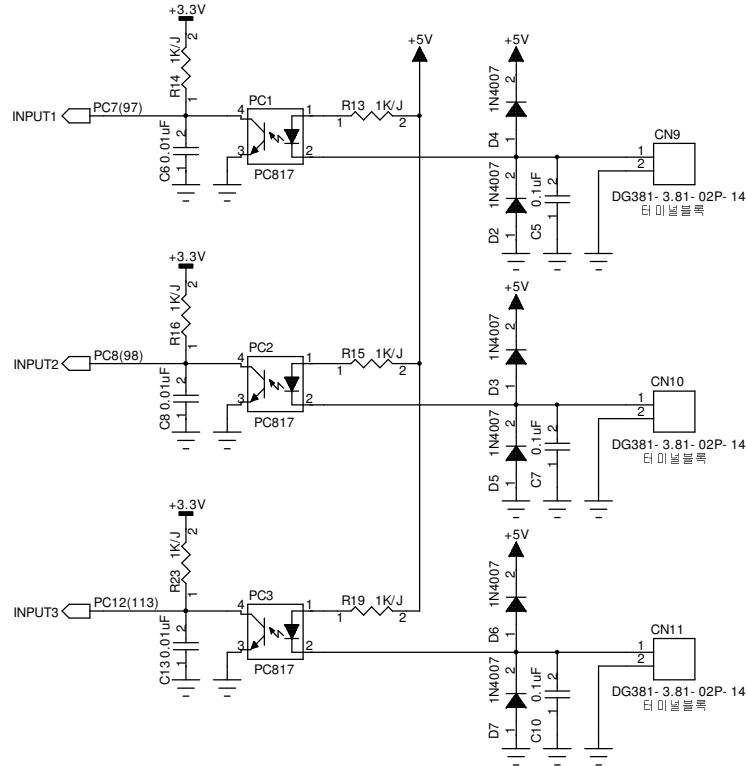

외부출력

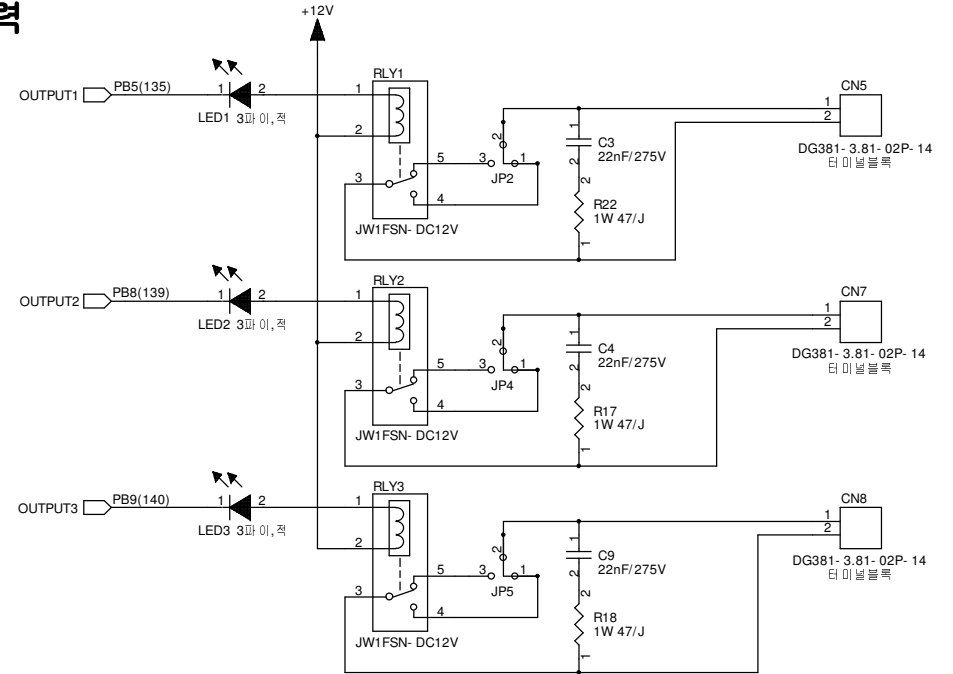

FILE NAME				NEW GPI- 8210 (MEMORY,INPUT,OUTPUT)			
연구소공유\ 제품개발				Title			
				GTECH- PMA- 8210 VER 0.1			
담당	팀장	연구소장	기술고문	Size	Document Number	GPI- 8210- ET- 000- 00	
				A3			Rev R0
Date: 2014- 08- 05				Sheet 3 of 3			