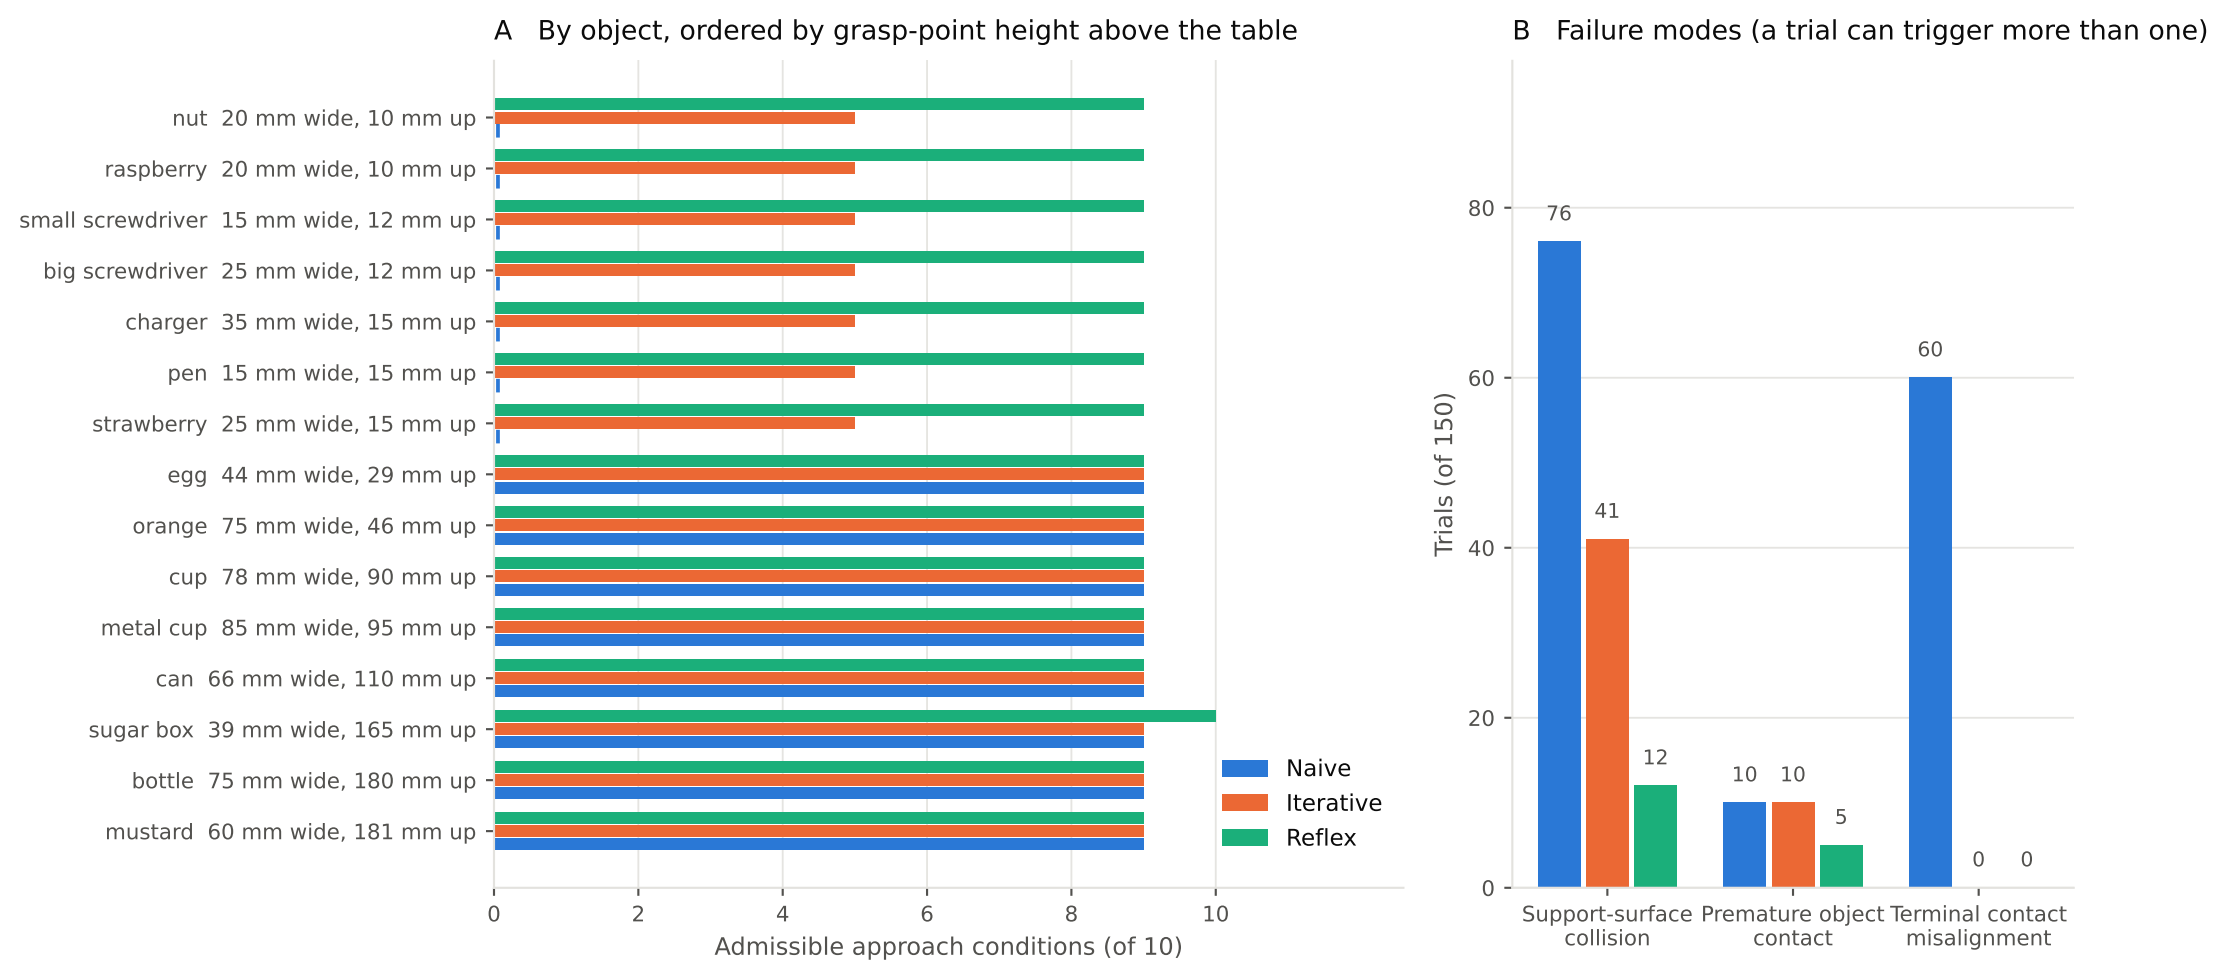
A By object, ordered by grasp-point height above the table
nut 20 mm wide, 10 mm up
raspberry 20 mm wide, 10 mm up
small screwdriver 15 mm wide, 12 mm up
big screwdriver 25 mm wide, 12 mm up
charger 35 mm wide, 15 mm up
pen 15 mm wide, 15 mm up
strawberry 25 mm wide, 15 mm up
egg 44 mm wide, 29 mm up
orange 75 mm wide, 46 mm up
cup 78 mm wide, 90 mm up
metal cup 85 mm wide, 95 mm up
can 66 mm wide, 110 mm up
sugar box 39 mm wide, 165 mm up
bottle 75 mm wide, 180 mm up
mustard 60 mm wide, 181 mm up
0
2
4
6
8
10
Admissible approach conditions (of 10)
Naive
Iterative
Reflex
B Failure modes (a trial can trigger more than one)
Trials (of 150)
0
20
40
60
80
76
41
12
10
10
5
60
0
0
Support-surface collision
Premature object contact
Terminal contact misalignment