



WORLDWIDE OILFIELD MACHINE

WOM Model 700 Plug Valve

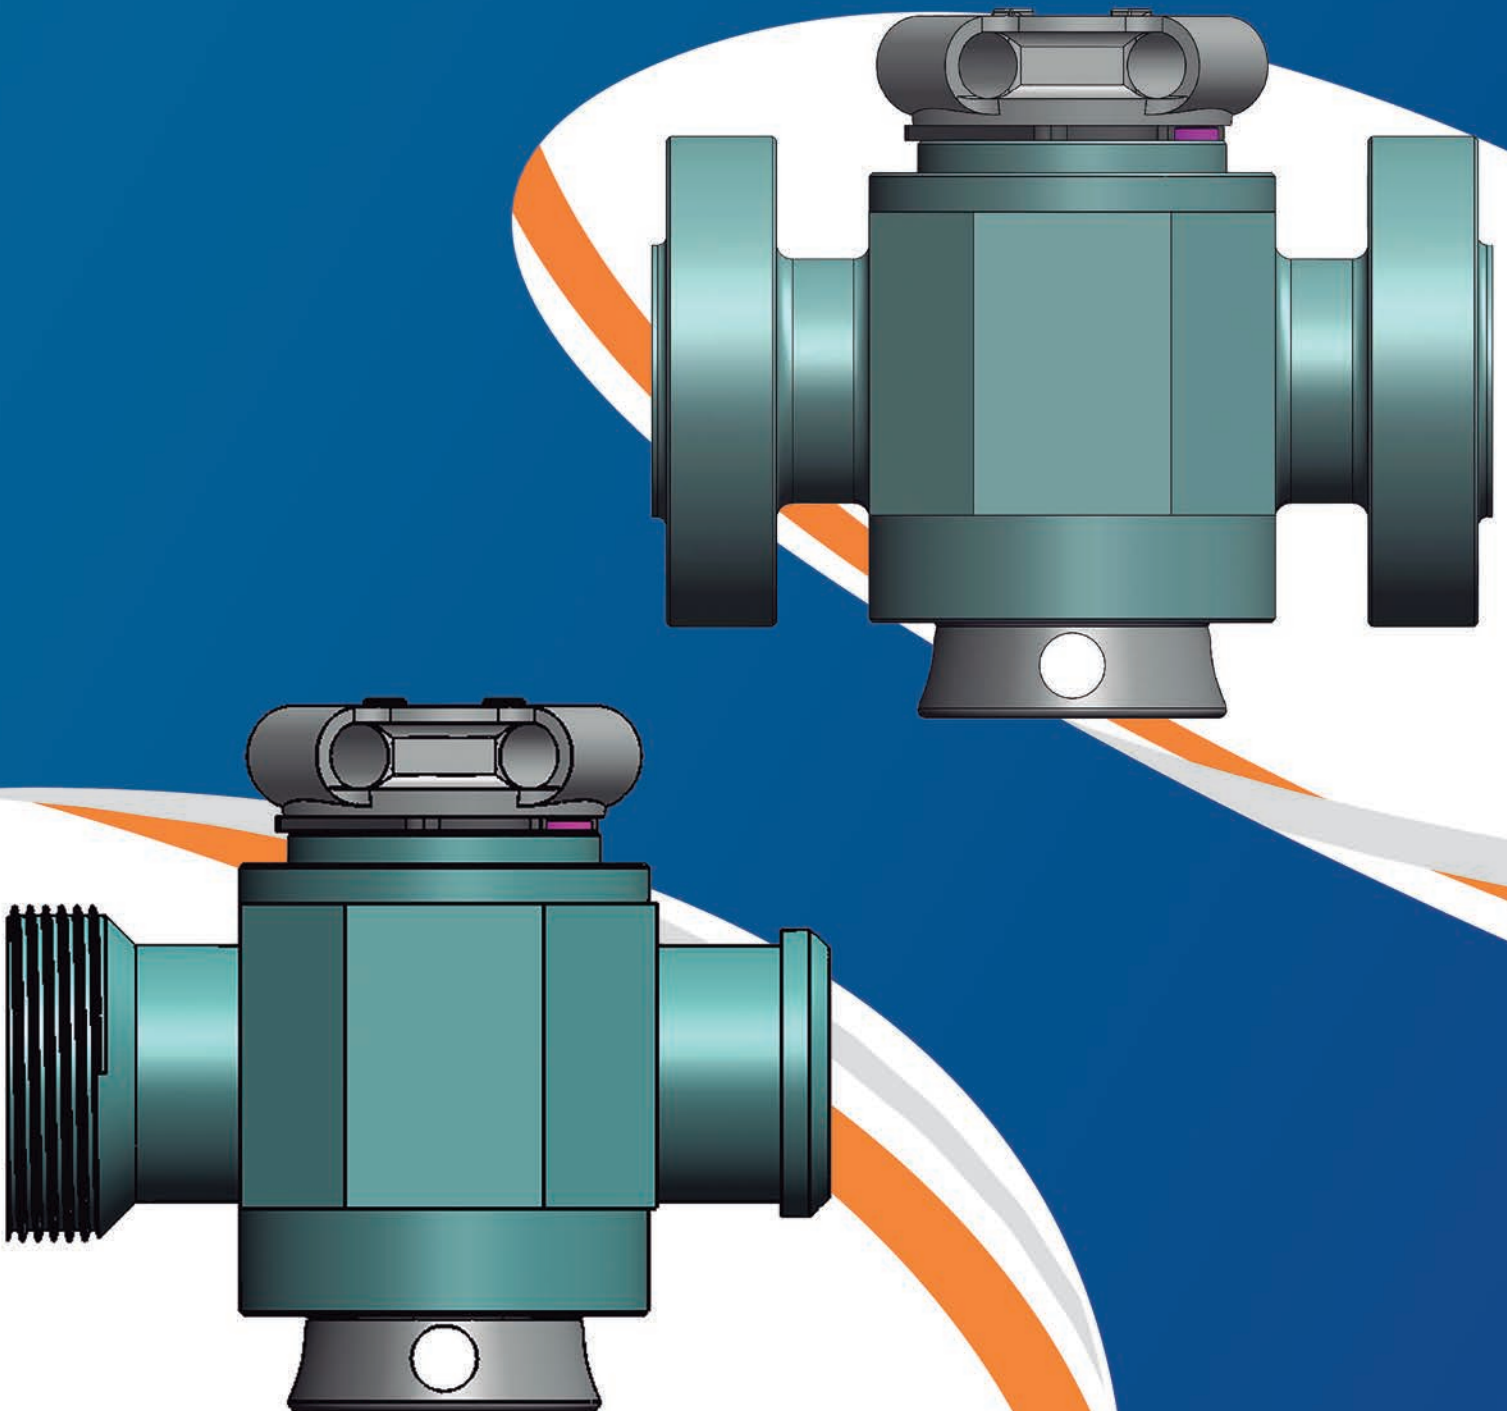


Table of Contents

Model 700 Plug Valve

Model 700 Plug Valve Key Design Feature	3
Model 700 Plug Valve Advantages	3
Model 700 Plug Valve Technical Specifications	3

Model 700 Plug Valve Components

Manually Operated Model 700 Plug Valve	4
Gear Operated Model 700 Plug Valve	5
Hydraulically Operated Model 700 Plug Valve	6

Model 700 Plug Valve Specifications

Size 1"	7
Size 2"	8
Size 3"	9
Size 4"	10

Model 700 Plug Valve Exploded Views

Manually Operated Model 700 Plug Valve	11
Gear Operated Model 700 Plug Valve	12
Hydraulically Operated Model 700 Plug Valve	13

Model 700 Plug Valve Greasing Procedure 14



The Model 700 Plug Valve is a tapered seal, lubricated, quarter-turn plug valve for rapid operation in both onshore and offshore applications designed to control the movement of fluid through the flow line. The body cavity is tapered to ensure uniform seating of the sealing inserts, providing a reliable seal at a full range of pressures. It is engineered to provide low operating torque and resistant to tough abrasive and corrosive conditions in drilling, production and pressure pumping applications.

End Connection Options:

WOM offers several end connection choices for the Model 700 that are field proven for reliability and performance. Connection types such as Hammer Unions, API Flanged, and Clamp Hub End are available. All sizes of WOM valves can be equipped with any choice of end connection or combination to suit specific applications, with working pressure ratings up to 15,000 psi.

Key Design features:

- Bi-directional sealing
- Low torque
- Floating (T-slot) Plug
- Soft Sealing


Advantages:

- Flow pressure helps in effective sealing
- T-slot boosts consistent sure seal
- Leak paths are reduced while adjusting nut is made blind
- Quarter-turn valves

Technical Specifications:


- Sizes: 1-13/16" to 4-1/16"
- Flanged / Hubbed / Hammer Union Ends
- Working pressure rating: 2,000 to 15,000 psi
- Temperature rating: -20° F to 350° F (P + X)
- Performance requirement: PR-2
- Complies to API Spec. 6A
- Product Specification Level: PSL-1 thru' PSL-3
- Complies to NACE -MR01-75
- Manual, Gear operated, and Hydraulic available.

Manually Operated Model 700 Plug Valve - Components

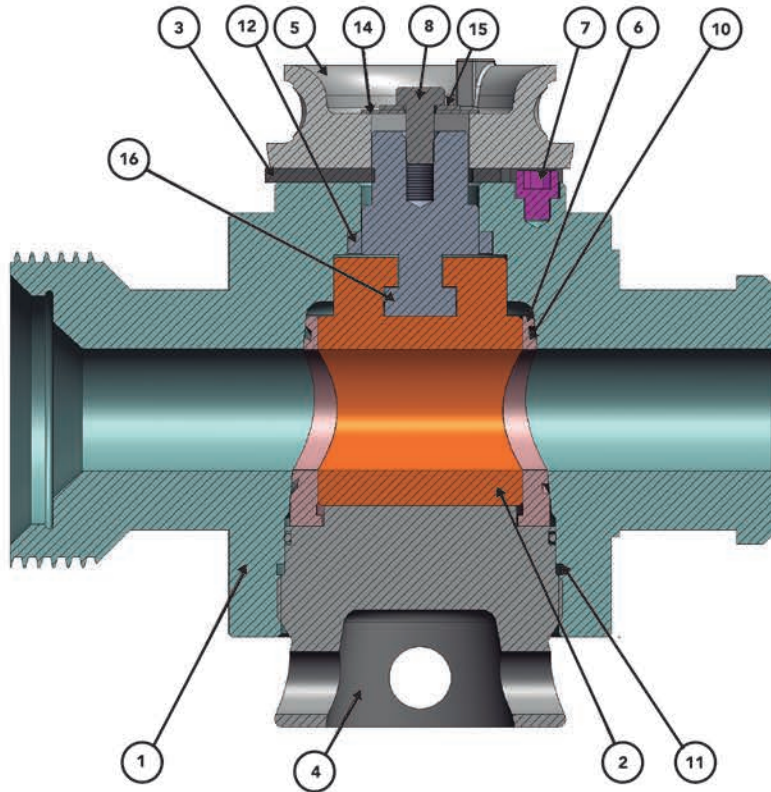


S/N	Description	Qty.
1	Valve Body	1
2	Plug	1
3	Stop Plate	1
4	Adjusting Nut	1
5	Handle Cap	1
6	Insert	2
7	Bolt Allen Head	1
8	Bolt Hex Head	1
9	Grease Fitting (Not Shown)	1
10	Seat Seal (O Ring)	2
11	Seal Adjusting Nut (O Ring)	1
12	Seal Stem	1
13	Roll Pins (Not Shown)	2
14	Big Washer	1
15	Small Washer	1
16	Stem	1
17	Name Plate (Not Shown)	1
18	Operating Rod (Not Shown)	1

Hydraulically Operated Model 700 Plug Valve – Components

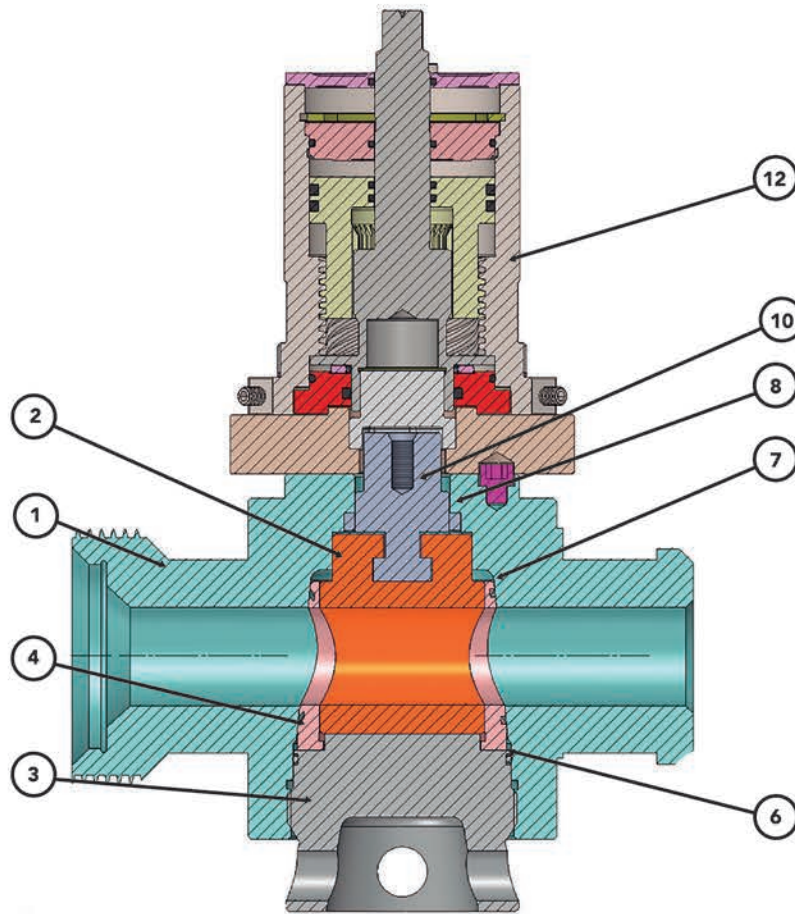


S/N	Description	Qty.
1	Valve Body	1
2	Plug	1
3	Adjusting Nut	1
4	Insert	1
5	Grease Fitting (Not Shown)	1
6	Seal Insert (O Ring)	2
7	Seal Adjusting Nut (O Ring)	1
8	Stem Seal	1
9	Roll Pins (Not Shown)	2
10	Stem	1
11	Name Plate (Not Shown)	1
12	Hydraulic Actuator Double Acting	1
13	Operating Rod (Not Shown)	1

Gear Operated Model 700 Plug Valve – Components

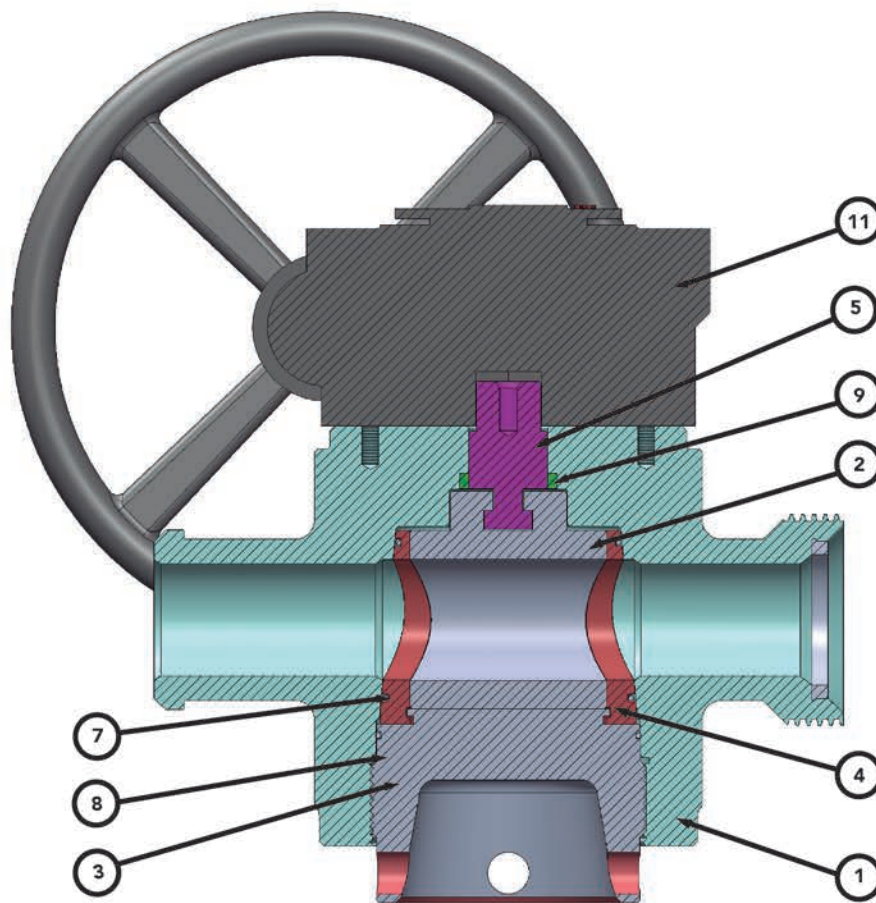


S/N	Description	Qty.
1	Valve Body	1
2	Plug	1
3	Adjusting Nut	1
4	Insert Set	1
5	Stem	1
6	Grease Fitting (Not Shown)	2
7	Seal Ring	1
8	Seal Adjusting Nut	1
9	Elastomer Seal	2
10	Roll Pins (Not Shown)	1
11	Gear Operator	1
12	Operating Rod (Not Shown)	1

1" Model 700 Plug Valve Specifications (up to 15,000 psi)

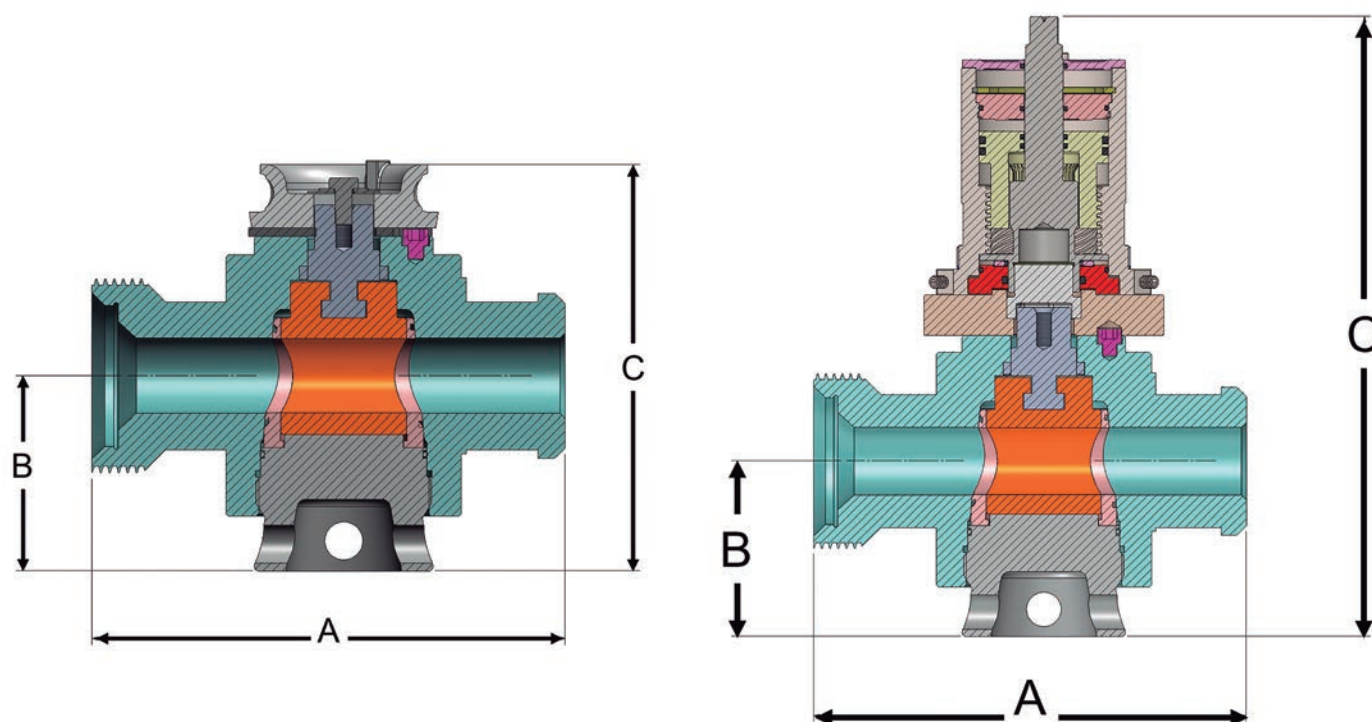


Connection Type	Actuation	Temperature	Service Type	Dim A (in)	Dim B (in)	Dim C (in)	Weight (LBS)
Hammer Union	Manual	(P+U) -20 to 250°F	Standard	13.88	5.41	10.64	90
Hammer Union	Manual	(P+U) -20 to 250°F	H2S	13.88	5.41	10.64	90
Hammer Union	Hydraulic	(P+U) -20 to 250°F	Standard	13.88	5.41	19.11	130
Hammer Union	Hydraulic	(P+U) -20 to 250°F	H2S	13.88	5.41	19.11	130

2" 700 Plug Valve Specifications (up to 15,000 psi)

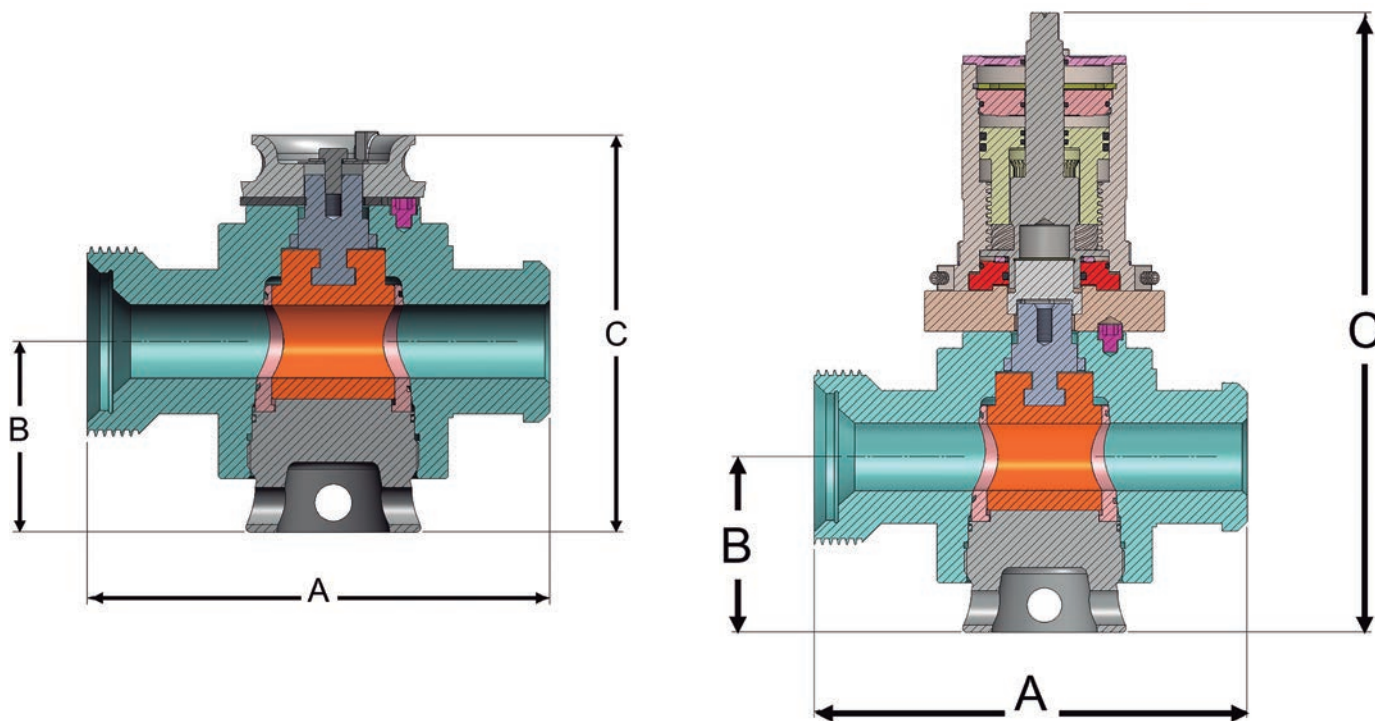


Connection Type	Actuation	Temperature	Service Type	Dim A (in)	Dim B (in)	Dim C (in)	Weight (LBS)
Hammer Union	Manual	(P+U) -20 to 250°F	Standard	13.88	5.41	10.64	80
Hammer Union	Manual	(P+U) -20 to 250°F	H2S	13.88	5.41	10.64	80
Hammer Union	Hydraulic	(P+U) -20 to 250°F	Standard	13.88	5.41	19.11	120
Hammer Union	Hydraulic	(P+U) -20 to 250°F	H2S	13.88	5.41	19.11	120

3" Model 700 Plug Valve Specifications (up to 15,000 psi)

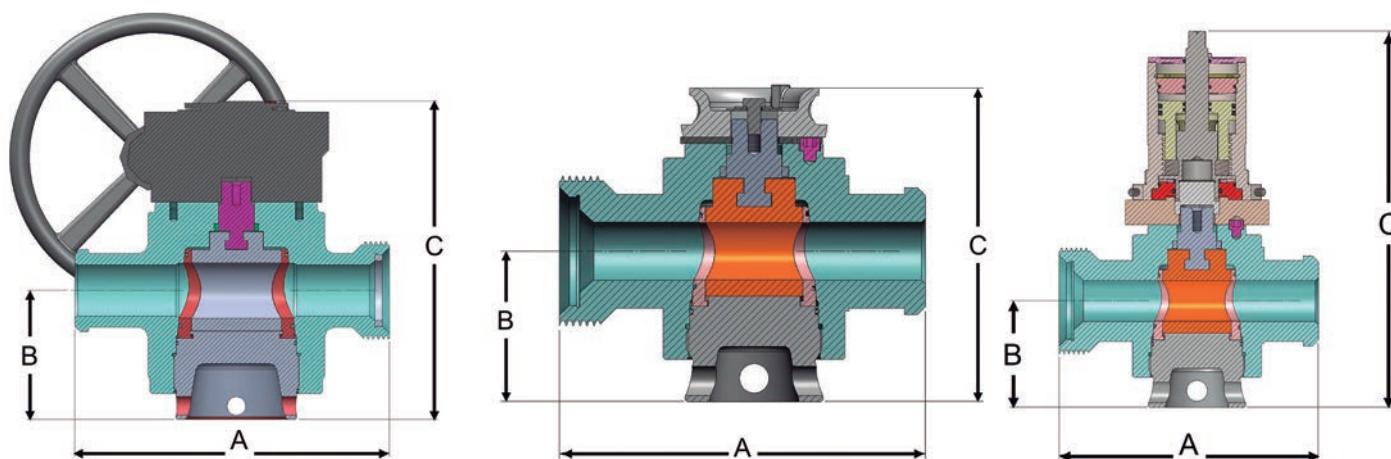


Connection Type	Actuation	Temperature	Service Type	Dim A (in)	Dim B (in)	Dim C (in)	Weight (LBS)
Hammer Union	Manual	(P+U) -20 to 250°F	Standard	17.52	7.18	12.94	140
Hammer Union	Manual	(P+U) -20 to 250°F	H2S	17.52	7.18	12.94	140
Hammer Union	Gear Operator	(P+U) -20 to 250°F	Standard	17.52	7.18	21.33	250
Hammer Union	Gear Operator	(P+U) -20 to 250°F	H2S	17.52	7.18	21.33	250
Hammer Union	Hydraulic	(P+U) -20 to 250°F	Standard	17.52	7.18	16.00	240
Hammer Union	Hydraulic	(P+U) -20 to 250°F	H2S	17.52	7.18	16.00	240

4" Model 700 Plug Valve Specifications (up to 15,000 psi)

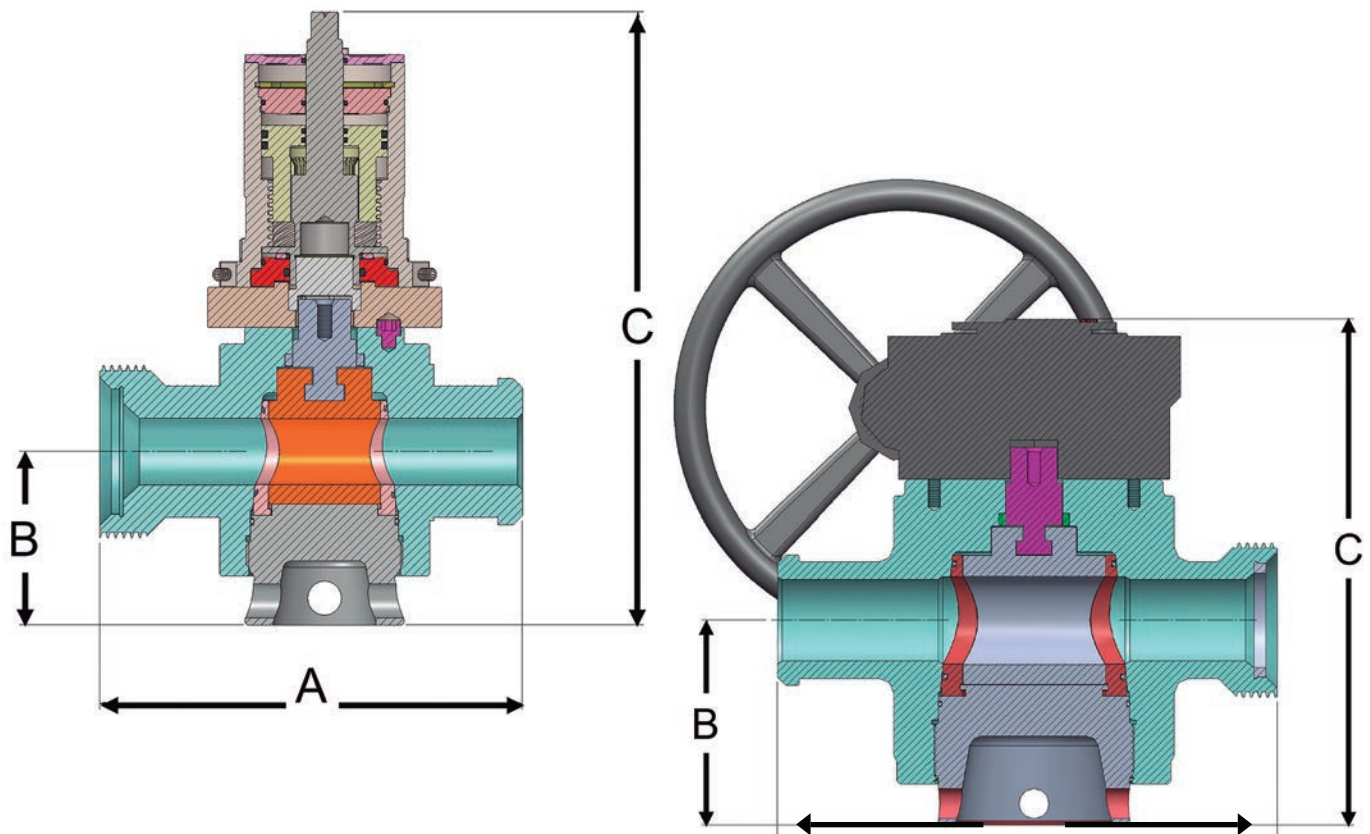


Connection Type	Actuation	Temperature	Service Type	Dim A (in)	Dim B (in)	Dim C (in)	Weight (LBS)
Hammer Union	Gear Operator	(P+U) -20 to 250°F	Standard	17.52	8.62	27.73	380
Hammer Union	Gear Operator	(P+U) -20 to 250°F	H2S	17.52	8.62	27.73	380
Hammer Union	Hydraulic	(P+U) -20 to 250°F	Standard	17.52	8.62	20.80	460
Hammer Union	Hydraulic	(P+U) -20 to 250°F	H2S	17.52	8.62	20.80	460


Manually Operated Model 700 Plug Valve

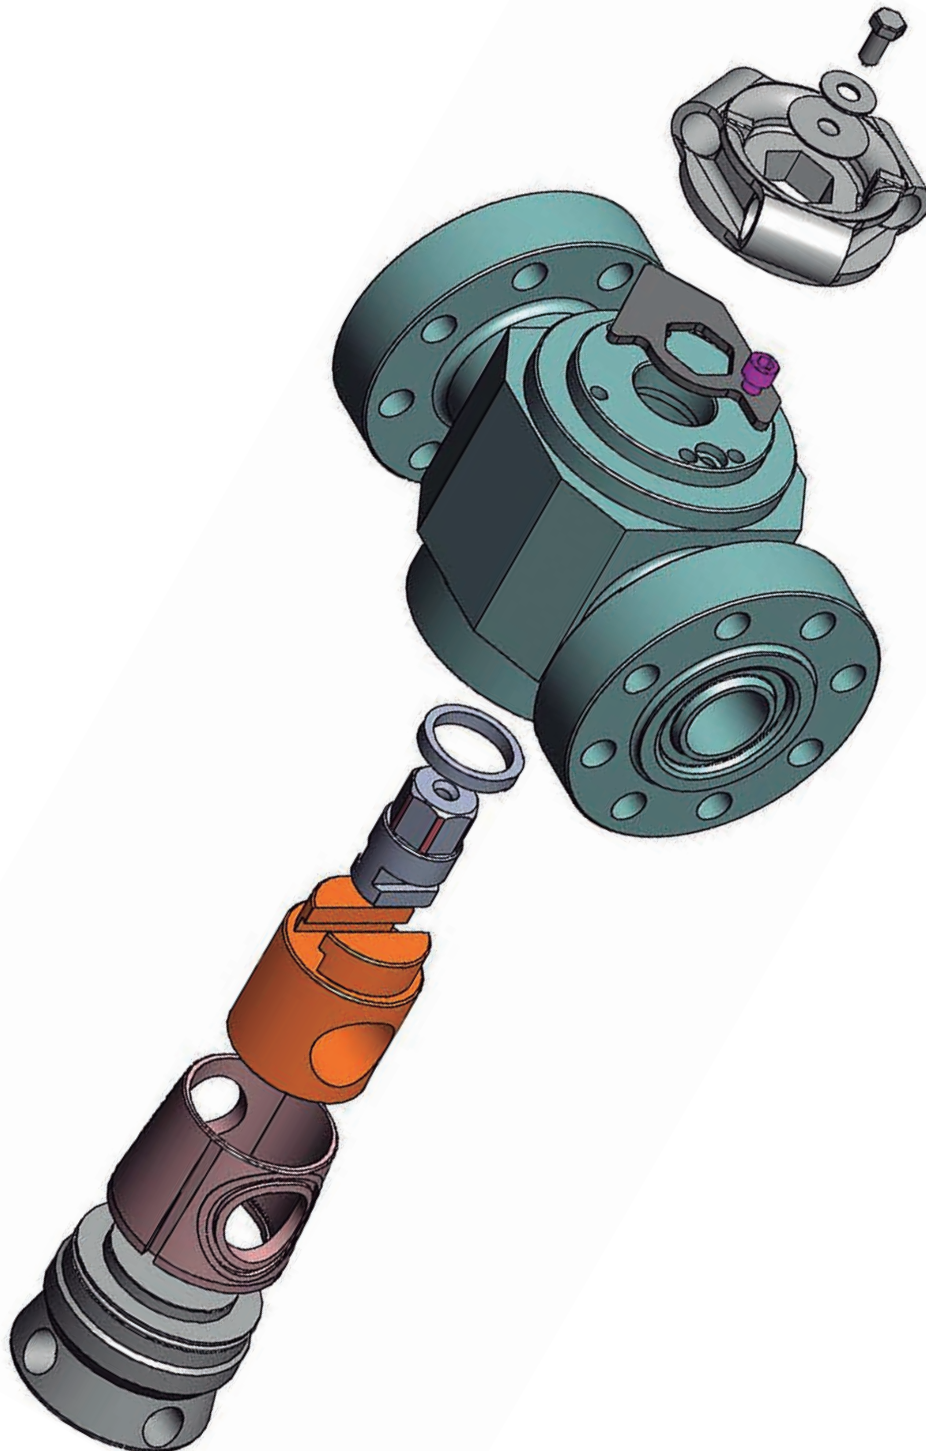

Hydraulically Operated Model 700 Plug Valve

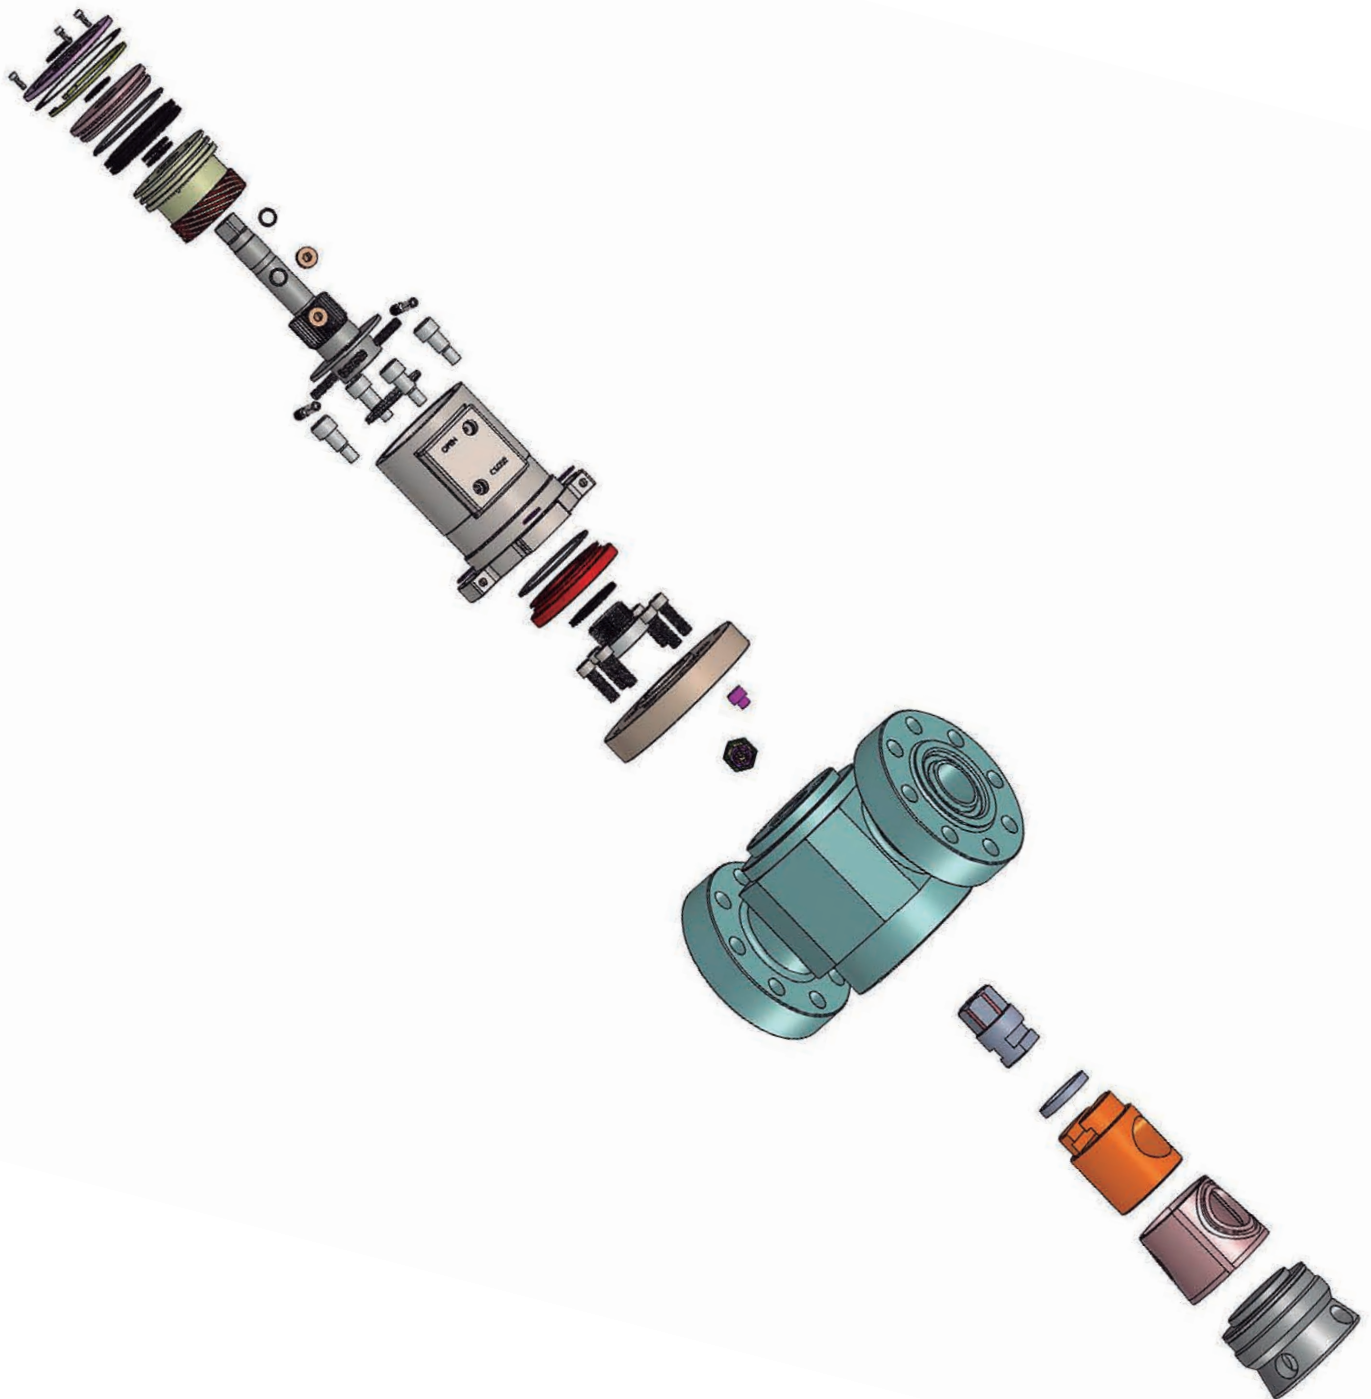

Gear Operated Model 700 Plug Valve

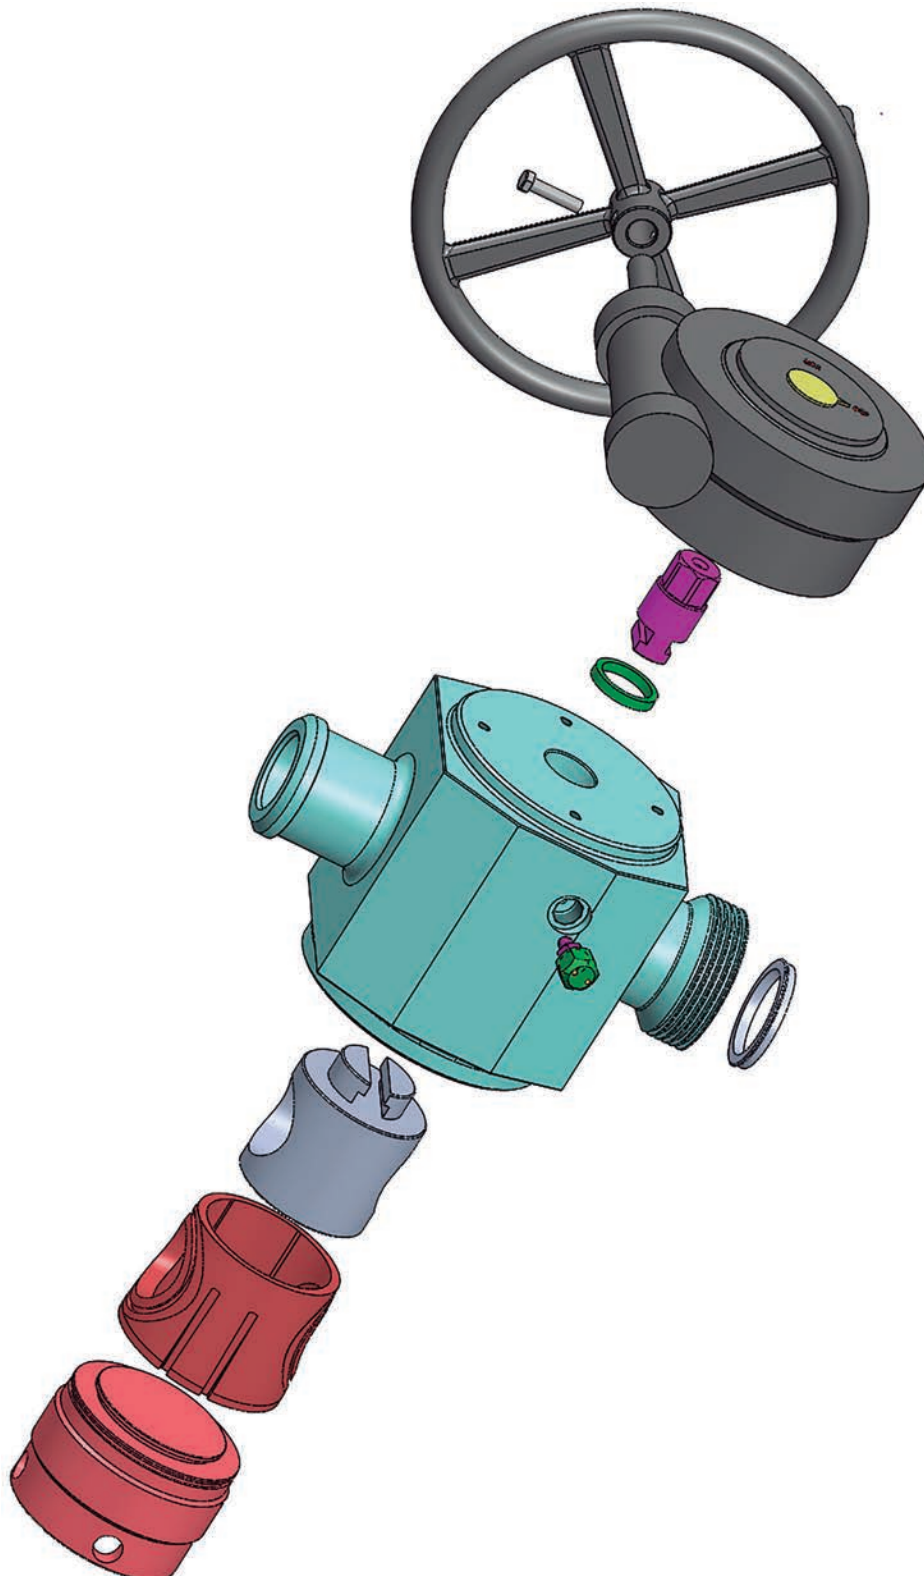

Model 700 Plug Valve Greasing

WOM's Model 700 Plug Valve is designed to operate under severe applications. It is recommended to grease the valve periodically in order to prolong the life the of the valve.

Greasing Procedure:

1. Flush the valve to remove contaminated grease and sediment.
2. Keep the valve in the open position
3. Pump the WOM recommended grease* through the grease port
4. Cycle the valve from open to close

***Recommended Greases:**

Description	Vendor
Everlast #3 Arctic Grade	Lubchem
#700 CO2 / Hi-Temperature / Condensate (Size J)	Val-Tex
#302 CO2 / Hi-Temperature (Size K)	Val-Tex
#972 General Service (Size K)	Val-Tex
Low Temperature (Size K)	Val-Tex



Contact Us



Worldwide Oilfield Machine, Inc. Headquarters/ U.S.A

11809 Canemont Street
Houston, Texas 77035 USA
Phone: +1 (713) 729-9200
Fax: +1 (713) 729-7321



Worldwide Oilfield Machine, Inc.

5800 Cunningham
Houston, Texas 77041 USA
Phone: +1 (713) 937-0795
Fax: +1 (713) 937-8574



Worldwide Oilfield Machine, Inc.

11625 Fairmont St.
Houston, Texas 77035 USA
Phone: +1 (713) 721-5200
Fax: +1 (713) 721-5205



Worldwide Oilfield Machine, Inc.

11400 Tanner Rd.
Houston, Texas 77041 USA
Phone: +1 (713)-937-8323
Fax: +1 (713) 937-8574



Worldwide Oilfield Machine Ltd. - UK

7 St Machar Road
Aberdeen
AB24 2UU
Scotland, UK
Phone: +44 (01224) 484400
Fax: +44 (01224) 489740



Worldwide Oilfield Machine Pvt. Ltd - India

Gat No. 778, at Post Velu
Pune Satara Rd.
Tal. Bhore, Dist. Pune 412 205. India
Phone 1: +91-8308210300
Phone 2: +91-8308215300



Magna Casting & Machine Works

Gat No. 777, at Post Velu
Pune Satara Rd.
Tal. Bhore, Dist. Pune 412 205. India
Phone 1: +91-8308210300
Phone 2: +91-8308215300



Magnum Forge & Machine Works

Gat No. 777, at Post Velu
Pune Satara Rd.
Tal. Bhore, Dist. Pune 412 205. India
Phone 1: +91-8308210300
Phone 2: +91-8308215300



Worldwide Oilfield Machine, Inc.- Turkmenistan

Yimpash Business Centre
Turkmenbashi Shayoly 54
Office #308 3rd Floor
Ashgabat -Turkmenistan 744000
Phone 1: +99-365 820130
Phone 2: +99-365 309757



Worldwide Oilfield Machine, M.E. - U.A.E

Jebel Ali Free Zone (JAFZA) South,
Plot# S61302, Near Gate#12,
P.O. Box: 32478
Dubai (UAE)
Phone: (971-4) 81 63 600
Fax: (971-4) 81 63 601



Magnum Technology Center

Jebel Ali Free Zone (JAFZA) South,
Plot# S61302, Near Gate#12,
P.O. Box: 32478
Dubai (UAE)
Phone: (971-4) 810 8600
Fax: (971-4) 810 8601



PT Worldwide Oilfield Machine - Indonesia

#11-08 One Pacific Place
Sudirman Central Business District
Jl. Jenderal Sudirman Kav. 52-53,
Jakarta 12190
Phone: + 1-832-372-0674



Worldwide Oilfield Machine Asia Pacific-Singapore

17 Gul Way
Singapore 629194
Phone: +(65) 66901700
Fax: +(65) 65603859



Worldwide Oilfield Machine- Korea

#1012, 481-10, Byucksan Digital Vally-II,
Gasandong, GumchonGu
Seoul, Korea 153-803
Phone: +82-2-854-6806



**Worldwide
Oilfield
Machine
Est. 1980**

©2011 Worldwide Oilfield Machine, Inc. www.womusa.com

Disclaimer. This catalog is published for informational purposes only. All previous catalogs are not valid and should not be used as a reference in any form.
Rev. 2017