

Worldwide Oilfield Machine


Well Test Products



Invention,
Unique Design &
Extraordinary
Craftsmanship

Subsea Intervention Systems
Custom Design & Manufacture
Wellheads & Christmas Trees
Magnum Gate Valves
Blow Out Preventers
Manifold Systems
Ball Valves
Well Test Products



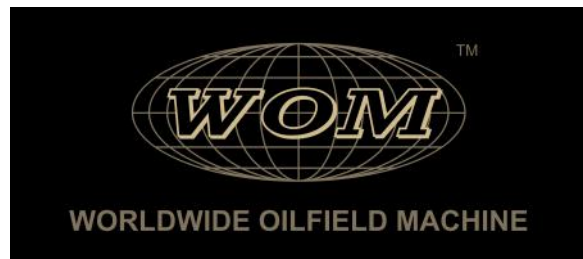

WOM proudly celebrates 39 years of providing the oil & gas industry with meticulously designed, well-engineered pressure and flow control equipment. WOM looks forward to continuing to make a positive impact on the process of safely extracting one of the world's most precious resources. We are honored to work with the businesses that have trusted our commitment to excellence and appreciate each member of our group that has contributed to our success.

Well Test Products

WOM has over the years gained considerable knowledge and experience in the design and manufacture of Well Test Products. These products include Solid Block Flowhead Systems, Modular Flowheads, Magnum Gate Valves, Surface Safety Valves, Wireline Cutting Gate Valves, Chokes, and Choke Manifolds.

SOLID BLOCK FLOWHEAD SYSTEMS

The WOM Flowhead is a solid block surface control head designed for use in well testing, perforating, and wireline operations.

MODULAR FLOWHEADS

The WOM Modular Flowhead is a light weight surface control head designed for use in testing, perforating, and wireline operations.

MAGNUM GATE VALVES

WOM's Magnum Gate Valves are the industry's most reliable bi-directional gate valves for well control during drilling, testing, and production operations. Magnum Gate Valves' unique "Dual-Seal" system provide both upstream and downstream sealing, creating a pressure energized balanced between the slab gate and seat assemblies.

SURFACE SAFETY VALVES

The WOM Surface Safety Valve (SSV) is a hydraulically actuated, fail-safe close gate valve for use in well testing, perforating, and wireline operations.

WIRELINE CUTTING GATE VALVES

The WOM Wireline Cutting Gate Valve is a hydraulically actuated, solid block gate valve designed for use when performing wireline operations on offshore platforms.

CHOKES

WOM provides chokes (adjustable and positive) with pressure ratings ranging from 5,000 psi to 20,000 psi.

CHOKE MANIFOLDS


WOM specializes in the design and manufacture of manifold systems for use in well test operations with pressure ratings up to 20,000 psi.



WORLDWIDE OILFIELD MACHINE




Flowhead

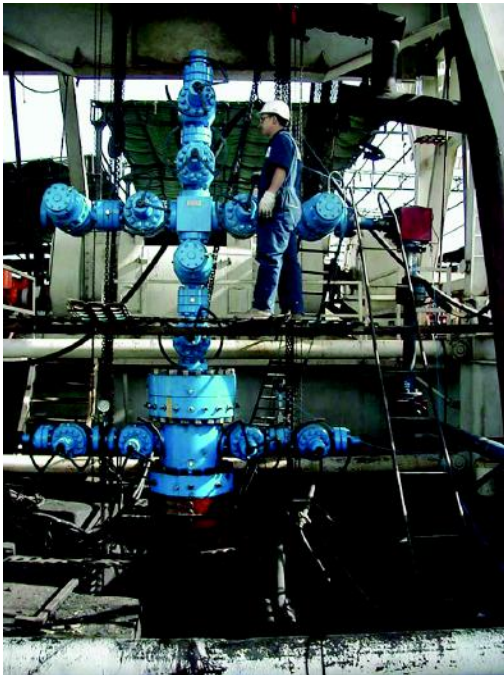

Wellhead/Xmas Tree in service



Wireline Cutting Valve

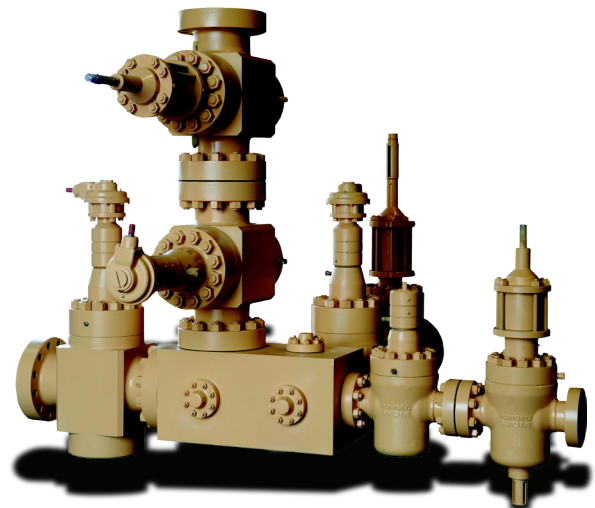

Choke Manifold

SURFACE SAFETY VALVE

The WOM Surface Safety Valve (SSV) can be provided with either a manually operated hydraulic pump, or with the more commonly used, hydraulic control unit with Emergency Shut Down (ESD) system. The ESD system is designed to be connected to the platform’s air supply system which acts as a triggering mechanism for the SSV. In the event that rig air pressure is lost the ESD system will sound an alarm and release hydraulic “Open” line pressure on the SSV. The fail-safe close feature of the SSV will then close the valve. The SSV is skid mounted and enclosed in a protection frame in order to prevent damage while in use offshore. The SSV can be provided with a variety of connections including hammer lug unions, Graylock, API 16A hub, or API 6A flanges.

WIRELINE CUTTING VALVE

The WOM Wireline Cutting Valve is a fail-safe close gate valve specially designed for use offshore and is housed in a rotatable protection frame which is small enough to be lowered through the access hatch for connection to the production tree. The Wireline Cutting Valve is capable of cutting braided line or slick line up to 7/32” in. diameter and provides a single point cut helping to ensure a reliable seal after cutting. The Wireline Cutting Valve is provided with quick unions as standard connectors but can be provided with a variety of different connections including hammer lug unions, Graylock and API flanges.

CHOKES

WOM provides Positive and Adjustable Chokes with pressure ratings ranging from 5,000 to 20,000 psi, with inlet and outlet flanges from 2-1/16” to 5-1/8”.


CHOKE MANIFOLDS

All WOM manifold systems incorporate WOM Magnum Gate Valves and chokes which provide proven reliability. WOM offers a five valve rectangular pattern and a four valve diamond pattern for limited space on offshore rigs.

The five valve rectangular choke manifold features five Magnum Gate Valves, an adjustable choke, a positive choke, and a flow-through bypass line. This configuration is ideal for surface pressure control during drill stem testing. For use in confined surroundings, the four valve diamond manifold is available with four Magnum Gate Valves, and adjustable choke, and a positive choke. In addition to these standard systems, WOM custom designs and builds manifolds for virtually any application and to any client specification, including a Surface Safety Valve (SSV) at the flow line inlet.

SSV	PRESSURE RATING (psi)

Available SSV and Wireline Cutting Valve sizes and working pressures:

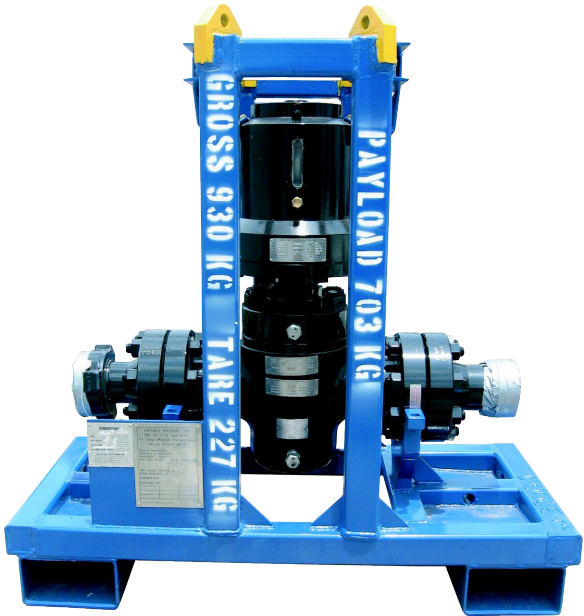

Wireline Cutting Valve

SOLID BLOCK FLOWHEAD SYSTEMS

The tool is composed of a solid block valve body, an upper swabbing valve, a kill line valve, and a hydraulically actuated flow line valve. Attached below the main valve block is a high axial thrust tubing swivel that allows rotation of the tool string during operations and while under pressure. The lower master valve is a WOM Magnum Gate Valve which provides a double shut-in barrier and isolates the tubing swivel.

Additionally, the WOM Flowhead has been designed with the choke and kill line outlets at a downward angle in order to satisfy minimum space requirements. These outlets can be provided with connections of your choice and elbows which allow the connected flowlines to hang downward rather than straight out to the sides as is common in other flowheads.

A specially designed removable crash frame is included which provides protection for the valves and actuators used in the main valve block.


The WOM Flowhead also incorporates proven metal-to-metal sealing technology throughout its' design and all valves are single piece slab gate valves with hard faced surfaces to insure reliability during use in harsh environment operations.

MODULAR FLOWHEAD

The tool comprises an upper and lower section which are coupled together by a load bearing quick union for easy assembly and disassembly. The upper section of the Modular Flowhead consists of a handling sub with quick union coupler, an upper swab valve, and a remote safety valve. The upper swab valve is a manually operated solid block Magnum gate valve. The remote safety valve is a hydraulically actuated, fail-safe sleeve valve with hammer lug union outlets for the attachment of the choke and kill lines.

The lower section of the Modular Flowhead consists of a tubing swivel, a lower master valve, and a saver sub. The tubing swivel is provided for string rotation without the need for rotation of the Flowhead. The lower master valve is a manually operated, solid block Magnum gate valve.

WOM Flowheads can be supplied with any connection types and are manufactured, assembled, and tested as a complete field unit shipped ready for field use. WOM Flowheads can be provided with the following optional features and equipment:

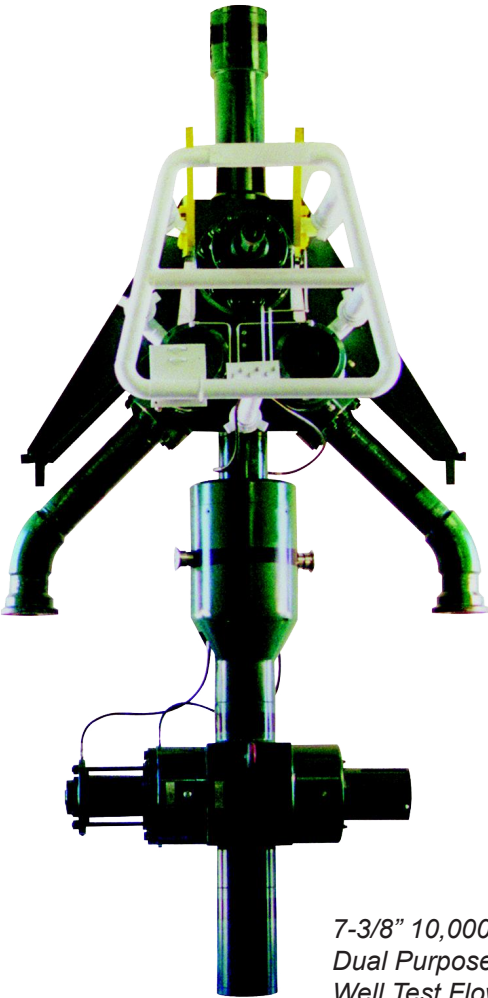

7-3/8" 10,000 psi
Dual Purpose
Well Test Flowhead

Flowhead Size	PRESSURE RATING (psi)

Available Solid Block Flowhead sizes
and working pressures:

Flowhead Size	PRESSURE RATING (psi)

Contact Us



Worldwide Oilfield Machine, Inc.
Headquarters/ U.S.A
11809 Canemont Street
Houston, Texas 77035 USA
Phone: +1 (713) 729-9200
Fax: +1 (713) 729-7321



Worldwide Oilfield Machine, Inc.
5800 Cunningham
Houston, Texas 77041 USA
Phone: +1 (713) 937-0795
Fax: +1 (713) 937-8574



Worldwide Oilfield Machine, Inc.
11625 Fairmont St.
Houston, Texas 77035 USA
Phone: +1 (713) 721-5200
Fax: +1 (713) 721-5205



Worldwide Oilfield Machine, Inc.
11400 Tanner Rd.
Houston, Texas 77041 USA
Phone: +1 (713)-937-8323
Fax: +1 (713) 937-8574



Worldwide Oilfield Machine, Inc.
4707 SCR 1210
Midland, Texas 79706 – 305349
Phone: +1 (832) 908-4154



Worldwide Oilfield Machine Ltd. - UK
7 St Machar Road
Aberdeen
AB24 2UU
Scotland, UK
Phone: +44 (01224) 484400
Fax: +44 (01224) 489740



Worldwide Oilfield Machine Pvt. Ltd - India
Gat No. 778, at Post Velu
Pune Satara Rd.
Tal. Bhor, Dist. Pune 412 205. India
Phone 1: +91-8308210300
Phone 2: +91-8308215300



Magna Casting & Machine Works
Gat No. 777, at Post Velu
Pune Satara Rd.
Tal. Bhor, Dist. Pune 412 205. India
Phone 1: +91-8308210300
Phone 2: +91-8308215300



Magnum Forge & Machine Works
Gat No. 777, at Post Velu
Pune Satara Rd.
Tal. Bhor, Dist. Pune 412 205. India
Phone 1: +91-8308210300
Phone 2: +91-8308215300



Worldwide Oilfield Machine, Inc.- Turkmenistan
Yimpash Business Centre
Turkmenbashi Shayoly 54
Office #308 3rd Floor
Ashgabat –Turkmenistan 744000
Phone 1: +99-365 820130
Phone 2: +99-365 309757



WOM Brazil LTDA
Rua Lady Esteves da Conceição 119
Macaé, RJ, 27933-420, BRAZIL
Phone: +55 22 3081-3500



Worldwide Oilfield Machine, M.E. - U.A.E
Jebel Ali Free Zone (JAFZA) South,
Plot# S61302, Near Gate#12,
P.O. Box: 32478
Dubai (UAE)
Phone: (971-4) 81 63 600
Fax: (971-4) 81 63 601



Magnum Technology Center
Jebel Ali Free Zone (JAFZA) South,
Plot# S61302, Near Gate#12,
P.O. Box: 32478
Dubai (UAE)
Phone: (971-4) 810 8600
Fax: (971-4) 810 8601



PT Worldwide Oilfield Machine - Indonesia
#11-08 One Pacific Place
Sudirman Central Business District
Jl. Jenderal Sudirman Kav. 52-53,
Jakarta 12190
Phone: + 1-832-372-0674



Worldwide Oilfield Machine Asia Pacific-Singapore
17 Gul Way
Singapore 629194
Phone: +(65) 66901700
Fax: +(65) 65603859



Worldwide Oilfield Machine- Korea
#1012, 481-10, Byucksan Digital Vally-II,
Gasandong, GumchonGu
Seoul, Korea 153-803
Phone: +82-2-854-6806



©2011 Worldwide Oilfield Machine, Inc. www.womusa.com

Disclaimer. This catalog is published for informational purposes only. All previous catalogs are not valid and should not be used as a reference in any form.
Rev. 2019