

Flow Control Products

LEADING
THROUGH
INNOVATION

www.womgroup.com



WORLDWIDE OILFIELD MACHINE

TABLE OF **CONTENTS**



WOM Corporate Overview 4

Valves

 Plug Valves..... 5

 WFB..... 5

 Choke..... 5

Flowback Choke 9

Flowline Equipment 10

 Hammer Unions..... 12

 Pup Joints..... 13

 Hose Loops 13

 Swivel Joints..... 14

 Integral Connections 19

Manifolds..... 22

Introduction

Worldwide Oilfield Machine, Inc. (WOM) is a multinational manufacturer of pressure and flow control equipment with worldwide headquarters in Houston, Texas, and manufacturing, sales and service facilities strategically located throughout the world. Since the company's founding, WOM has applied innovative concepts and engineering excellence to consistently improve reliability and reduce maintenance of process pressure and flow control equipment. In 1985, WOM introduced the breakthrough Magnum Dual-Seal design for high pressure gate valves used in the oil and gas industry. After thorough and rigorous testing at WOM and independent test facilities, the Magnum Gate Valve design proved its superiority and became the gold standard in the industry for high-reliability, low maintenance valve technology. WOM continues to expand its product portfolio, manufacturing capabilities and customer service/support centers to offer customers a single source for world-class pressure and flow control package solutions.

An aggressive product development program has lead to oil and gas, petrochemical and power companies worldwide depending on WOM equipment to support their operations while protecting their employees and the environment. All WOM products meet ISO and API performance and are engineered to surpass quality requirements. Complete vertical integration, combined with a well-managed supply chain, ensures that customers receive orders according to their schedule.

HOUSTON, USA • ABERDEEN, UK • PUNE, INDIA • DUBAI, UAE • SINGAPORE • MIDLAND



Plug Valves

The Model 700 Plug Valve is a tapered seal, lubricated, quarter-turn plug valve for rapid operation in both onshore and offshore applications designed to control the movement of fluid through the flow line.

The body cavity is tapered to ensure uniform seating of the sealing inserts, providing a reliable seal at a full range of pressures. It is engineered to provide low operating torque and resistant to tough abrasive and corrosive conditions in drilling, production and pressure pumping applications.

End Connection Options:

WOM offers several end connection choices for the Model 700 that are field proven for reliability and performance. Connection types such as Hammer Unions, API Flanged, and Clamp Hub End are available. All sizes of WOM valves can be equipped with any choice of end connection or combination to suit specific applications, with working pressure ratings up to 15,000 psi.

Key Design features:

- Bi-directional sealing
- Low torque
- Floating (T-slot) Plug
- Soft Sealing

Advantages:

- Flow pressure helps in effective sealing
- T-slot boosts consistent sure seal
- Leak paths are reduced while adjusting nut is made blind
- Quarter-turn valves


Technical Specifications:

- Sizes: 1-13/16" to 4-1/16"
- Flanged / Hub / Hammer Union Ends
- Working pressure rating: 2,000 to 15,000 psi
- Temperature rating: -20° F to 350° F (P + X)
- Performance requirement: PR-2
- Complies to API Spec. 6A
- Product Specification Level: PSL-1 thru' PSL-3
- Complies to NACE -MR01-75
- Manual, Gear operated, and Hydraulic available.



Plug Valves


1" Model 700 Plug Valve Specifications (up to 15,000 psi)

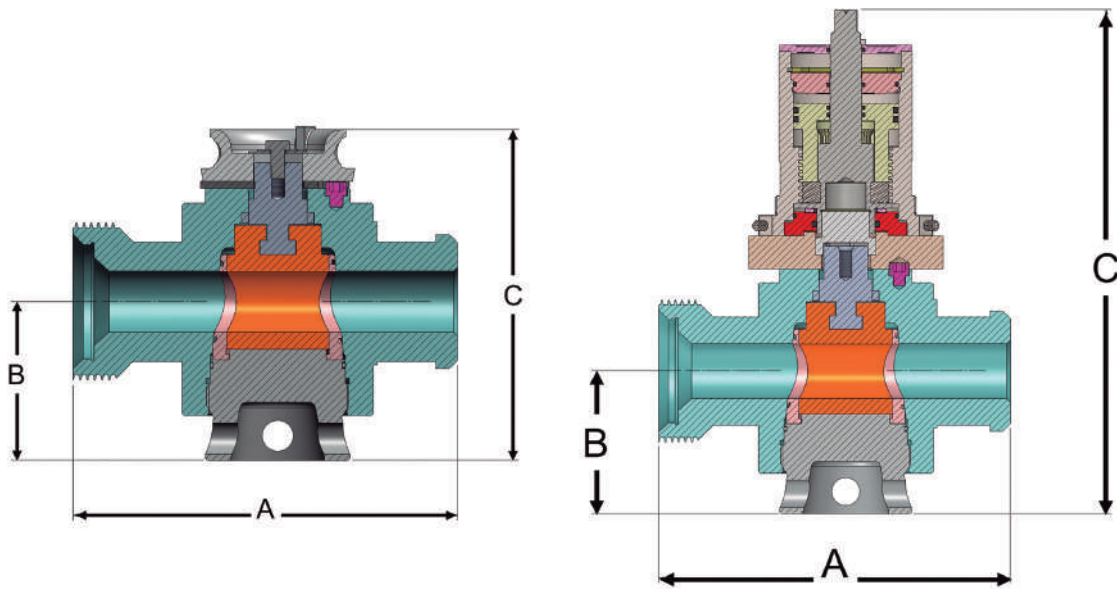

Connection Type	Actuation	Temperature	Service Type	Dim. A (in)	Dim. B (in)	Dim. C (in)	Weight (LBS)
Hammer Union	Manual	(P+U) -20 to 250 °F	Standard	13.88	5.41	10.64	90
Hammer Union	Manual	(P+U) -20 to 250 °F	H2S	13.88	5.41	10.64	90
Hammer Union	Hydraulic	(P+U) -20 to 250 °F	Standard	13.88	5.41	19.11	130
Hammer Union	Hydraulic	(P+U) -20 to 250 °F	H2S	13.88	5.41	19.11	130

Plug Valves


2" Model 700 Plug Valve Specifications (up to 15,000 psi)

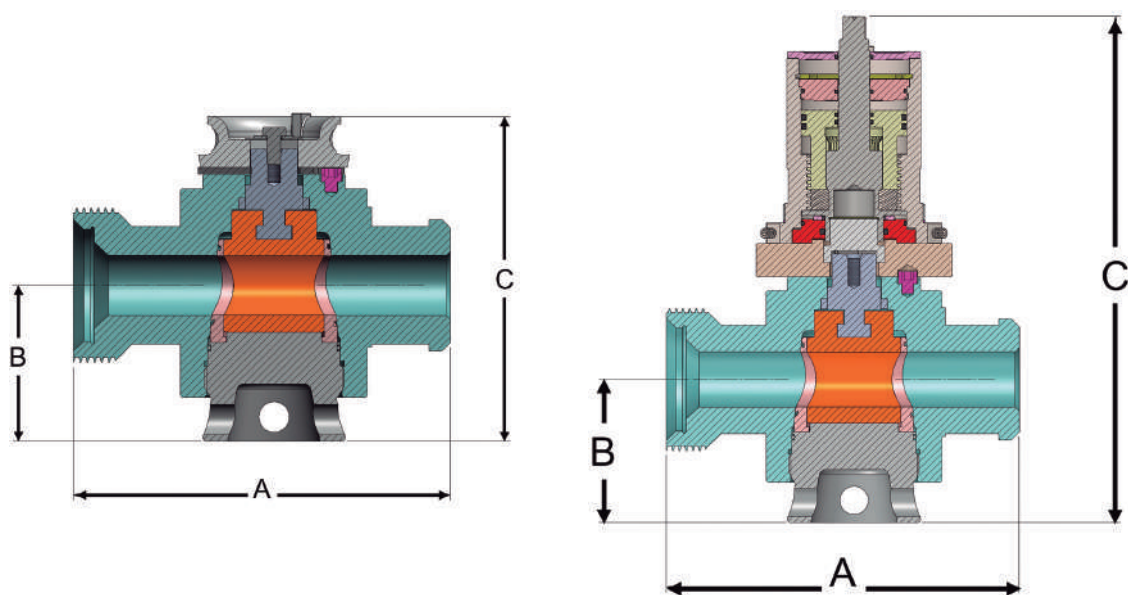

Connection Type	Actuation	Temperature	Service Type	Dim. A (in)	Dim. B (in)	Dim. C (in)	Weight (LBS)
Hammer Union	Manual	(P+U) -20 to 250 °F	Standard	13.88	5.41	10.64	80
Hammer Union	Manual	(P+U) -20 to 250 °F	H2S	13.88	5.41	10.64	80
Hammer Union	Hydraulic	(P+U) -20 to 250 °F	Standard	13.88	5.41	19.11	120
Hammer Union	Hydraulic	(P+U) -20 to 250 °F	H2S	13.88	5.41	19.11	120

Plug Valves

3" Model 700 Plug Valve Specifications (up to 15,000 psi)

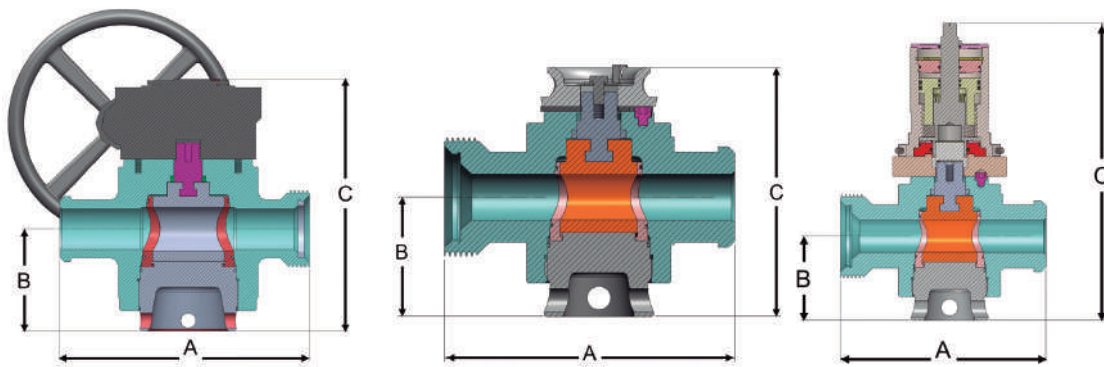

Connection Type	Actuation	Temperature	Service Type	Dim. A (in)	Dim. B (in)	Dim. C (in)	Weight (LBS)
Hammer Union	Manual	(P+U) -20 to 250 °F	Standard	17.52	7.18	12.94	140
Hammer Union	Manual	(P+U) -20 to 250 °F	H2S	17.52	7.18	12.94	140
Hammer Union	Gear Operator	(P+U) -20 to 250 °F	Standard	17.52	7.18	21.33	250
Hammer Union	Gear Operator	(P+U) -20 to 250 °F	H2S	17.52	7.18	21.33	250
Hammer Union	Hydraulic	(P+U) -20 to 250 °F	Standard	17.52	7.18	16.00	240
Hammer Union	Hydraulic	(P+U) -20 to 250 °F	H2S	17.52	7.18	16.00	240

WFB, WOM Flowback Chokes


The WOM Flowback choke, Model WFP is designed with Hammer Union connections and is well suited for fracking, flow back, and well service applications.

Available in both a 2" body with a 1" maximum orifice and a 3" nominal body with a maximum orifice size of 2".



Adjustable Choke Specifications

End Type	Style	Connection Type	Temp	Service Type	Dim. A (in/mm)	Dim. B (in/mm)
Model : WFB-20 2" 1502F x 2" 1502M	0.75 Seat	Hammer Union	Low	Std.	9.91 / 251.7	6.06 / 153.9
Model : WFB-20 2" 1502F x 2" 1502M	0.75 Seat	Hammer Union	Low	H2S	9.91 / 251.7	6.06 / 153.9
Model : WFB-20 2" 1502M x 2" 1502F	0.75 Seat	Hammer Union	Low	Std.	9.91 / 251.7	6.06 / 153.9
Model : WFB-20 2" 1502F x 2" 1502F	0.75 Seat	Hammer Union	Low	Std.	9.91 / 251.7	6.06 / 153.9
Model : WFB-20 2" 1502F x 2" 1502M	0.75 Seat	Hammer Union	Low	Std.	9.91 / 251.7	6.06 / 153.9
Model : WFB-20 2" 1502F x 2" 1502M	1.00 Seat	Hammer Union	Low	H2S	9.91 / 251.7	6.06 / 153.9
Model : WFB-20 2" 1502M x 2" 1502M	1.00 Seat	Hammer Union	Low	Std.	9.91 / 251.7	6.06 / 153.9
Model : WFB-20 2" 1502M x 2" 1502F	1.00 Seat	Hammer Union	Low	Std.	9.91 / 251.7	6.06 / 153.9
Model : WFB-30 3" 1502F x 3" 1502M	2.00 Seat	Hammer Union	Low	Std.	11.88 / 301.8	8.38 / 212.9
Model : WFB-30 3" 1502F x 3" 1502M	2.00 Seat	Hammer Union	Low	H2S	11.88 / 301.8	8.38 / 212.9

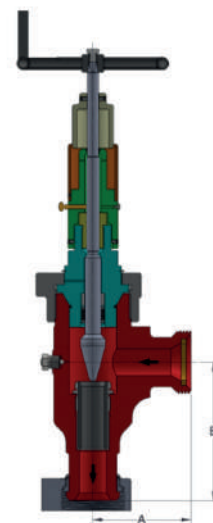

Flowline Equipment

WOM provides a full range product offering for Well Service Solutions including well test and flowline equipment. Leveraging WOM's worldwide quality manufacturing capacity and strategic stocking locations, WOM is ready to meet your demands.



Flow Rates				
Type	Size / Pressure	ID	Max Flow (GPM)	Max Flow (BPM)
Pipe NPS Hammer Union	2" 1502	1.5	315	7.5
	3" 1502	2.3	672	16
Pipe Integral Hammer Union	2" 15K	1.5	315	7.5
	3" 15K	2.3	777	18.5
Integral Cross Overs - Hammer Union)	2" 1502	1.5	315	7.5
	3" 1502	2.3	777	18.5
Type	Size / Pressure	Max Flow (GPM)		Max Flow (BPM)
Integral Hammer Union Connections	2" 1502	315		7.5
	3" 1502	643		15.3
Plug Valves	1" x 2" 1502	90		2.1
	2" 1502	174		4.1
	3" 1502	778		18.5
Swivel Hammer Union	2" 1502	315		7.5
	3" 1502	778		18.5

Working Pressure			
End Connection	Standard	Max Working Pressue (PSI)	Max Flow (BPM)
1502 Sour Service	2" 1502	10K	7.5
	3" 1502	10K	16
1502 Standard Service	2" 15K	15K	7.5
	3" 15K	15K	18.5



Flowline Equipment

WOM provides a full range product offering for Well Service Solutions including well test and flowline equipment. Leveraging WOM's worldwide quality manufacturing capacity and strategic stocking locations, WOM is ready to meet your demands.



WOM Flowback Product	
Type	Size/Pressue
Pipe NPS Hammer Union	2" 1502
	3" 1502
Pipe Integral Hammer Union	2" 15K
	3" 15K
Integral Cross Overs-Hammer Union	2" 1502
	3" 1502
Type	Size/Pressue
Integral Hammer Union Connections	2" 1502
	3" 1502
Plug Valves	1" x 2" 1502
	2" 1502
	3" 1502
Swivel Hammer Union	2" 1502
	3" 1502

Hammer Unions

WOM Hammer Unions offer a pressure-tight, positive seal for both standard and sour service. Each union is thoroughly inspected to ensure long, dependable service in the most extreme conditions. Available in stock at our Houston and Midland facilities.

- Color coded for quick identification
 - WOM Orange – Standard Service
 - Green – H₂S Service
- Designed to meet and exceed NACE MR-01-75 and API requirements
- Material manufactured to ASTM and/or AISI standards
- All unions provide pressure-tight & positive sealing for low-pressure services (500 to 2,000 PSI)
- Range from 1/2" to 12" with cold working pressures from 500 to 20,000 PSI
- Fully interchangeable with most major brands of Hammer Unions
- WOM manufactured rubber seals



Fig	NPS Pipe Sizes Threaded / Butt Weld Unions												
	1/2"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	8"	10"	12"
100					X	X	X	X	X	X	X		
200		X	X	X	X	X	X	X	X	X	X	X	
201						X							
206		X	X	X	X	X	X	X	X	X	X	X	
207							X	X		X			
600													
602		X	X	X	X		X	X					
1002		X	X	X	X		X	X	X	X			
1003							X	X	X				
1502		X		X	X		X	X	X	X			
2002					X		X	X	X	X			
2202					X		X	X	X	X			

*Note - Please contact factory for additional sizes available.



Pups Joints

WOM brand Pup Joints are available in NPST and Integral Style for both standard and H2S services, NACE MR-01-75/ISO 15156.

- Available in butt weld, integral, threaded (LPT & NPST)
- Forged from Alloy Steel one piece construction
- Sizes from 2" to 3". Integral Pup Joint available in lengths up to 12 feet while threaded / butt weld is available up to 20 feet
- Available in 6,000 to 20,000 PSI pressure rating
- All products manufactured from forged steel which meets ASTM and/or AISI standards
- Available in both standard and H2S service
- Typical Applications Include:
 - Well Testing
 - Fracturing
 - Cement Manifolds



Hose Loops

WOM Cementing and Circulating hose loops utilize the combination of WOM's swivel joint flexibility and hose design for easy connection and storage for transportation.

- Hose Loops can be custom ordered in non-standard lengths with minimal lead time for custom requirements.
- Extra High Pressure Cementing/ Circulating Hose Loops, Figure 1502 & 1002, in 2" and 3" sizes.
- For test lines, fracturing, acidizing, cementing and well servicing up to 15,000-psi CWP.
- Manufactured to the highest quality standards in the industry.
- Optimal combination of core strength and case hardness without sacrificing ductility.




Swivel Joints

WOM Swivel Joints are available in sizes 2" – 3" with pressure ratings up to 15,000 PSI.


Features include:

- Eight short radius Swivel Joint styles and configurations are available
- Threaded, integral wing union, beveled for welding or flanged end connections are available
- Sizes available 1" to 3" furnished with high nitrile packing and brass or stainless steel ring
- All joints are specially heat treated to achieve optimal hardness
- All materials meet ASTM and/or AISI standards
- 100% quality control and testing
- Stock Availability in WOM Houston and Midland Facilities
- Sour gas Swivel Joints are manufactured in accordance with the National Association of Corrosion Engineers (NACE) standard MR-01-75 & the American Petroleum Institute's (API) standard RP-14-E
- Ease rotation and movement without sacrificing strength and integrity of the steel
- Streamlined bore minimizes flow restrictions, turbulence and pressure drop
- Long-sweep Swivel Joints have extra-long radius elbows for better flow characteristics
- Manufactured specifically for high pressure applications
- Dual and tri-race ball bearing Swivel Joints are matched to load capacities & service conditions
- All ball races are either flame hardened, carburized & hardened or snap-in stainless steel

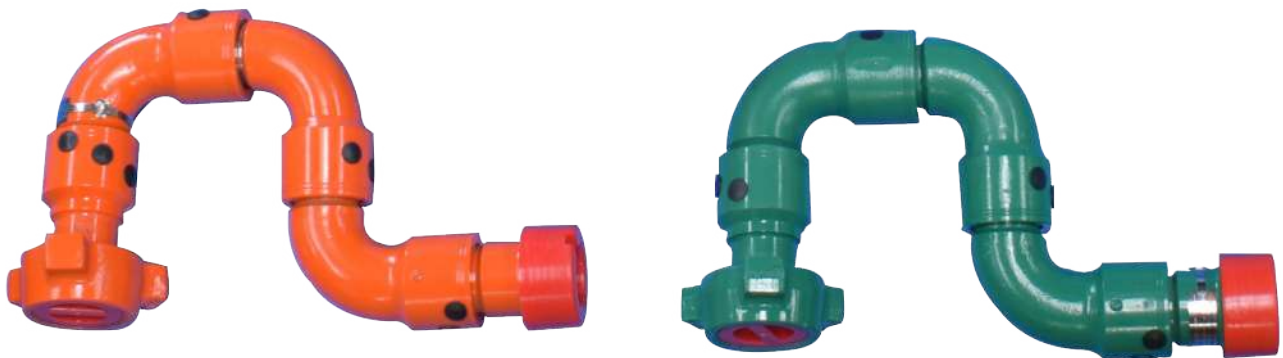

Swivel Joints


Style 10 Swivel

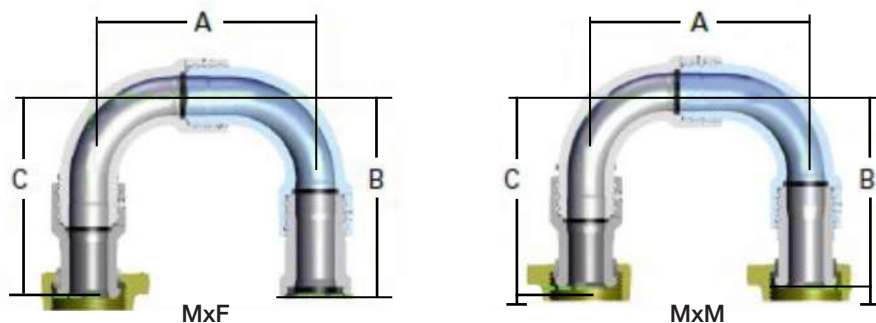

Size	End Connection	Temp	Service	Part Number	Dim A (in / mm)	Dim B (in / mm)	Dim C (in / mm)	WT (lb/kg)	Kit PN
2"	1502 M x 1502 F	Low	Std	WSJ21502-10	10.69 / 271.5	10.91 / 277.1	10.91 / 277.1	67 / 29.9	Standard Service WSJ21502-10-KIT Sour WSJ21502-10- KIT-1
2"	1502 M x 1502 M	Low	Std	WSJ21502-10MM	10.69 / 271.5	10.91 / 277.1	10.91 / 277.1	77 / 34.9	
2"	1502 F x 1502 F	Low	Std	WSJ21502-10FF	10.69 / 271.5	10.91 / 277.1	10.91 / 277.1	67 / 29.9	
2"	1502 M x 1502 F	Low	H2S	WSJ21502-10MF-SG	10.69 / 271.5	10.91 / 277.1	10.91 / 277.1	67 / 29.9	
2"	1502 M x 1502 M	Low	H2S	WSJ21502-10MM-SG	10.69 / 271.5	10.91 / 277.1	10.91 / 277.1	77 / 34.9	
3"	1502 M x 1502 F	Low	Std	WSJ31502-10MF	16.37 / 415.8	14.54 / 369.3	14.50 / 368.3	134 / 60.8	
3"	1502 M x 1502 M	Low	Std	WSJ31502-10MM	16.37 / 415.8	14.50 / 368.3	14.50 / 368.3	147 / 66.7	
3"	1502 M x 1502 F	Low	H2S	WSJ31502-10MF-SG	16.37 / 415.8	14.54 / 369.3	14.50 / 368.3	134 / 60.8	
3"	1502 M x 1502 M	Low	H2S	WSJ31502-10MM-SG	16.37 / 415.8	14.50 / 368.3	14.50 / 368.3	147 / 66.7	
3"	1502 F x 1502 F	Low	H2S	WSJ31502-10FF-SG	16.37 / 415.8	14.54 / 369.3	14.54 / 369.3	134 / 60.8	

* Additional configurations available - Consult Factory

Style 20 Swivel




Size	End Connection	Temp	Service	Part Number	Dim A (in / mm)	WT (lb/kg)	Kit PN
2"	1502M x 1502F	Low	Std	WSJ21502-20MF	11.12 / 282.4	31 / 14.1	Standard Service WSJ21502-20-KIT Sour WSJ21502-20-KIT-1
2"	1502M x 1502F	Low	H2S	WSJ21502-20MF-SG	11.12 / 282.4	31 / 14.1	
3"	1502M x 1502F	Low	Std	WSJ31502-20MF	12.62 / 320.5	55 / 24.9	

* Additional configurations available - Consult Factory

Swivel Joints


Style 30 Swivel

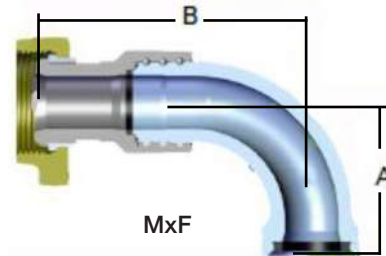

Size	End Connection	Temp	Service	Part Number	Dim A (in / mm)	Dim B (in / mm)	WT (lb/kg)	Kit PN
2"	1502M x 1502F	Low	Std	WSJ21502-30MF	5.50 / 139.7	10.90 / 276.9	38 / 17.2	Standard Service WSJ21502-30-KIT Sour WSJ21502-30-KIT-1
2"	1502M x 1502F	Low	H2S	WSJ21502-30MF-SG	5.50 / 139.7	10.9 / 276.9	38 / 17.2	
3"	1502M x 1502F	Low	Std	WSJ31502-30MF	8.09 / 205.5	14.49 / 368	71 / 32.2	

* Additional configurations available - Consult Factory

Style 50 Swivel

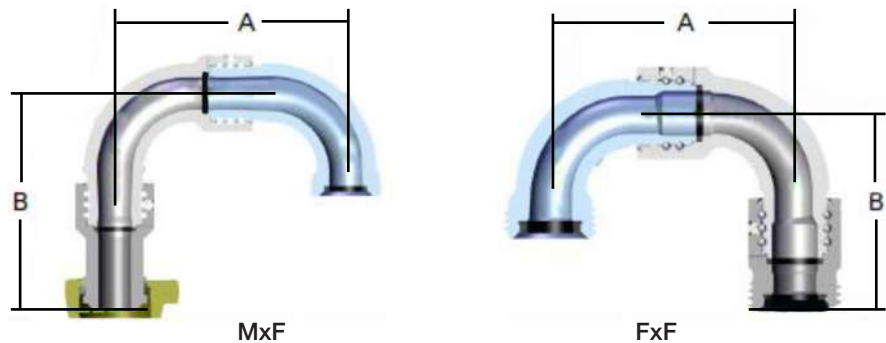


Size	End Connection	Temp	Service	Part Number	Dim A (in / mm)	Dim B (in / mm)	WT (lb/kg)	Kit PN
2"	1502 M x 1502 F	Low	Std	WSJ21502-50	10.69 / 271.5	10.91 / 277.1	56 / 25.4	Standard Service WSJ21502-50-KIT Sour
2"	1502 F x 1502 F	Low	Std	WSJ21502-50FF	10.69 / 271.5	10.91 / 277.1	43 / 19.5	
2"	1502 M x 1502 F	Low	H2S	WSJ21502-50MF-SG	10.69 / 271.5	10.91 / 277.1	56 / 25.4	
2"	1502 F x 1502 F	Low	H2S	WSJ21502-50FF-SG	10.69 / 271.5	10.91 / 277.1	43 / 19.5	
3"	1502 M x 1502 F	Low	Std	WSJ31502-50MF	16.37 / 415.8	14.50 / 368.3	111 / 50.3	WSJ21502-50-KIT-1
3"	1502 F x 1502 F	Low	Std	WSJ31502-50FF-SG	16.37 / 415.8	14.54 / 369.3	102 / 46.3	
3"	1502 M x 1502 F	Low	H2S	WSJ31502-50MF-SG	16.37 / 415.8	14.50 / 368.3	111 / 50.3	

* Additional configurations available - Consult Factory



Swivel Joints


Style 60 Swivel

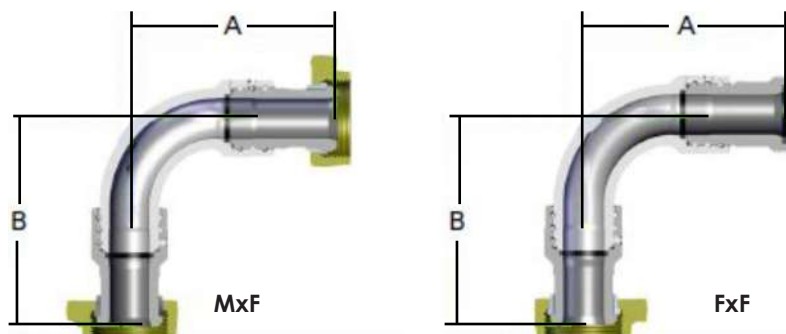

Size	End Connection	Temp	Service	Part Number	Dim A (in / mm)	Dim B (in / mm)	WT (lb/kg)	Kit PN
2"	1502 M x 1502 M	Low	Std	WSJ21502-60MM	10.91 / 277.1	10.90 / 276.9	48 / 21.8	Standard Service WSJ21502-60-KIT Sour Service WSJ21502-60-KIT-1
2"	1502 M x 1502 F	Low	H2S	WSJ21502-60MF	10.91 / 277.1	10.90 / 276.9	36 / 16.3	
3"	1502 M x 1502 M	Low	Std	WSJ31502-60MM	14.50 / 368.3	14.50 / 368.3	107 / 48.5	
3"	1502 M x 1502 F	Low	H2S	WSJ31502-60MF	14.50 / 368.3	14.46 / 367.3	95 / 43.1	

* Additional configurations available - Consult Factory

Style 80 Swivel


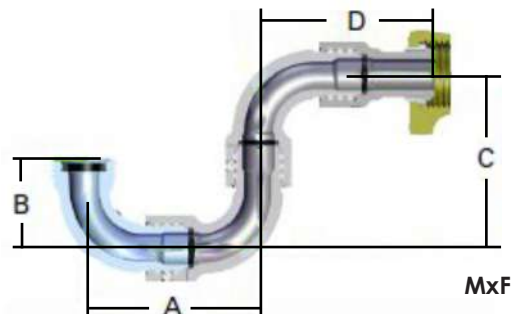


Size	End Connection	Temp	Service	Part Number	Dim A (in / mm)	Dim B (in / mm)	Dim C (in / mm)	Dim D (in / mm)	WT (lb/kg)	Kit PN
2"	1502 M x 1502 M	Low	Std	WSJ21502-80MM	10.81 / 274.6	5.56 / 141.2	10.75 / 273.1	10.90 / 276.9	74 / 33.6	WSJ21502-80-KIT
3"	1502 M x 1502 F	Low	Std	WSJ31502-80MM	16.36 / 41.5	8.09 / 205.5	16.37 / 415.8	14.49 / 368	151 / 68.5	

* Additional configurations available - Consult Factory

Swivel Joints

Style 100 Swivel

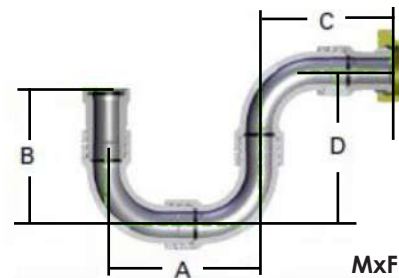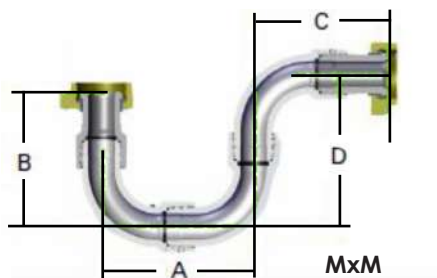


Size	End Connection	Temp	Service	Part Number	Dim A (in / mm)	Dim B (in / mm)	Dim C (in / mm)	Dim D (in / mm)	WT (lb/kg)	Kit PN
2"	1502 M x 1502 M	Low	Std	WSJ21502-100	10.69 / 271.5	10.91 / 277.1	10.91 / 277.1	10.69 / 271.5	98 / 44.5	"Standard Service WSJ21502-100-KIT Sour WSJ21502-100-KIT-1"
2"	1502 M x 1502 F	Low	Std	WSJ21502-100MF	10.69 / 271.5	10.91 / 277.1	10.91 / 277.1	10.69 / 271.5	85 / 38.6	
2"	1502 M x 1502 F	Low	H2S	WSJ21502-100MF-SG	10.69 / 271.5	10.91 / 277.1	10.91 / 277.1	10.69 / 271.5	85 / 38.6	
3"	1502 M x 1502 M	Low	Std	WSJ31502-100MM	16.37 / 415.8	14.50 / 368.3	14.50 / 368.3	16.37 / 415.8	186 / 84.4	
3"	1502 M x 1502 F	Low	Std	WSJ31502-100MF	16.37 / 415.8	14.54 / 369.3	14.50 / 368.3	16.37 / 415.8	174 / 78.9	
3"	1502 M x 1502 F	Low	H2S	WSJ31502-100MM-SG	16.37 / 415.8	14.54 / 369.3	14.50 / 368.3	16.37 / 415.8	174 / 78.9	

** Kit Contents: Ball Plugs, Retainer Rings, Elastomers, Swivel Balls, Port Screws

Integral Connections


Crosses

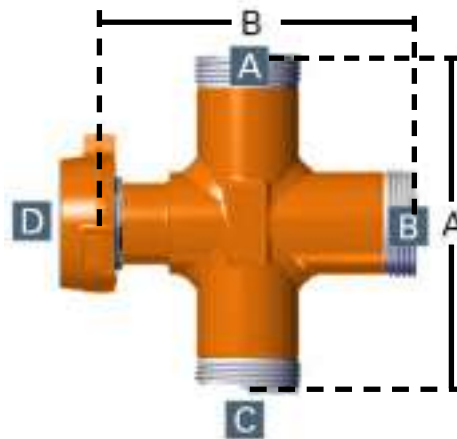

Size	A	B	C	D	Temp	Service	PN	Dim A (in / mm)	Dim B (in / mm)	ID (in / mm)	OD (in / mm)	WT (lb/kg)
2"	1502 F	1502 F	1502 M	1502 F	Low	Std	WC21502FFMF	12.13 / 308.1	12.13 / 308.1	1.5 / 38.10	2.375 / 60.325	50 / 22.7
2"	1502 F	1502 M	1502 M	1502 M	Low	Std	WC21502FMMM	12.13 / 308.1	12.13 / 308.1	1.5 / 38.10	2.375 / 60.325	68 / 30.8
3"	1502 F	1502 F	1502 M	1502 F	Low	Std	WC31502FFMF	16.88 / 428.8	16.88 / 428.8	2.30 / 58.42	3.5 / 88.90	139 / 63

* Additional configurations available - Consult Factory

Tees

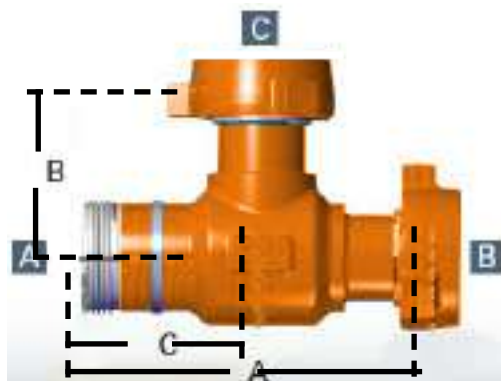


Size	A	B	C	Temp	Service	PN	Dim A (in / mm)	Dim B (in / mm)	Dim C (in / mm)	ID (in / mm)	OD (in / mm)	WT (lb/kg)
2"	1502 F	1502 F	1502 F	Low	Std	WT21502FFF	12.13 / 308.1	6.06 / 153.9	6.06 / 153.9	1.5 / 38.10	2.375 / 60.325	35 / 15.9
2"	1502 F	1502 F	1502 M	Low	Std	WT21502FFM	12.13 / 308.1	6.06 / 153.9	6.06 / 153.9	1.5 / 38.10	2.375 / 60.325	43 / 19.5
2"	1502 F	1502 M	1502 F	Low	Std	WT21502FMF	12.13 / 308.1	6.06 / 153.9	6.06 / 153.9	1.5 / 38.10	2.375 / 60.325	43 / 19.5
2"	1502 M	1502 F	1502 M	Low	Std	WT21502MFM	12.13 / 308.1	6.06 / 153.9	6.06 / 153.9	1.5 / 38.10	2.375 / 60.325	44 / 20
2"	1502 F	1502 M	1502 M	Low	Std	WT21502FMM	12.13 / 308.1	6.06 / 153.9	6.06 / 153.9	1.5 / 38.10	2.375 / 60.325	54 / 24.5
2"	1502 M	1502 M	1502 F	Low	Std	WT21502MMF	12.13 / 308.1	6.06 / 153.9	6.06 / 153.9	1.5 / 38.10	2.375 / 60.325	53 / 24
3"	1502 F	1502 M	1502 F	Low	Std	WT31502FMF	16.88 / 428.8	8.44 / 214.4	8.44 / 214.4	1.5 / 38.10	2.375 / 60.325	122 / 55.3
3"	1502 M	1502 M	1502 F	Low	Std	WT31502MMF	16.88 / 428.8	8.44 / 214.4	8.44 / 214.4	2.30 / 58.42	3.5 / 88.90	120 / 54.4
3"	1502 F	1502 M	1502 M	Low	Std	WT31502FMM	16.88 / 428.8	8.44 / 214.4	8.44 / 214.4	2.30 / 58.42	3.5 / 88.90	128 / 58.1
3"	1502 M	1502 F	1502 M	Low	Std	WT31502MFM	16.88 / 428.8	8.44 / 214.4	8.44 / 214.4	2.30 / 58.42	3.5 / 88.90	128 / 58.1

* Additional configurations available - Consult Factory

Integral Connections


90 Degrees Ells

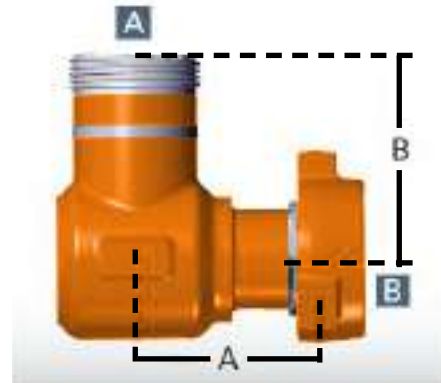

Size	A	B	Temp	Service	PN	Dim A (in / mm)	Dim B (in / mm)	ID (in / mm)	OD (in / mm)	WT (lb/kg)
2"	1502 F	1502 M	Low	Std	W90L215FM	6.06 / 153.9	6.06 / 153.9	1.5 / 38.10	2.375 / 60.325	38 / 17.2
2"	1502 M	1502 F	Low	Std	W90L215MF	6.06 / 153.9	6.06 / 153.9	1.5 / 38.10	2.375 / 60.325	38 / 17.2
3"	1502 F	1502 M	Low	Std	W90L315FM	8.44 / 214.4	8.44 / 214.4	2.30 / 58.42	3.5 / 88.90	103 / 46.7
3"	1502 M	1502 F	Low	Std	W90L315MF	8.44 / 214.4	8.44 / 214.4	2.30 / 58.42	3.5 / 88.90	116.4 / 52.8

* Additional configurations available - Consult Factory

Laterals

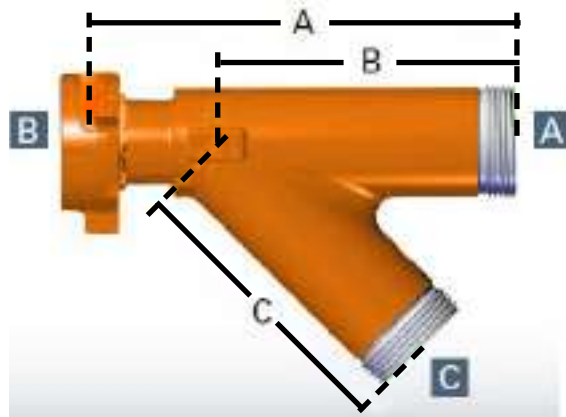


Size	A	B	C	Temp	Service	PN	Dim A (in / mm)	Dim B (in / mm)	Dim C (in / mm)	ID (in / mm)	OD (in / mm)	WT (lb)
2"	1502 F	1502 M	1502 F	Low	Std	WLT215FMF	15.75 / 400.1	9.87 / 250.70	9.87 / 250.70	1.5 / 38.10	2.375 / 60.325	51
2"	1502 M	1502 F	1502 F	Low	Std	WLT215MFF	15.75 / 400.1	9.87 / 250.70	9.87 / 250.70	1.5 / 38.10	2.375 / 60.325	51
2"	1502 M	1502 F	1502 M	Low	Std	WLT215MFM	15.75 / 400.1	9.87 / 250.70	9.87 / 250.70	1.5 / 38.10	2.375 / 60.325	60
3"	1502 F	1502 M	1502 F	Low	Std	WLT315FMF	21.00 / 533.4	14.50 / 368.3	14.00 / 355.6	2.30 / 58.42	3.5 / 88.90	150
3"	1502 M	1502 F	1502 F	Low	Std	WLT315MFF	21.00 / 533.4	14.50 / 368.3	14.00 / 355.6	2.30 / 58.42	3.5 / 88.90	150
3"	1502 M	1502 F	1502 M	Low	Std	WLT315MFM	21.00 / 533.4	14.50 / 368.3	14.00 / 355.6	2.30 / 58.42	3.5 / 88.90	157

* Additional configurations available - Consult Factory

Integral Connections

Wyes

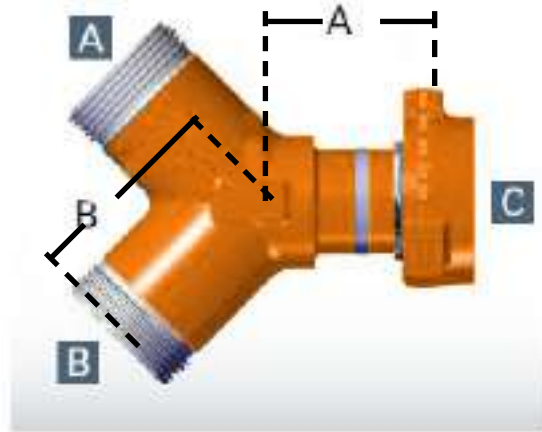

Size	A	B	C	Temp	Service	PN	Dim A (in / mm)	Dim B (in / mm)	ID (in / mm)	OD (in / mm)	WT (lb)
2"	1502 F	1502 F	1502 M	Low	Std	WY215FFM	5.25 / 133.4	5.00 / 127	1.5 / 38.10	2.375 / 60.325	36
2"	1502 M	1502 F	1502 M	Low	H2S	WY215MFM	5.25 / 133.4	5.00 / 127	1.5 / 38.10	2.375 / 60.325	36
3"	1502 F	1502 F	1502 M	Low	Std	WY315FFM	7.75 / 196.9	7.50 / 19.5	2.30 / 58.42	3.5 / 88.90	96


* Additional configurations available - Consult Factory

WOM Manifolds


World Wide Oilfield Machine offers a full range of manifolds for all services, including well service operations and flowback.

Our manifolds are available in standard configurations and can be designed specifically to customer requirements.

9 Valve Manifold Configuration

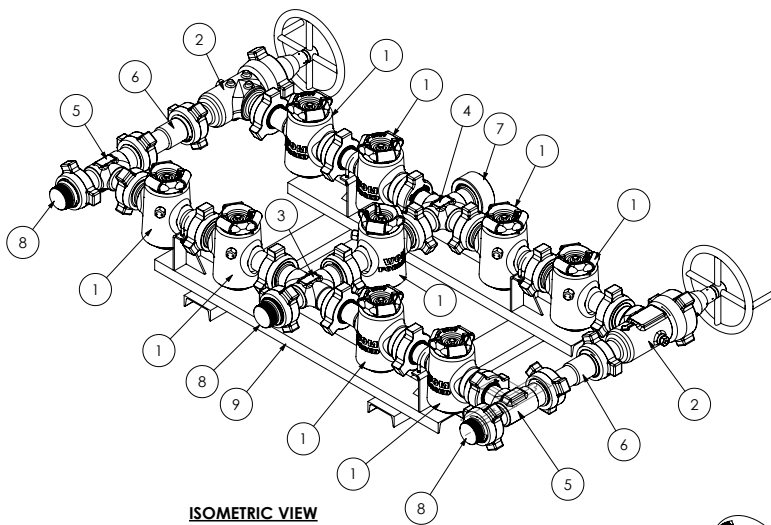

5 Valve Manifold Configuration

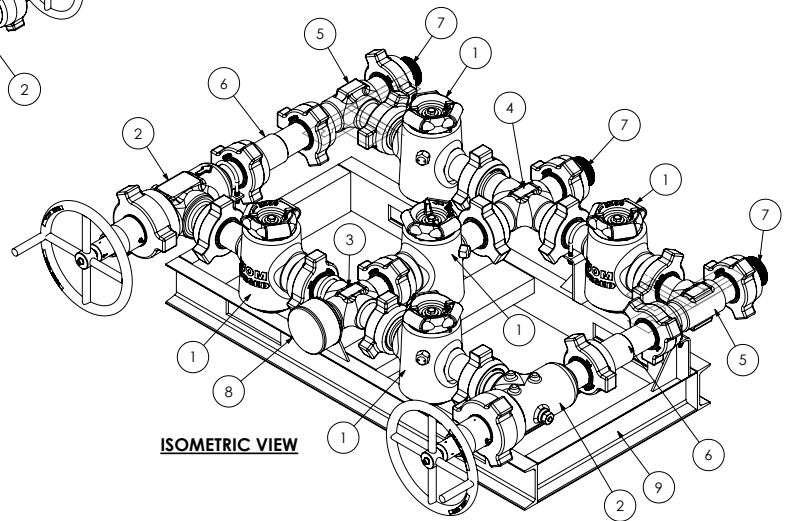

9 Valve Manifold BOM

ITEM	NO.QTY	DESCRIPTION
Plug Valve	9	2-1/16"-15K MANUAL, W/ 2"-FIG.1502 FEMALE X MALE W/ WING NUT
Adjustable Choke	2	2-1/16"-15K W/ 2"-FIG.1502 FEMALE X MALE W/WING NUT END
CROSS (4-WAY) ASSY. (3)	1	2"-FIG. 1502 FEMALE X (1) 2"-FIG. 1502 MALE W/ WING NUT
CROSS (4-WAY) ASSY. (1)	1	2"-FIG. 1502 FEMALE X (3) 2"-FIG. 1502 MALE W/ WING NUT
Tee (3-Way) Assy. (1)	2	2"-FIG. 1502 FEMALE X (2) 2"-FIG. 1502 MALE W/ WING NUT
Wear Sub	2	2"-FIG. 1502 FEMALE X 2"-FIG. 1502 MALE W/ WING NUT X 10.04" LG.

** Also available in 5 valve configuration and 3" 15K





WORLDWIDE OILFIELD MACHINE



VALVES & CONTROLS
A WOM group company



Magnum Technology Center
A WOM Group Company

We are Worldwide Oilfield Machine (WOM) - a global company pioneering Flow Control Solutions for the Surface & Subsea sectors of the oil & gas industry. Headquartered in Houston, Texas, we have manufacturing facilities, engineering centers, sales offices and assembly/testing workshops all over the world.

Our strength is our robust infrastructure that allows us complete control over quality, costs and delivery. With more than 20 patents and noted accreditations, our very own R&D facilities and 24x7 service centers across the globe we have the required capabilities & resources to deliver all your manufacturing needs for the industry.

www.womgroup.com



facebook.com/womglobalgroup
instagram.com/womglobalgroup
twitter.com/womglobalgroup
linkedin.com/company/worldwideoilfieldmachine