

Magnum Gate Valve and Other Valves



**LEADING
THROUGH
INNOVATION**

www.womgroup.com



WORLDWIDE OILFIELD MACHINE

TABLE OF **CONTENTS**



Patented Dual-Seal™ Technology	4
---	----------

Magnum Gate Valve

<i>Magnum Gate Valve Unique Feature.....</i>	<i>5</i>
<i>Magnum Gate Valve Components</i>	<i>6</i>
<i>Magnum Gate Valve Specifications</i>	<i>7</i>
<i>Gate Valve Standard Trims</i>	<i>8</i>
<i>Gate Valve Standard Trim Chart.....</i>	<i>9</i>

Model 200M Gate Valve

<i>Model 200M Gate Valve Features and Benefits</i>	<i>10</i>
<i>Model 200M Gate Valve Specifications.....</i>	<i>11</i>

Magnum Mud Gate Valve

<i>Model 200M Gate Valve Features and Benefits</i>	<i>12-13</i>
--	--------------

Magnum Line Pressure Operated Surface Safety Gate Valves (LPOSSV)

<i>Magnum LPOSSV Features and Benefits</i>	<i>14</i>
--	-----------

Typical Magnum Gate Valve Applications15

Magnum Subsea Gate Valve and Actuator

<i>Magnum Subsea Gate Valve Features and Benefits.....</i>	<i>16</i>
<i>Magnum Subsea Gate Valve with Fail-Safe Actuator.....</i>	<i>17</i>

WOM's Other Dependable Valves

<i>Model WV 200 Gate Valve Features and Benefits</i>	<i>18</i>
<i>Check Valve Features and Benefits</i>	<i>18</i>
<i>Model 600 Mud Valve Features and Benefits</i>	<i>19</i>


Patented Dual-Seal™ Technology

WOM's Magnum Gate Valve provides sealing reliability that is unmatched in the industry. The patented design has been proven in hundreds of well control applications during drilling, testing, production, in onshore, offshore and subsea.

The key to Magnum's superior bi-directional sealing is the "Dual-Seal™" system. This unique "Thru-Conduit" design provides both upstream and downstream sealing, creating pressure-energized balance between the slab gate and the seat assemblies. The "Dual-Seal™" seats expand against the gate when subject to line pressure to form a positive metal-to-metal seal.

The body cavity is exposed to line pressure only during valve opening and closing, ensuring better lubricant retention, less exposure to line contaminants and longer service life with less maintenance.

Advantages of the Magnum Design

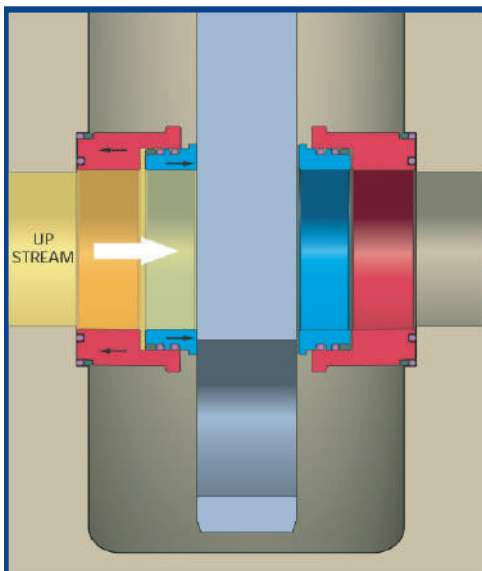


Gate in the CLOSED Position

Primary Upstream Seal presses against the gate to provide a seal and avoid intrusion into the body cavity.


Zero Leak

The heart of this bidirectional valve is the MAGNUM "Sure Seal". This simple gate/seat assembly eliminates gate guides, seat skirts and springs. Instead, line pressure expands the seat assembly against the **floating** gate forming a true upstream seal.

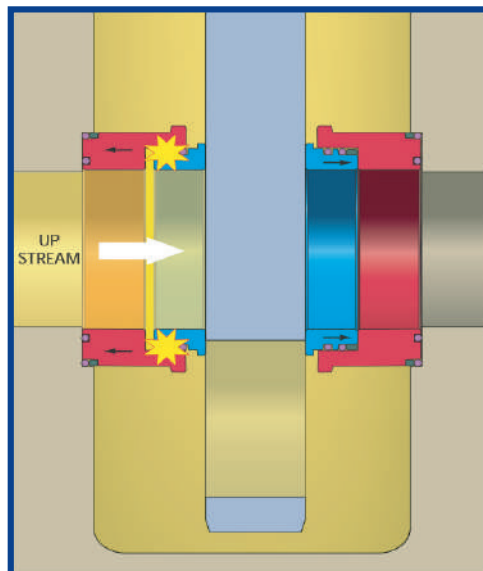

Gate in the CLOSED Position

If the Primary Upstream Seal fails, the Secondary Downstream Seal takes over to avoid intrusion into the thru-bore.

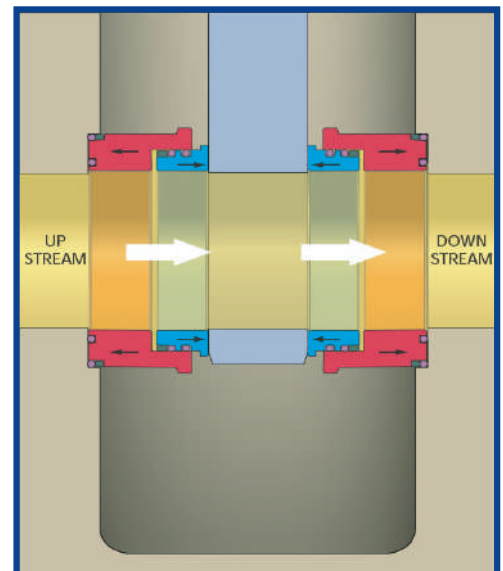

Gate in the OPEN Position

Primary Upstream & Downstream Seals press against the gate to provide a seal and avoid intrusion into the body cavity and thru-bore.

Longer Life


Protection against line ladens will lengthen a valve's service life. WOM's extensive metallurgy expertise insures material selection will be suitable even for harsh CO₂ or H₂S applications.



Magnum Gate Valve

Magnum Gate Valve Unique Features:

- Available in sizes ranging from 1-13/16" to 9"
- Working pressure ratings of 2,000 to 20,000 psi
- Full Bore, Through-Conduit Seal
- Bi-Directional Sealing
 - Primary (Upstream) Seal
 - Secondary (Downstream) Seal
- Lower Torque
 - Floating Gate with T-Slot
 - Centralized stem threads
 - Superior finish on gates and seats
 - Balanced forces on gate and seats
- Longer Life of Gate and Seals
 - Minimal exposure to contaminants
 - Minimal lubricant loss
- Elastomer Assist Metal-to-Metal Seal or Non-Elastomeric Seals
- Differential Avoids Pressure Lock
- Extended Service Life with Minimum Maintenance Requirements

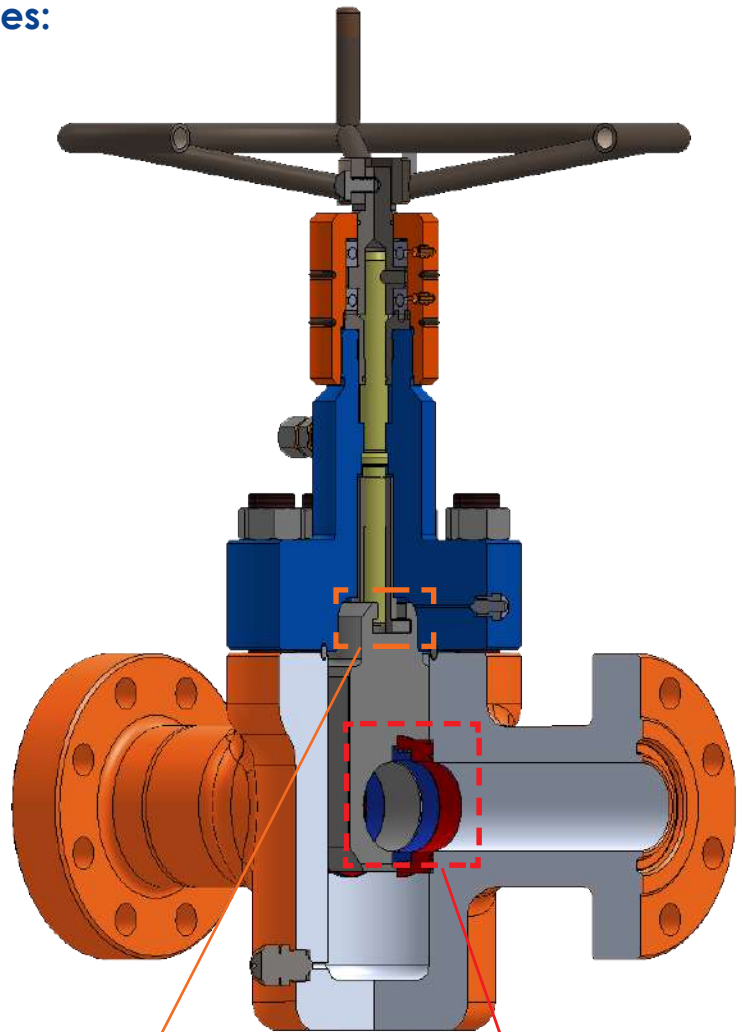


Elastomeric &
Non-Elastomeric Seals


T-SLOT GATE BENEFITS

Low Torque

An independent stem nut allows the gate to float, maintaining contact with the seats without binding on the stem. Better retention of lubricant in the body cavity reduces build-up of contaminants which can increase torque.



Magnum Gate Valve Components

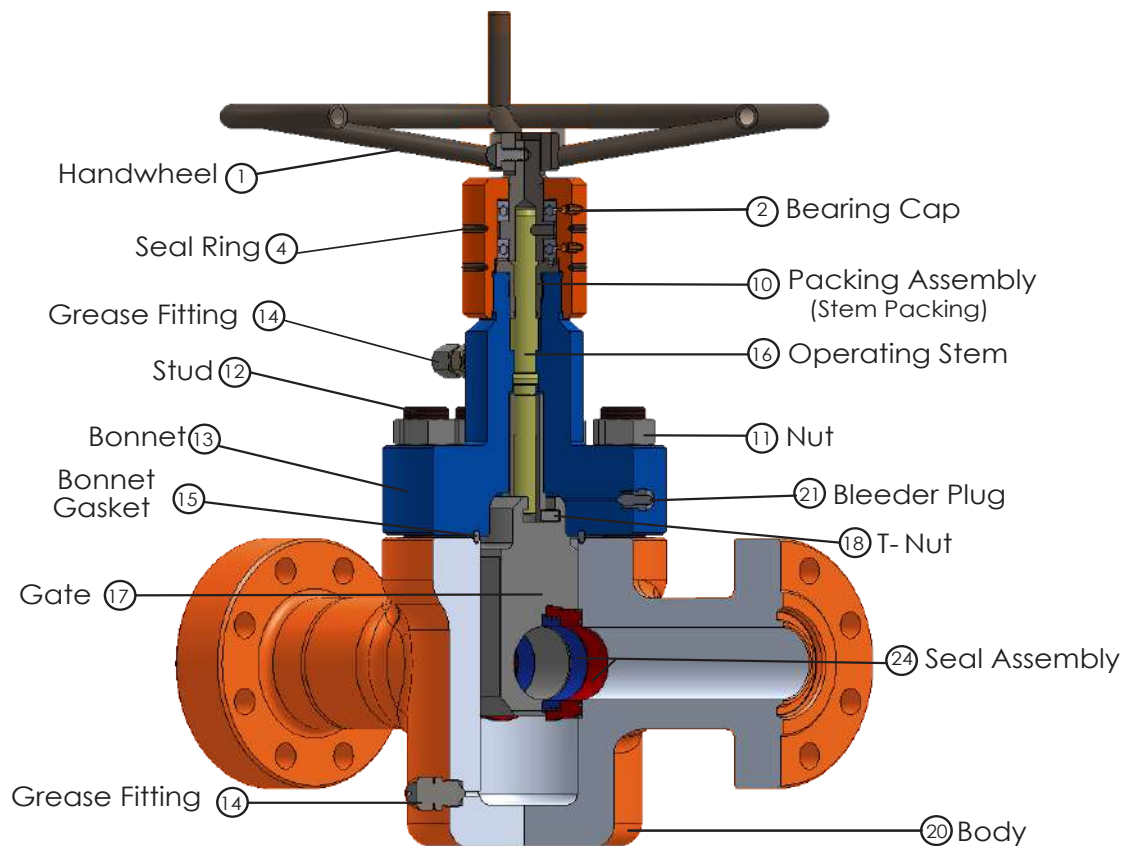

Typical MAGNUM Gate Valve Bill of Material


Item	Description	Qty.	Item	Description	Qty.
1	Handwheel	1	13	Bonnet	1
2	Bearing Cap	1	14	Grease Fitting	2
3	Alemite Fitting	2	15	Bonnet Gasket*	1
4	Seal Ring*	2	16	Operating Stem	1
5	Thrust Bearing*	2	17	Gate*	1
6	Seal Ring*	1	18	T-Nut	1
7	Stem Adapter	1	19	Seal Ring*	1
8	Stem Pin	1	20	Body	1
9	Packing Gland	1	21	Bleeder Plug	1
10	Packing Assembly*	1	22	Seal Ring*	1
11	Nut	8+	23	Bolt with Nut	1
12	Stud	8+	24	Seal Assembly*	1

*Recommended Spare Parts.

Note: One (1) set of spares are recommended per four (4) valves.



Magnum Gate Valve Specifications

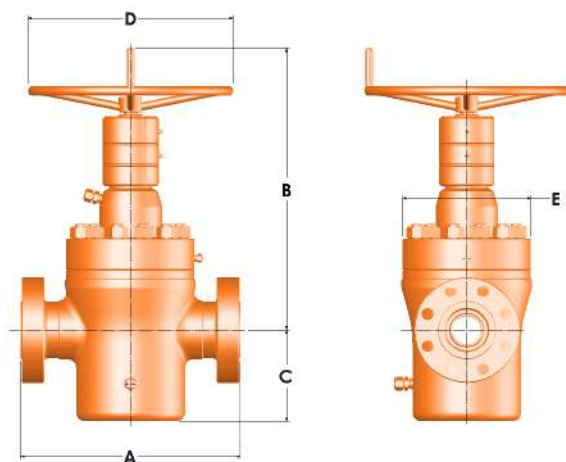

MAGNUM GATE VALVE SPECIFICATION										
VALVE SIZE	PRESSURE RATING psi	NOMINAL BORE SIZE	END TO END 'A'	CENTERLINE TO TOP 'B'	CENTERLINE TO BOTTOM 'C'	HANDWHEEL DIAMETER 'D'	BONNET DIAMETER 'E'	FLANGE RING JOINT	TURNS TO OPEN	TOTAL WEIGHT lbs
1-13/16"	10K	1-13/16"	18.25	26.50	5.96	14.00	9.12	BX-151	12-1/2	250
	15K		18.00	26.50	6.03	14.00	9.12	BX-151	12-1/2	288
2-1/16"	5K	2-1/16"	14.62	25.12	5.89	14.00	7.25	R-24	12-1/2	200
	10K		20.50	26.86	6.23	18.00	9.25	BX-152	13-1/8	400
	15K		19.00	26.86	6.13	18.00	9.63	BX-152	13-1/8	420
	20K*		23.00	23.00*	7.09	24.00	10.50	BX-152	52-1/2	900
2-9/16"	5K	2-9/16"	16.62	26.93	6.65	14.00	8.00	R-27	16-1/4	260
	10K		22.25	26.72	6.87	18.00	9.38	BX-153	15	500
	15K		21.00	30.52	8.96	18.00	11.60	BX-153	20	590
	20K*		26.50	28.42*	10.65	24.00	14.63	BX-153	125	1250
3-1/8"	3K	3-1/8"	17.12	28.53	7.76	14.00	9.25	R-31	18-3/4	440
	5K		18.62	28.62	7.76	18.00	9.25	R-35	18-3/4	440
3-1/16"	10K	3-1/16"	24.38	27.79	7.75	22.00	10.25	BX-154	18-3/4	625
	15K		23.56	30.23	9.77	22.00	13.75	BX-154	15-1/2	1150
	20K*		30.50	32.63*	9.81	24.00	15.00	BX-154	93	1600
4-1/16"	3K	4-1/16"	20.12	31.44	9.81	18.00	10.68	R-37	23-3/4	500
	5K		21.62	31.44	9.81	18.00	10.68	R-39	23-3/4	550
	10K		26.38	31.20	9.86	22.00	12.50	BX-155	24-3/8	1100
	15K*		29.00	32.00*	10.46	24.00	15.00	BX-155	78	1400
	20K*		35.00	35.00*	12.25	24.00	18.00	BX-155	123-3/4	3000
5-1/8"	3K	5-1/8"	24.12	34.00	11.56	22.00	13.00	R-41	29-1/4	1250
	5K		28.62	34.00	11.56	22.00	13.00	R-44	29-1/4	1350
	10K		29.00	35.00	11.56	22.00	13.12	BX-169	23-1/2	1500
7-1/16"	5K	6-1/8"	29.00	38.18	13.96	22.00	14.75	R-46	29.25	900
	10K*	6-3/8"	35.00	43.00*	15.35	24.00	16.63	BX-156	226.75	3000
9"	10K*	9"	41.00	47.00*	19.80	24.00	19.50	BX-157	45	3900

* Gear Operated Valves



Gate Valve Standard Trims

Standard Trim (AA)

For general non-corrosive oil and gas service such as manifolds, Christmas trees, flowlines and other applications.

Stainless Trim (BB)

For general corrosive oil and gas service with limited CO₂ and no H₂S present. The applications require chrome stainless steel internal parts and limited corrosion on internal body surfaces is acceptable.

Full Stainless Trim (CC)

For general corrosive oil and gas service with extreme CO₂ and no H₂S present. For applications where resistance to corrosion due to CO₂ is required.

Super Trim (DD)

For general sour oil and gas service with H₂S and CO₂. For applications where resistance to sulphide stress cracking is required due to H₂S conditions.

Stainless Super Trim (EE)

For corrosive and sour oil and gas service where resistance to both sulphide stress cracking and weight loss corrosion are required due to H₂S and CO₂.

Full Stainless Super Trim (FF)

For sour gas and oil when CO₂ content exceeds the H₂S content. Intended to provide resistance to the metal loss type of corrosion usually associated with CO₂ plus resistance to Hydrogen Sulfide embrittlement.

Special Super Trim (HH)

For extremely high concentrations of H₂S and CO₂ applications.



Gate Valve Standard Trim Chart

Material Class	Body	Bonnet	Gasket	Gate	Seats	Stem	Seat Retainer	T-Nut	Balance Rod
AA	4130	4130	Carbon Steel CAD Plated	4140 HF	4140 HF	4130	17-4H	4130	4130
BB	4130	4130	316/304 SS	410 HF	410 QPQ, 410 HF	17-4PH QPQ	410	410	410
CC	410	410	316/304 SS	410 HF	410 QPQ, 410 HF	17-4PH QPQ	410	410	410
DD-0.5*	4130	4130	316 SS	4140 HF	4140 HF	17-4 PH QPQ	17-4 PH	4130	410
DD-1.5	4130	4130	316 SS	4140 HF	4140 HF	4140 QPQ	410	4130	410
DD-360	4130	4130	316 SS	4140 HF	4140 HF	4140 QPQ	410	4130	410
DD-NL	4130	4130	316 SS	4140 HF	4140 HF	4140 QPQ	410	4130	410
EE-0.5*	4130	4130	316 SS	410 HF	410 HF	17-4 PH QPQ	17-4 PH	410	410
EE-1.5	4130	4130	316 SS	410 HF	410 HF	4140 QPQ	410	410	410
EE-360	4130	4130	316 SS	410 HF	410 HF	Inconel 718	410	410	410
EE-NL (-20° to 250°F)	4130	4130	316 SS	410 HF	410 HF	Inconel 718	410	410	410
EE-NL (-20° to 350°F)	4130	4130	316 SS	410 HF	410 HF	Inconel 725	410	410	410
FF-1.5	410	410	316 SS	410 HF	410 HF	4140 QPQ	410	410	410
FF-360	410	410	316 SS	410 HF	410 HF	Inconel 718	410	410	410
FF-NL (-20° to 250°F)	410	410	316 SS	410 HF	410 HF	Inconel 718	410	410	410
FF-NL (-20° to 350°F)	410	410	316 SS	410 HF	410 HF	Inconel 725	410	410	410
HH-NL (-20° to 250°F)	4130 w/Inconel 625 inlay in all wetted areas	4130 w/Inconel 625 inlay in all wetted areas	Inconel 825	Inconel 718 HF	Inconel 718 HF	Inconel 718	Inconel 718	Inconel 718 QPQ	Inconel 718
HH-NL (-20° to 250°F)	4130 w/Inconel 625 inlay in all wetted areas	4130 w/Inconel 625 inlay in all wetted areas	Inconel 825	Inconel 725 HF	Inconel 725 HF	Inconel 725	Inconel 725	Inconel 725 QPQ	Inconel 725

Notes:

- This Chart is based on API 6A 20th Edition & Nace MR 0175 Second Edition
- All Sub-Sea valve Stems shall be Inconel.
- For -50°F Temperature, there is no change with the valve materials
- Materials shown are for reference purposes only and are subject to change.
- Special trims and materials are available, such as duplex stainless steel for bodies and bonnets, Inconel HF for gates and seats, and Inconel for stems.
- Abbreviations: SS-Stainless Steel; QPQ-Quench Polish Quench; HF-Stellite/ Colmonoy, W/HF-Hard Facing.
- -75°F (-59°C) available upon request.
- Wire-line and fire safe valves available upon request.
- High temperature (450°F) (232°C) valves available upon request.
- QPQ Seats have an option of Colmonoy Hard-Facing.
- Alternate material for Stems-Inconel 725
- Alternate material for HH Trims-Duplex SS




Model 200M Gate Valve

The field-proven and versatile Model 200M Gate Valve provides the reliability and interchangeability necessary for a wide range of demanding flow control applications, including Manifolds and Christmas trees.

Features and Benefits


- Available in sizes 1 13/16" - 7 1/16"
- Working pressure ratings from 2,000 psi-15,000 psi
- Forged body and bonnet for the highest mechanical integrity
- Bi-directional flow design offers versatility and increased service life
- Full bore, Through-Conduit Seal
- Grease injection fitting located in bonnet, eliminating body penetration
- Bearing cap grease fitting allows positive bearing lubrication
- Available in standard flange ends, butt weld ends and block body configurations
- Can be equipped with pneumatic or hydraulic actuators
- The 200M Gate Valve has been API 6A fire tested to 450°F and can be fitted for HPHT service

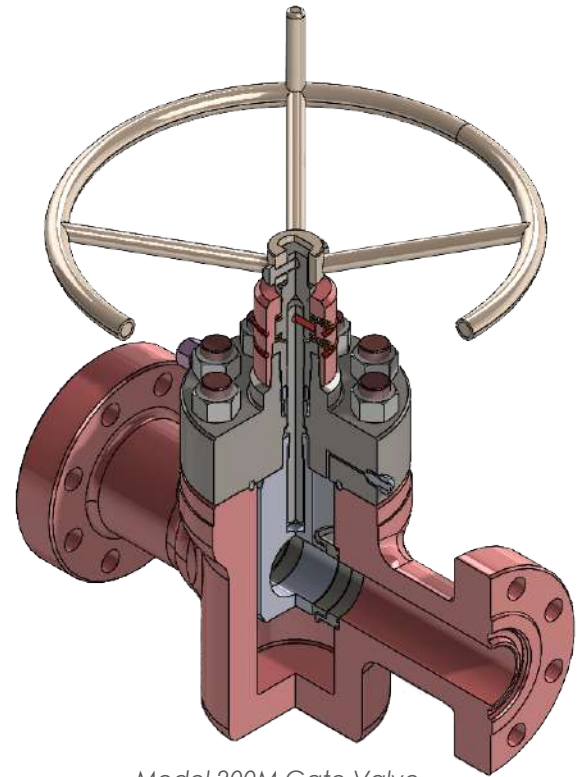

Model 200M Gate Valve




Model 200M Gate Valve Specifications

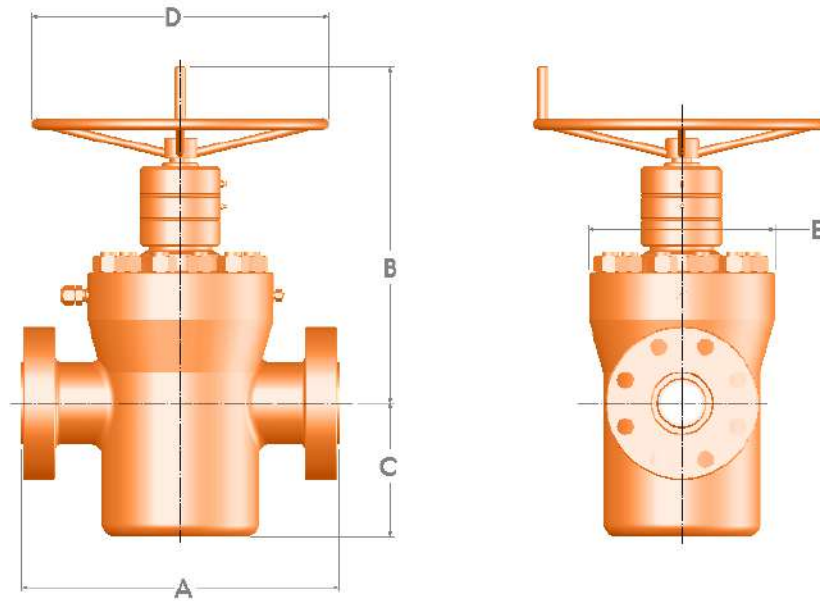

200M GATE VALVE SPECIFICATION										
VALVE SIZE	PRESSURE RATING psi	NOMINAL BORE SIZE	END TO END 'A'	CENTERLINE TO TOP 'B'	CENTERLINE TO BOTTOM 'C'	HANDWHEEL DIAMETER 'D'	BONNET DIAMETER 'E'	FLANGE RING JOINT	TURNS TO OPEN	TOTAL WEIGHT lbs
1-13/16"	10K	1-13/16"	18.25	22.85	5.76	14.00	8.93	BX-151	12-1/4	300
	15K		18.00	22.85	5.88	14.00	9.50	BX-151	12-1/4	400
2-1/16"	5K	2-1/16"	14.62	23.00	5.66	14.00	6.88	R-24	12-3/8	200
	10K		20.50	23.00	5.76	18.00	9.00	BX-152	12-1/4	300
	15K		19.00	23.00	6.13	18.00	9.50	BX-152	12-1/4	325
2-9/16"	5K	2-9/16"	16.62	23.74	6.47	14.00	7.88	R-27	15	260
	10K		22.25	23.58	6.87	18.00	9.38	BX-153	15-3/4	500
	15K		21.00	23.58	7.43	18.00	11.25	BX-153	15-5/8	590
3-1/8"	5K	3-1/8"	18.62	24.49	7.29	18.00	9.12	R-35	18	440
3-1/16"	10K	3-1/16"	24.38	22.42	7.66	22.00	10.12	BX-154	18	625
	15K		23.56	24.57	9.85	22.00	13.75	BX-154	15-1/2	900
4-1/16"	3K	4-1/16"	20.12	27.82	9.50	18.00	10.69	R-37	23-1/2	500
	5K		21.62	26.09	9.50	18.00	10.69	R-39	23-1/2	500
	10K		26.38	25.36	9.78	22.00	12.69	BX-155	23-3/4	1000
	15K		29.00	28.49	10.31	22.00	14.34	BX-155	29-1/4	1400
5-1/8"	5K	5-1/8"	28.62	26.66	11.94	22.00	13.00	R-44	28-3/4	1300
	10K		29.00	29.17	11.56	22.00	13.00	BX-169	23-1/2	1500
7-1/16"	3K	6-1/8"	24.12	28.61	12.92	22.00	13.00	R-45	33	1200
	5K	6-3/8"	29.00	30.07	12.35	22.00	13.00	R-46	34-3/8	1200

Magnum Mud Gate Valve

Magnum Mud Gate Valves are specially designed for mud, cement, fracturing and water service to handle high and fluctuating pressure and abrasives. WOM mud valves are forged bodied and through conduit.

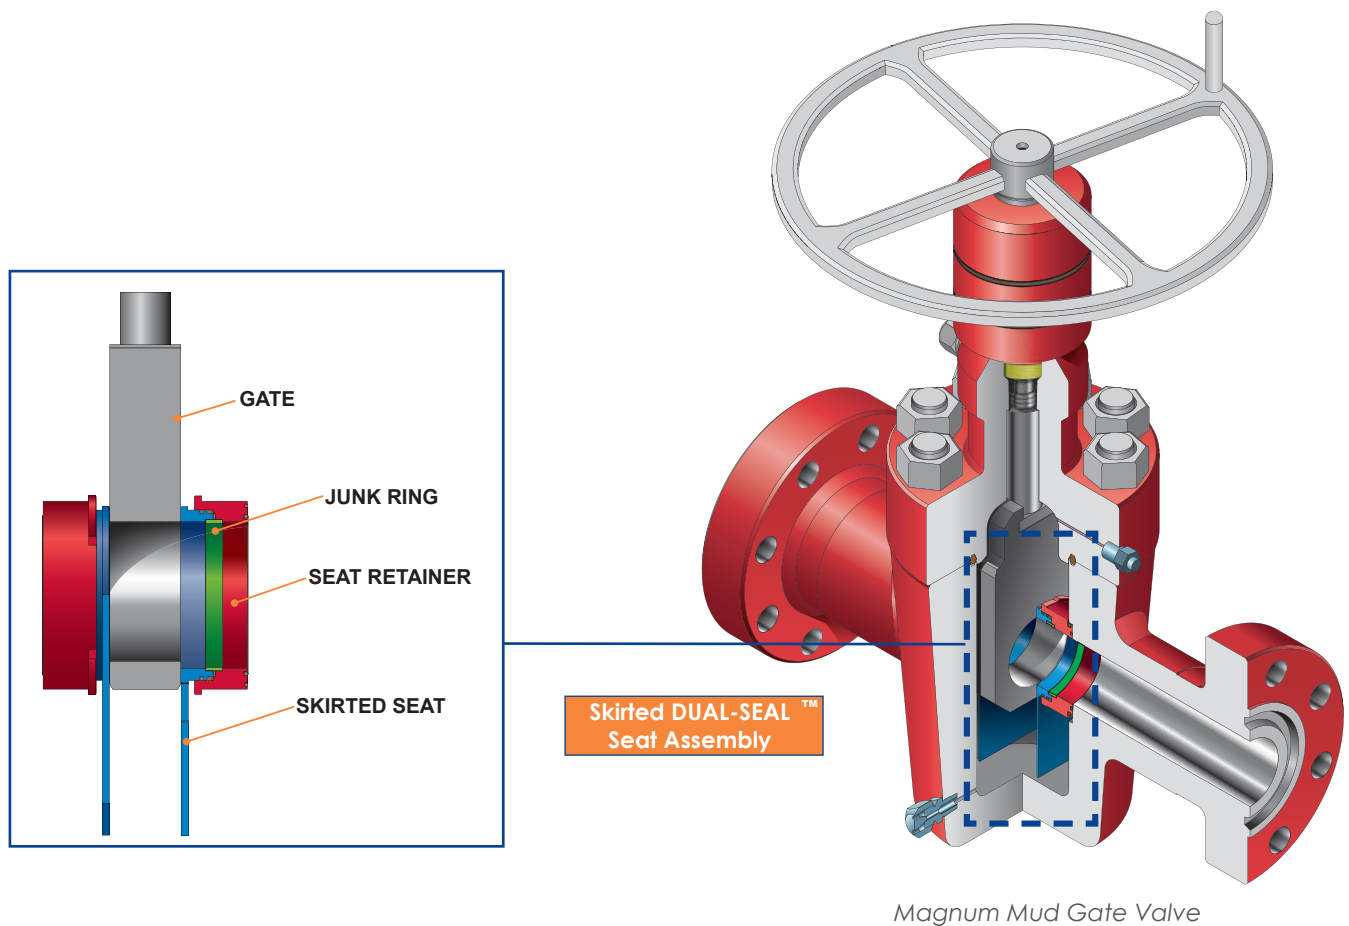

Unlike other mud gate valves, the Magnum Mud Gate Valve with skirted seats, seals "Thru-Conduit" in both "Full-Open" and "Full-Closed" positions. "Thru-Conduit" sealing eliminates the turbulence experienced in the paddle gate mud valve design. Unlike the paddle gate mud valve, the Magnum Mud Gate Valve with added seat skirts, prevents contaminants from entering the gate valve body cavity.

Magnum Mud Gate Valve

Features and Benefits

- Available in sizes 1 13/16" - 5"
- Working pressure ratings of 3,000-15,000 psi
- Features WOM's patented Magnum Dual Seal™ system
- Skirted seat assembly prevents contaminants from entering the valve body cavity
- Hardfacing of components ensures better protection in highly corrosive, erosive and abrasive conditions
- Thru-Conduit seal eliminates the turbulence experienced in paddle gate mud valves
- Can be easily serviced in-line and all internal components can be inspected and replaced
- Body cavity is exposed to line pressure only during valve opening and closing
- Better lubricant retention, less exposure to line contaminants and longer service life than comparable valves
- Fewer replacement parts reduce spare parts inventory
- Available in standard flange ends, hammer union, hub, threaded, or butt weld ends
- Adaptable to all types of WOM actuators and pressure control equipment
- Meet and exceed API 6A and 6D Standards and ISO quality requirements




Magnum Line Pressure Operated Surface Safety Gate Valve

WOM's Line Pressure Operated Surface Safety Gate Valves (LPOSSV) are ideal where control pressure is not available. The system consists of a surface safety gate valve, high pressure pilot, low pressure pilot and a velocity check valve.

Features and Benefits


- Available in sizes 1 13/16" – 7 1/16"
- Working pressure ratings of 2,000-20,000 psi
- Ideal for single point protection
- Self-operating system which uses line pressure as control pressure to activate the actuator
- High and low pressure pilots sense line pressure continuously. Abnormal pressure changes cause the pilots to exhaust control pressure from the safety valve, closing the valve
- Centralized stem threads and T-nut combined with T-slot gate reduce the overall torque needed to cycle the valve
- Colmonoy 4,5 & 75, Tungsten Carbide, Stellite and other HF materials are available
- Compatible with elastomer-assist metal-to-metal seals or non-elastomeric seals

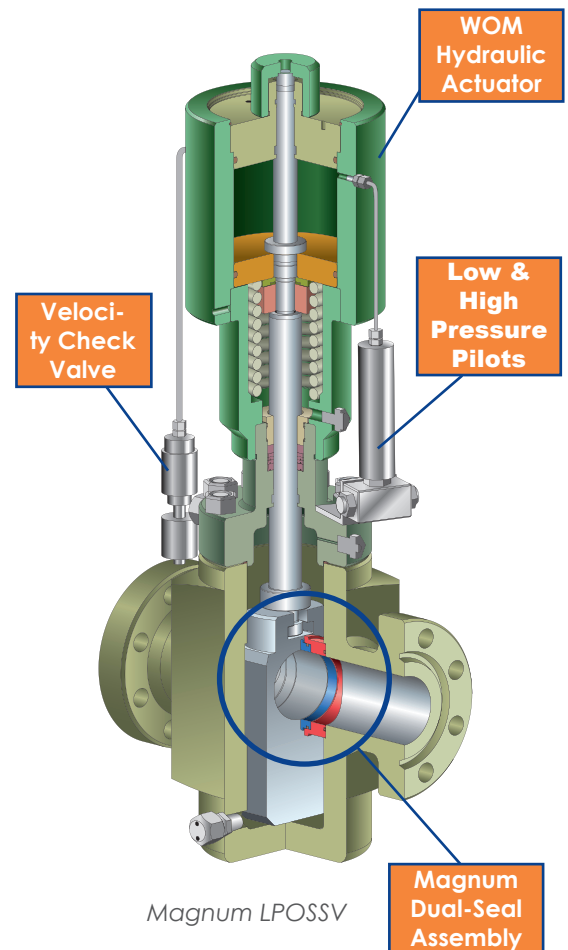

Typical Magnum Gate Valve Applications




Wellheads

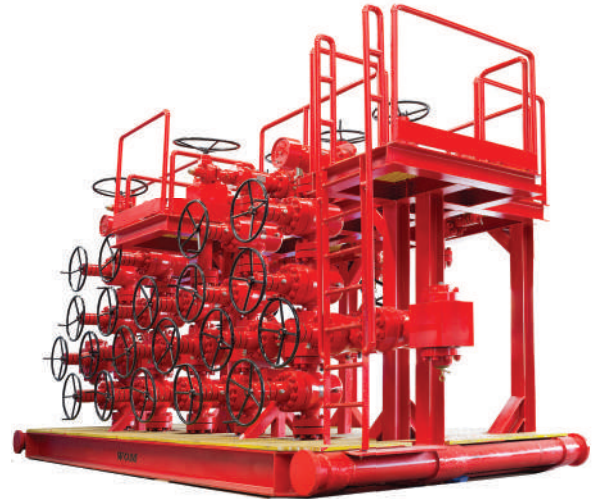


Choke & Kill
Manifolds



Flowheads

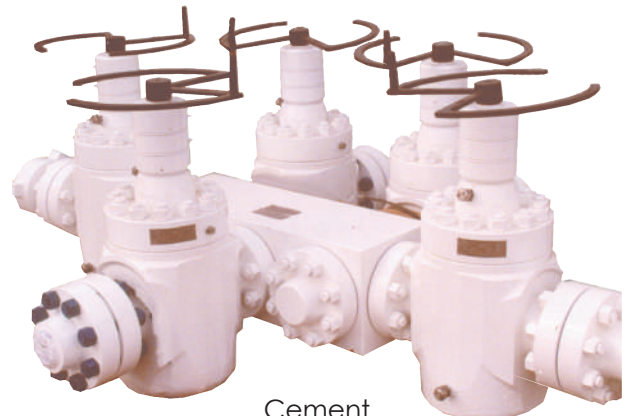

Cement
Manifolds

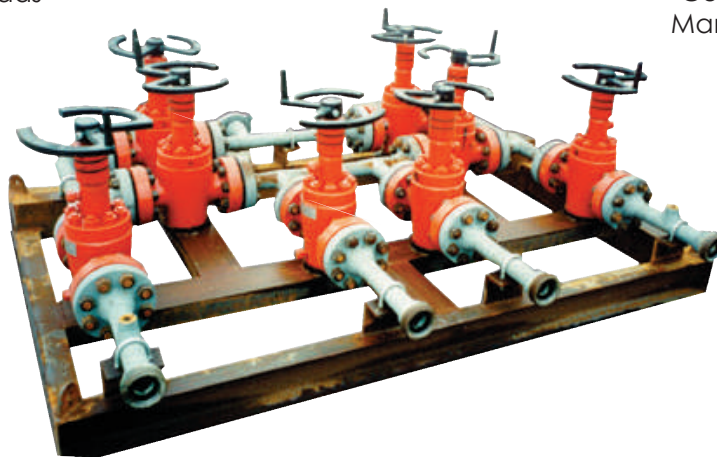

Standpipe Manifolds

Magnum Subsea Gate Valve

The Magnum Subsea Gate Valve and Actuator are designed for deepwater applications. The Magnum Subsea Actuator design has been tested to a water depth of 13,200 and meets all specifications for subsea wellhead and Christmas tree applications. In additional testing, the actuator has been cycled 5,000 times at full working pressure, providing reliability and safety in the most demanding subsea operations.


Features and Benefits

- Available in sizes ranging from 2 1/16" through 7 3/8" and working pressures up to 15,000 psi
- Designed, built and tested to API 6A and 17D
- Magnum Subsea Valve design tested to a water depth of 13,200 feet
- Anti-explosive decompression seals and energized non-elastomeric lip seals
- Metal to metal seal-seat to gate
- Magnum "Dual-Seal" seat design seals upstream and downstream
- With Magnum "Dual-Seal" seat design seals "thru-conduit", bonnet can be removed and replaced while the valve is in working condition. This will minimize the maintenance time and inventory cost for customers
- Gate and seat faces are hard faced with Colmonoy 4, 5 & 75 and polished to 1-2 RMS. This is for wear resistance and low operating torque. Tungsten Carbide, Stellite and other HF material are also available
- Cladding of "all wetted parts" is available
- "T" Slot stem and gate connection allows the gate to "Float" between seats without misaligning the stem under pressure

The Magnum Subsea Gate Valve is available as Dual Block in sizes up to 7 1/16" and in working pressure up to 20,000 psi.




Magnum Subsea Gate Valve with Fail-Safe Actuator

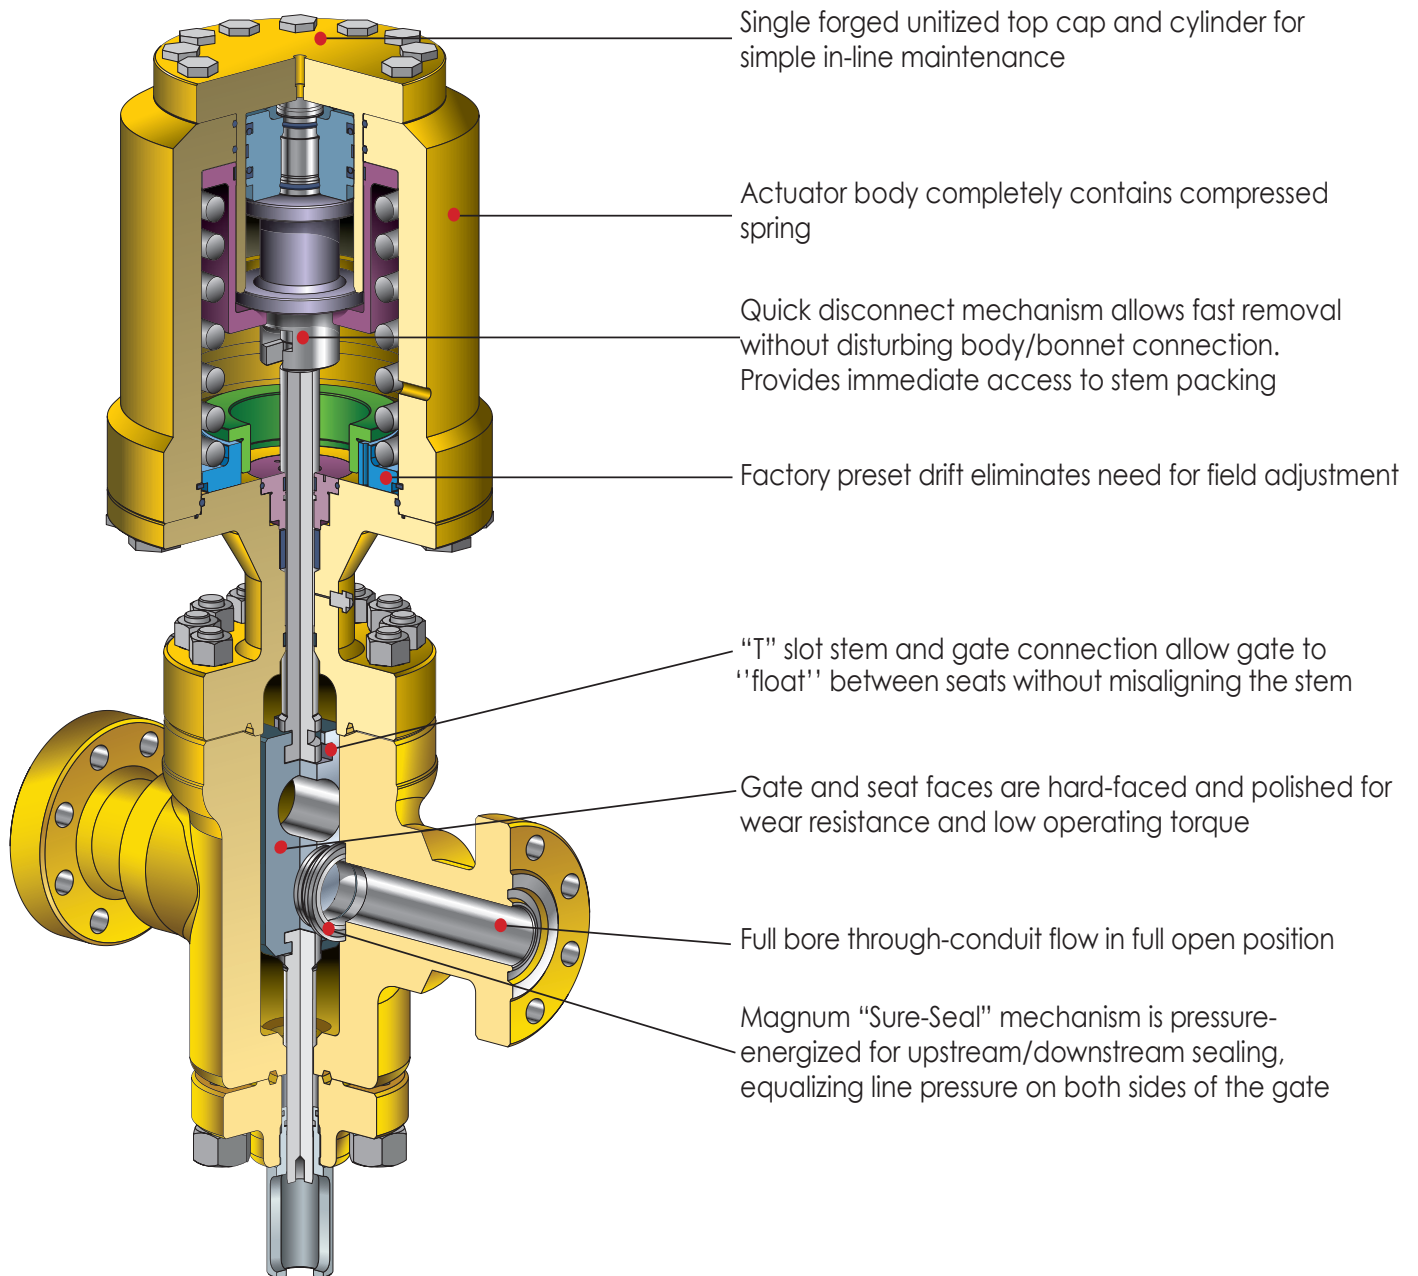

WOM's Other Dependable Valves

Model 500 Gate Valve

Features and Benefits

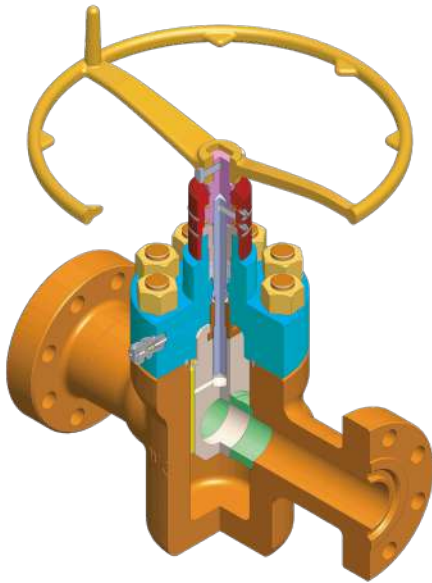

Model 500 Gate Valve


- Available in sizes 1-13/16" to 7-1/16"
- Working pressure ratings from 3,000 psi-15,000 psi
- Forged body and bonnet for the highest mechanical integrity
- Bi-directional sealing, seat to Body and Gate to Seat
- Grease injection fitting located in bonnet, eliminating body penetration
- Bearing cap grease fitting allows positive bearing lubrication
- The unique Wedge Guide design protects the Seat seal from damage and exposure to well pressure
- Body pocket Seat sealing area is protected from foreign particles entering and damaging the area
- Seat Assembly is locked in place providing a perfect downstream seal.
- Stem metal-to-metal backseat with Bonnet to isolate stem packing and allows stem packing to be replaced while valve is under pressure

Check Valves


Designed for the prevention of back flow in high pressure and/or high temperature mud lines, choke & kill manifolds, Christmas trees injection and kill lines.

Features and Benefits

- Available in sizes 1-13/16" through 4-1/16" (Larger sizes available upon request)
- Available in working pressure ratings of 3,000-20,000 psi
- Check Valves can be configured with flanged, butt weld, hub type, or a combination of end connections to suit customer's specifications.

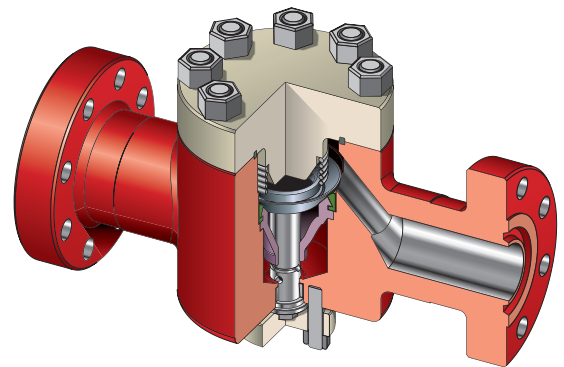

Standard Type "R" Check Valve

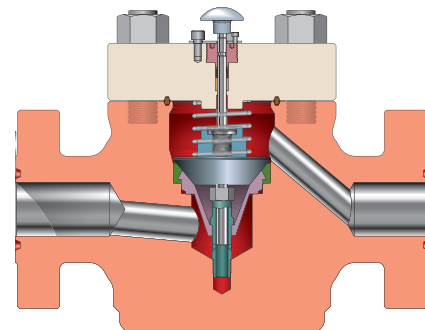


Lock-Open Type Check Valve



WOM's Other Dependable Valves

Model 600 Mud Valve

The Model 600 Mud Valve was designed for corrosive CO₂ injection and waterflood applications in the enhanced oil recovery market. It is commonly used for applications such as high pressure mixing lines, standpipe manifolds, wellheads, production manifolds and production gathering systems.

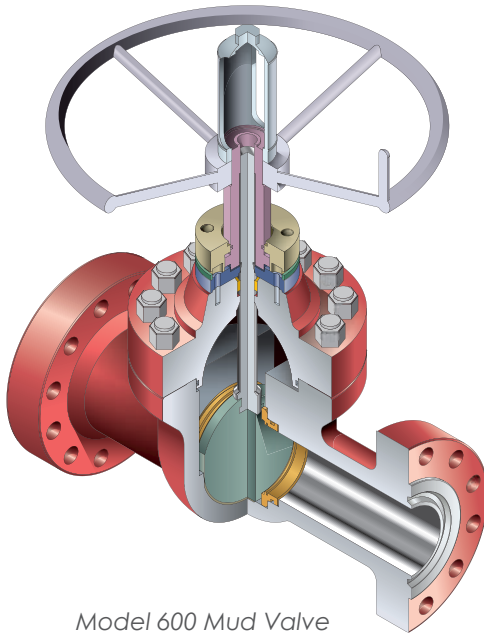

Model 600 Mud Valve

Features and Benefits

- Available in sizes 1-13/16" - 5-1/8"
- Available in working pressures from 5,000 psi and 7,500 psi
- Floating slab gate design
- Heavy duty roller bearings
- Seat assembly engineered with "lock shell" ensures accurate seat alignment
- Available with threaded, welded and flanged end connections
- Rising stem design with visual position indicator lens
- Replaceable stem packing





WORLDWIDE LOCATIONS

● **Worldwide Oilfield Machine, Inc.**

Headquarters/ U.S.A
11809 Canemont Street
Houston, Texas 77035 USA
Phone: +1 (713) 729-9200
Fax: +1 (713) 729-7321

● **Worldwide Oilfield Machine, Inc.**

5800 Cunningham
Houston, Texas 77041 USA
Phone: +1 (713) 937-0795
Fax: +1 (713) 937-8574

● **Worldwide Oilfield Machine, Inc.**

11625 Fairmont St.
Houston, Texas 77035 USA
Phone: +1 (713) 721-5200
Fax: +1 (713) 721-5205

● **Worldwide Oilfield Machine - Subsea**

11400 Tanner Rd.
Houston, TX 77041
Phone: +1 (713) 937-8323
Fax: +1 (713) 937-8574

● **Worldwide Oilfield Machine, Inc**

4707 SCR 1210
Midland, Texas 79706-305349
Phone: + (832) 908-4154

● **Worldwide Oilfield Machine Ltd. - UK**

7 St Machar Road Aberdeen
AB24 2UU Scotland, UK
Phone: +44 (01224) 484400
Fax: +44 (01224) 489740

● **Worldwide Oilfield Machine Pvt. Ltd - India**

Gat No. 778, at Post Velu
Pune Satara Rd.
Tal. Bhor, Dist. Pune 412 205. India
Phone 1: +91-8308210300
Phone 2: +91-8308215300

● **Worldwide Oilfield Machine, M.E. - U.A.E**

Jebel Ali Free Zone (JAFZA) South,
Plot# S61302, Near Gate#12, P.O. Box: 32478
Dubai (UAE)
Phone: +971-4 81 63 600
Fax: +971-4 81 63 601



● **PT Worldwide Oilfield Machine - Indonesia**
#11-08 One Pacific Place
Sudirman Central Business District
Jl. Jenderal Sudirman Kav. 52-53, Jakarta 12190
Phone: +65 6690 1792

● **WOM Brazil LTDA**
Rua Lady Esteves da Conceição 119
Macaé, RJ, 27933-420, BRAZIL
Phone: +55 22 3081-3500

● **Worldwide Oilfield Machine, Inc.- Turkmenistan**
Yimpash Business Centre
Turkmenbashi Shayoly 54
Office #308 3rd Floor
Ashgabat –Turkmenistan 744000
Phone 1: +99-365 820130
Phone 2: +99-365 309757

● **Magnum Technology Center**
Plot # S61301, Jebel Ali Free zone (South)
Dubai (UAE)
Phone: +971-4 81 08 600
Fax: +971-4 81 08 601

● **Worldwide Oilfield Machine - Korea**
#1012, 481-10, Byucksan Digital Vally-II,
Gasandong, GumchonGu,
Seoul, Korea 153-803
Phone: +82 2 854 6806

● **Worldwide Oilfield Machine Asia Pacific Pte. Ltd.**
- Singapore
17 Gul Way
Singapore 629194
Phone: +65 6690 1700
Fax: +65 6560 3859

WORLDWIDE SERVICE CENTERS

- | | |
|-----------------------|----------------|
| ● CANADA | ● EGYPT |
| ● MEXICO | ● OMAN |
| ● BRAZIL | ● KUWAIT |
| ● ARGENTINA | ● MYANMAR |
| ● TRINIDAD AND TOBAGO | ● CHINA |
| ● NORWAY | ● JAPAN |
| ● FRANCE | ● KUALA LUMPUR |
| ● ALGERIA | ● AUSTRALIA |



WOM proudly celebrates 40 years of providing the oil & gas industry with meticulously designed, well-engineered pressure and flow control equipment. WOM looks forward to continuing to make a positive impact on the process of safely extracting one of the world's most precious resources. We are honored to work with the businesses that have trusted our commitment to excellence and appreciate each member of our group that has contributed to our success.



WORLDWIDE OILFIELD MACHINE



VALVES & CONTROLS
A WOM group company



Magnum Technology Center
A WOM Group Company

We are Worldwide Oilfield Machine (WOM) - a global company pioneering Flow Control Solutions for the Surface & Subsea sectors of the oil & gas industry. Headquartered in Houston, Texas, we have manufacturing facilities, engineering centers, sales offices and assembly/testing workshops all over the world.

Our strength is our robust infrastructure that allows us complete control over quality, costs and delivery. With more than 20 patents and noted accreditations, our very own R&D facilities and 24x7 service centers across the globe we have the required capabilities & resources to deliver all your manufacturing needs for the industry.

www.womgroup.com



facebook.com/womglobalgroup
instagram.com/womglobalgroup
twitter.com/womglobalgroup
linkedin.com/company/worldwideoilfieldmachine