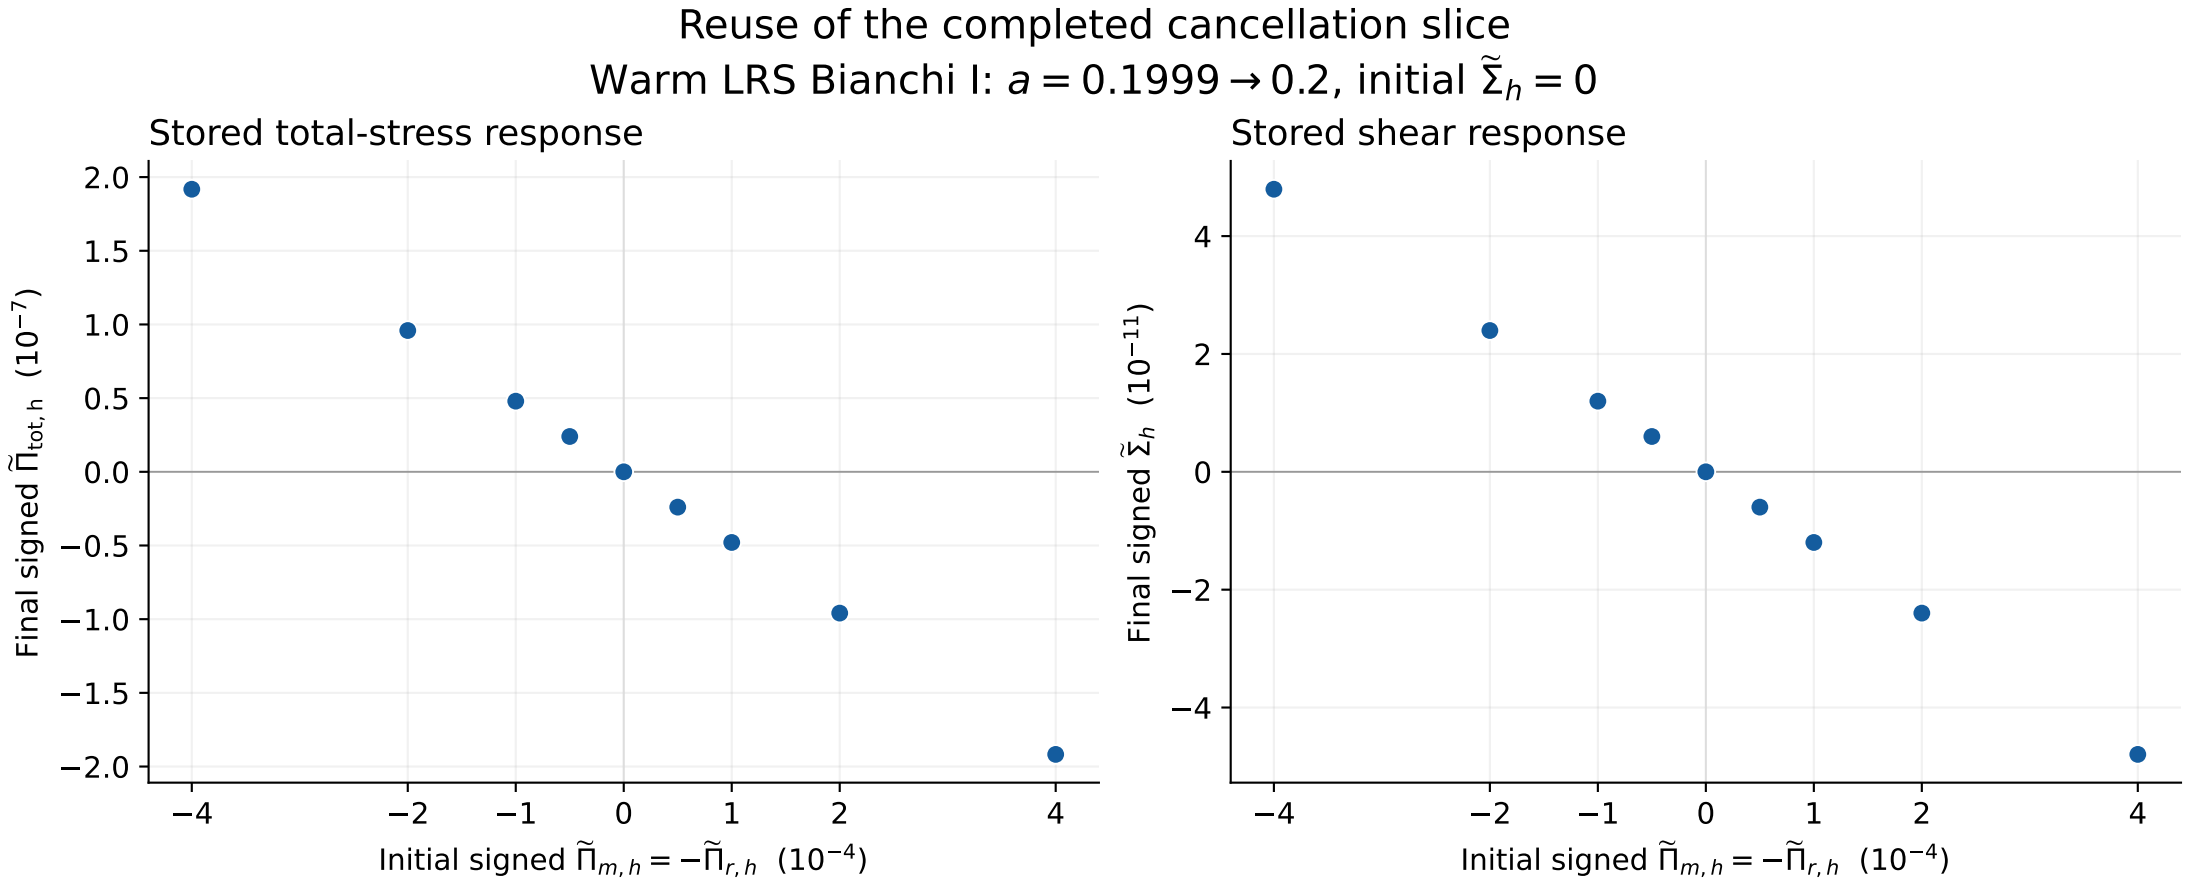
Reuse of the completed cancellation slice
Warm LRS Bianchi I: $a = 0.1999 \to 0.2$, initial $\widetilde{\Sigma}_h = 0$
Stored total-stress response
Stored shear response
Final signed $\widetilde{\Pi}_{\mathrm{tot},h}$ (10^{-7})
Final signed $\widetilde{\Sigma}_h$ (10^{-11})
Initial signed $\widetilde{\Pi}_{m,h} = -\widetilde{\Pi}_{r,h}$ (10^{-4})
Initial signed $\widetilde{\Pi}_{m,h} = -\widetilde{\Pi}_{r,h}$ (10^{-4})
9 stored endpoints from split729; markers are actual samples, with no interpolation.
Source and output pins verified; no new trajectory integration for this figure.