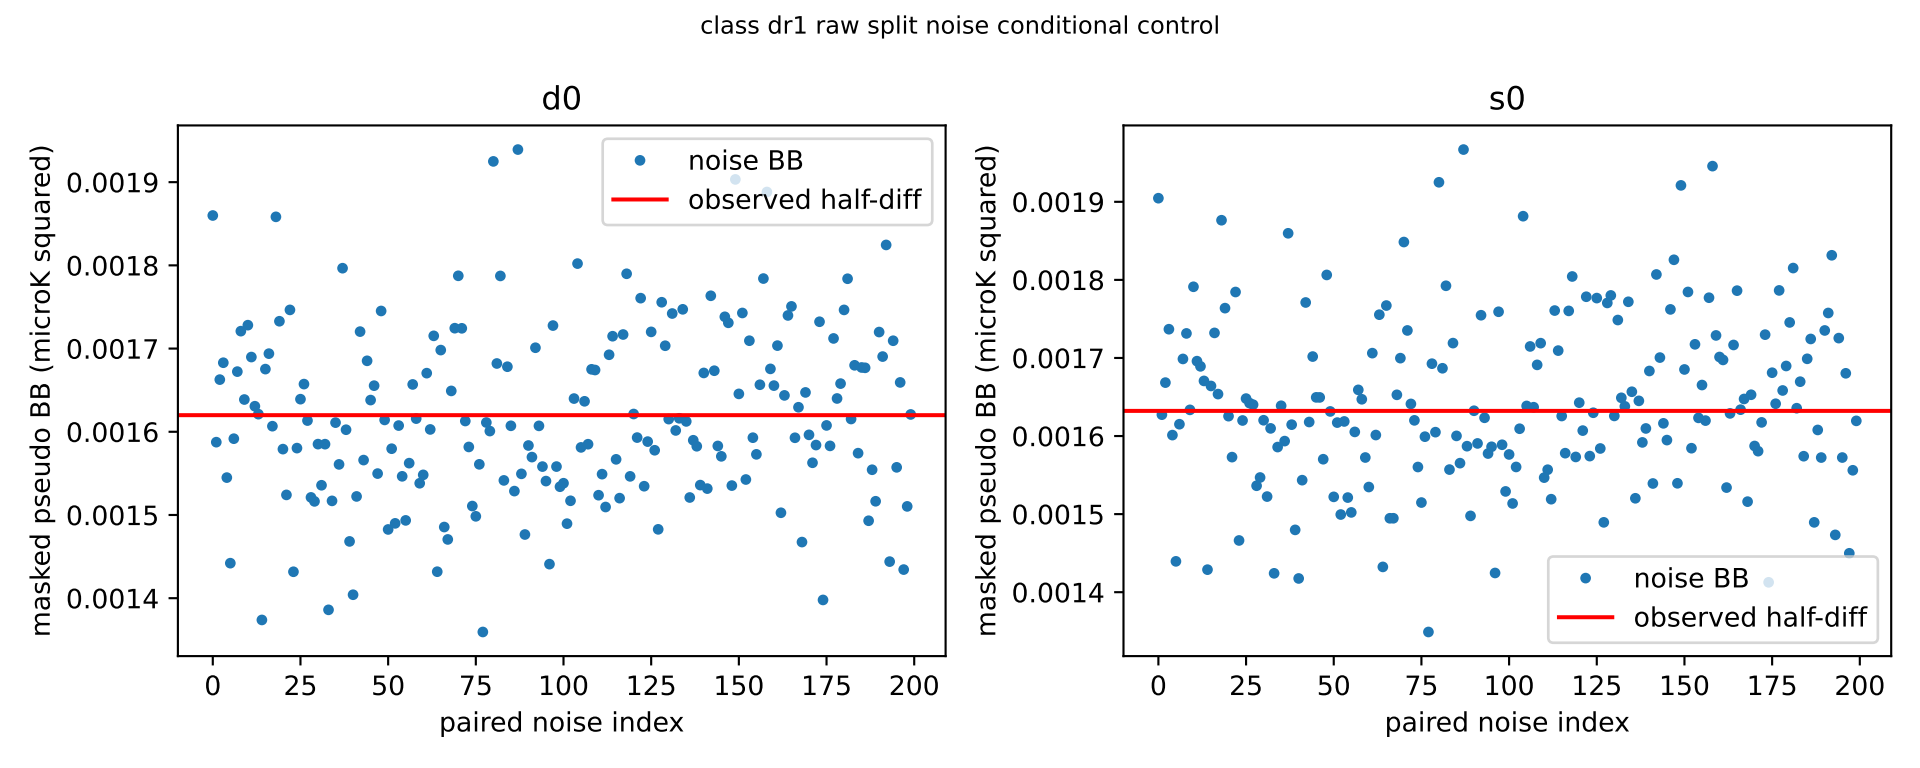
class dr1 raw split noise conditional control
d0
s0
noise BB
observed half-diff
masked pseudo BB (microK squared)
paired noise index
0.0014
0.0015
0.0016
0.0017
0.0018
0.0019
0
25
50
75
100
125
150
175
200