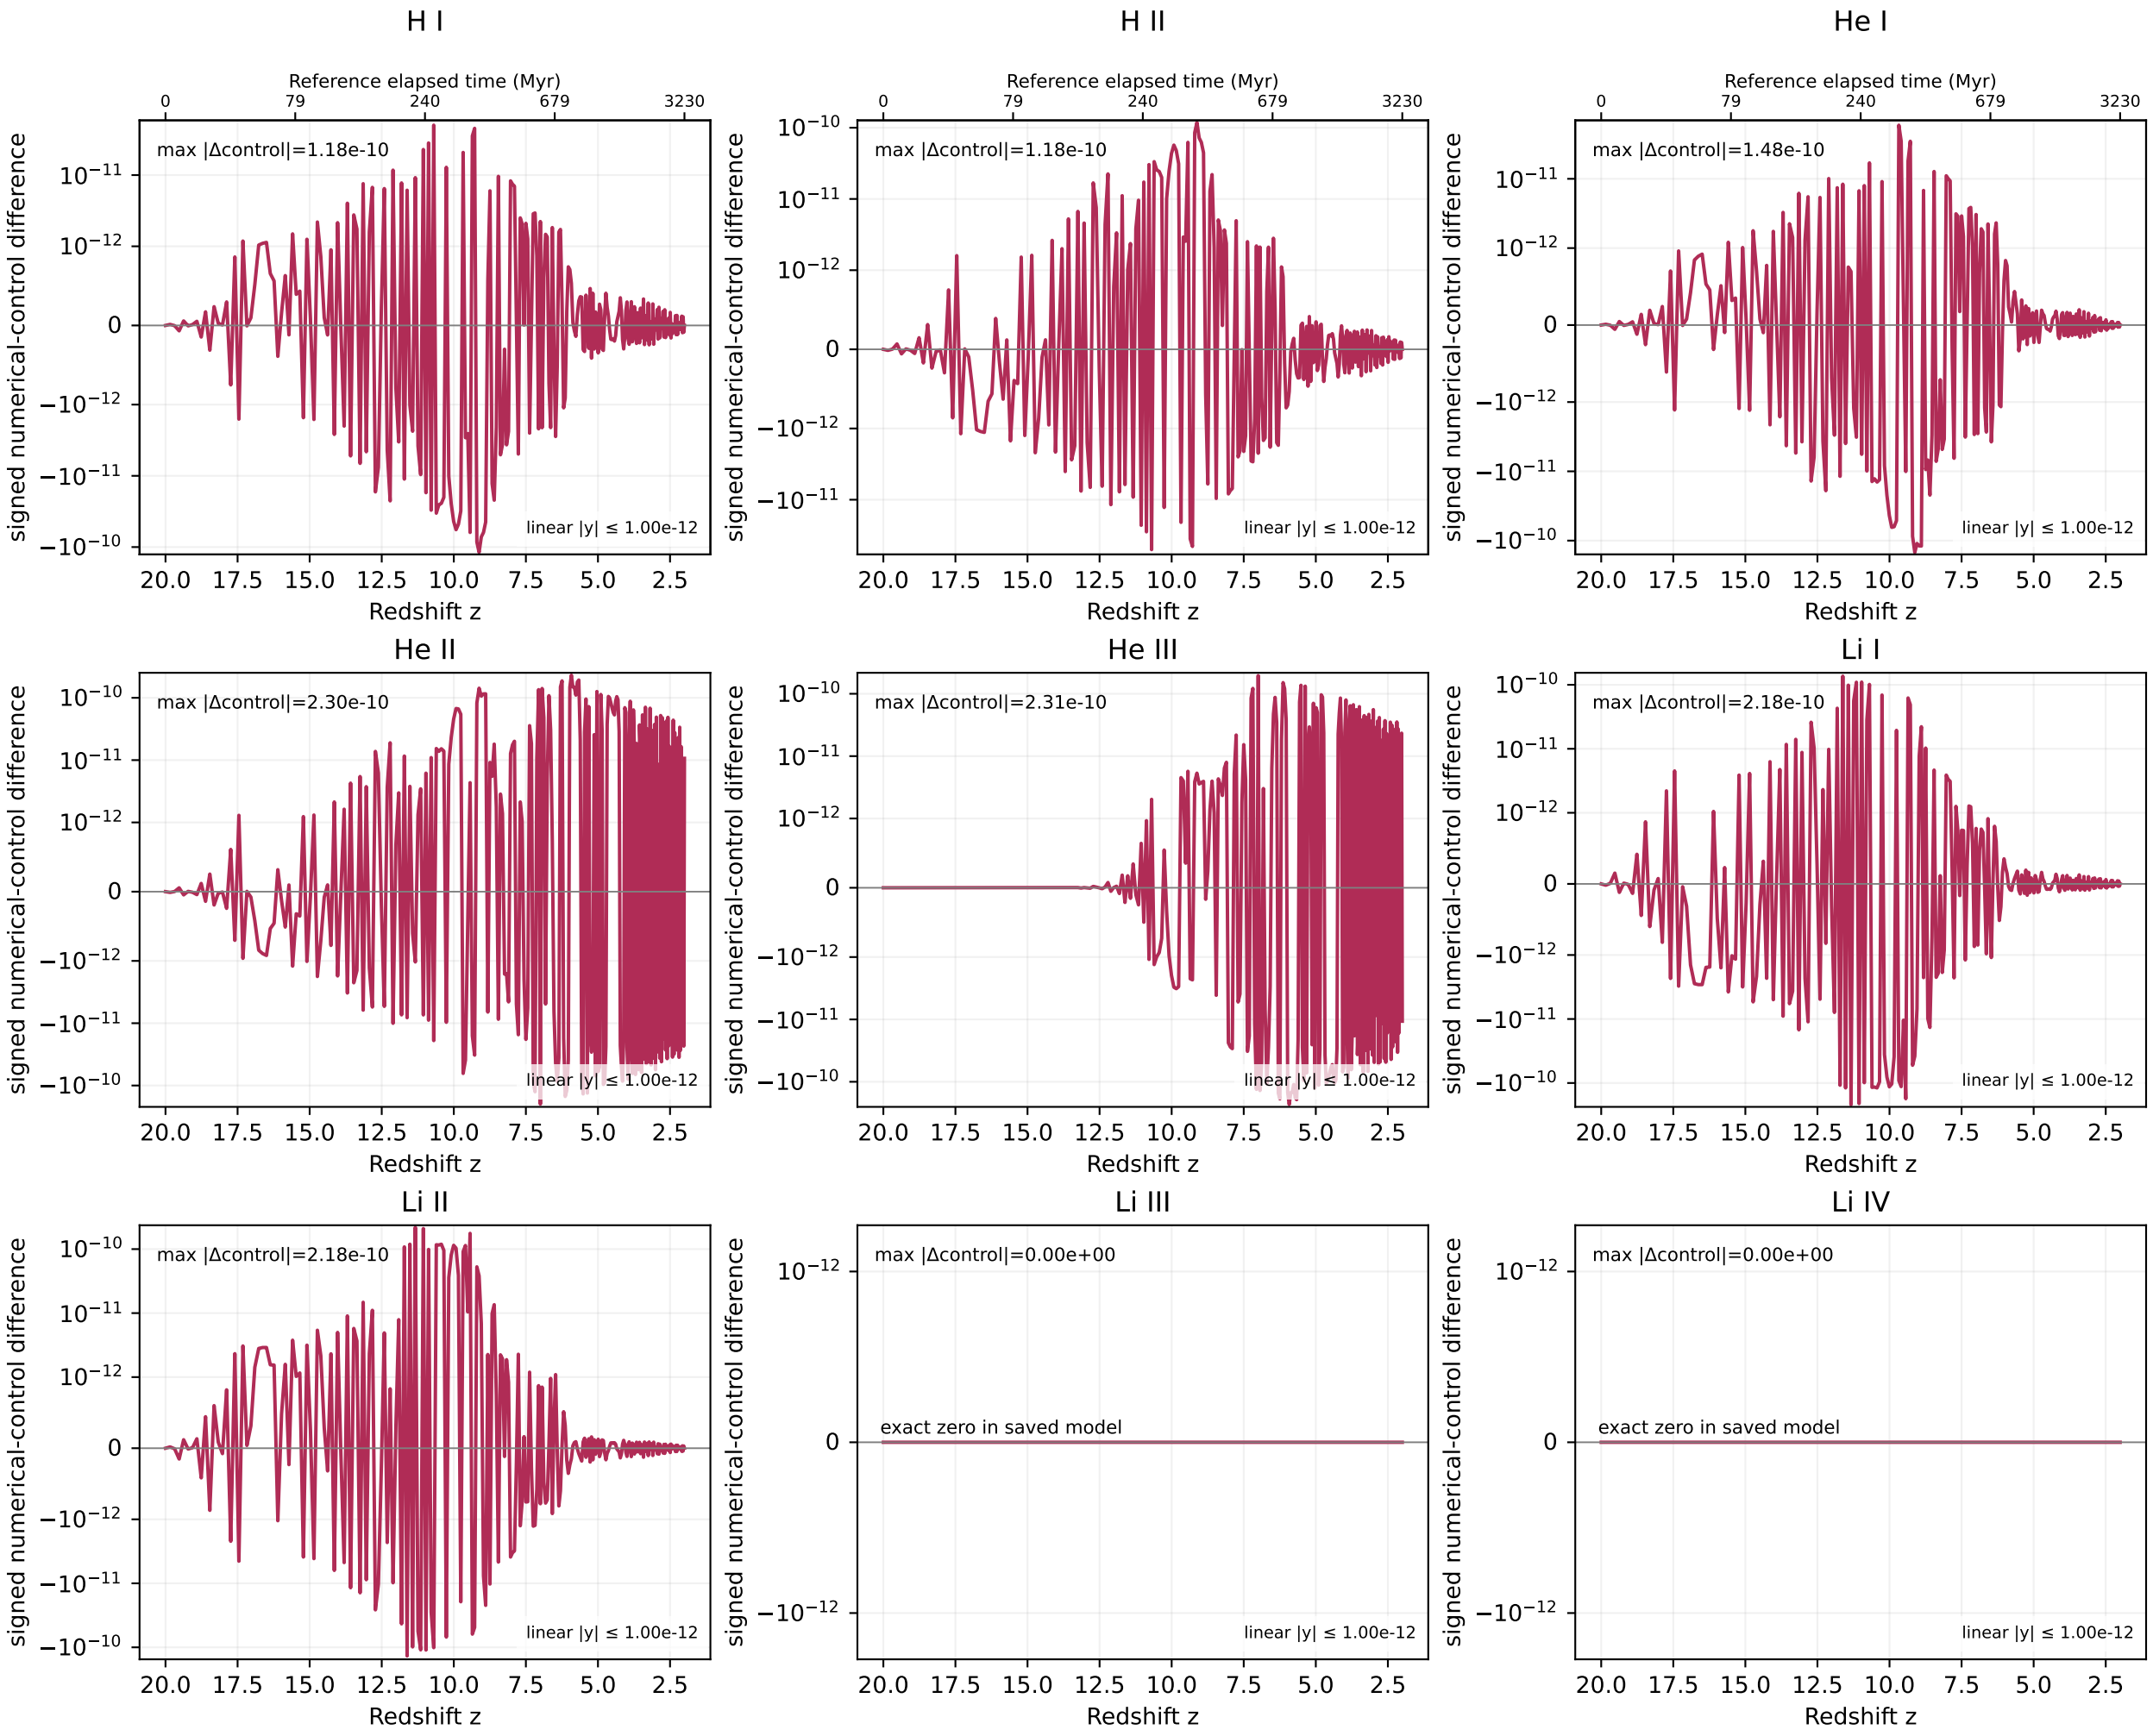New matched semi-relativistic family: f_m=0.3, m/Tref=3 — strongest case L16 vs tighter L24 control
Matched-hot-anchor peak response 5.455e-06; maximum observed control discrepancy 2.313e-10; control scale is not a certified error bound
Auxiliary axis uses reference clock: strongPiM_m3_f0.3_Pi0_L16; other cases have different z(t).