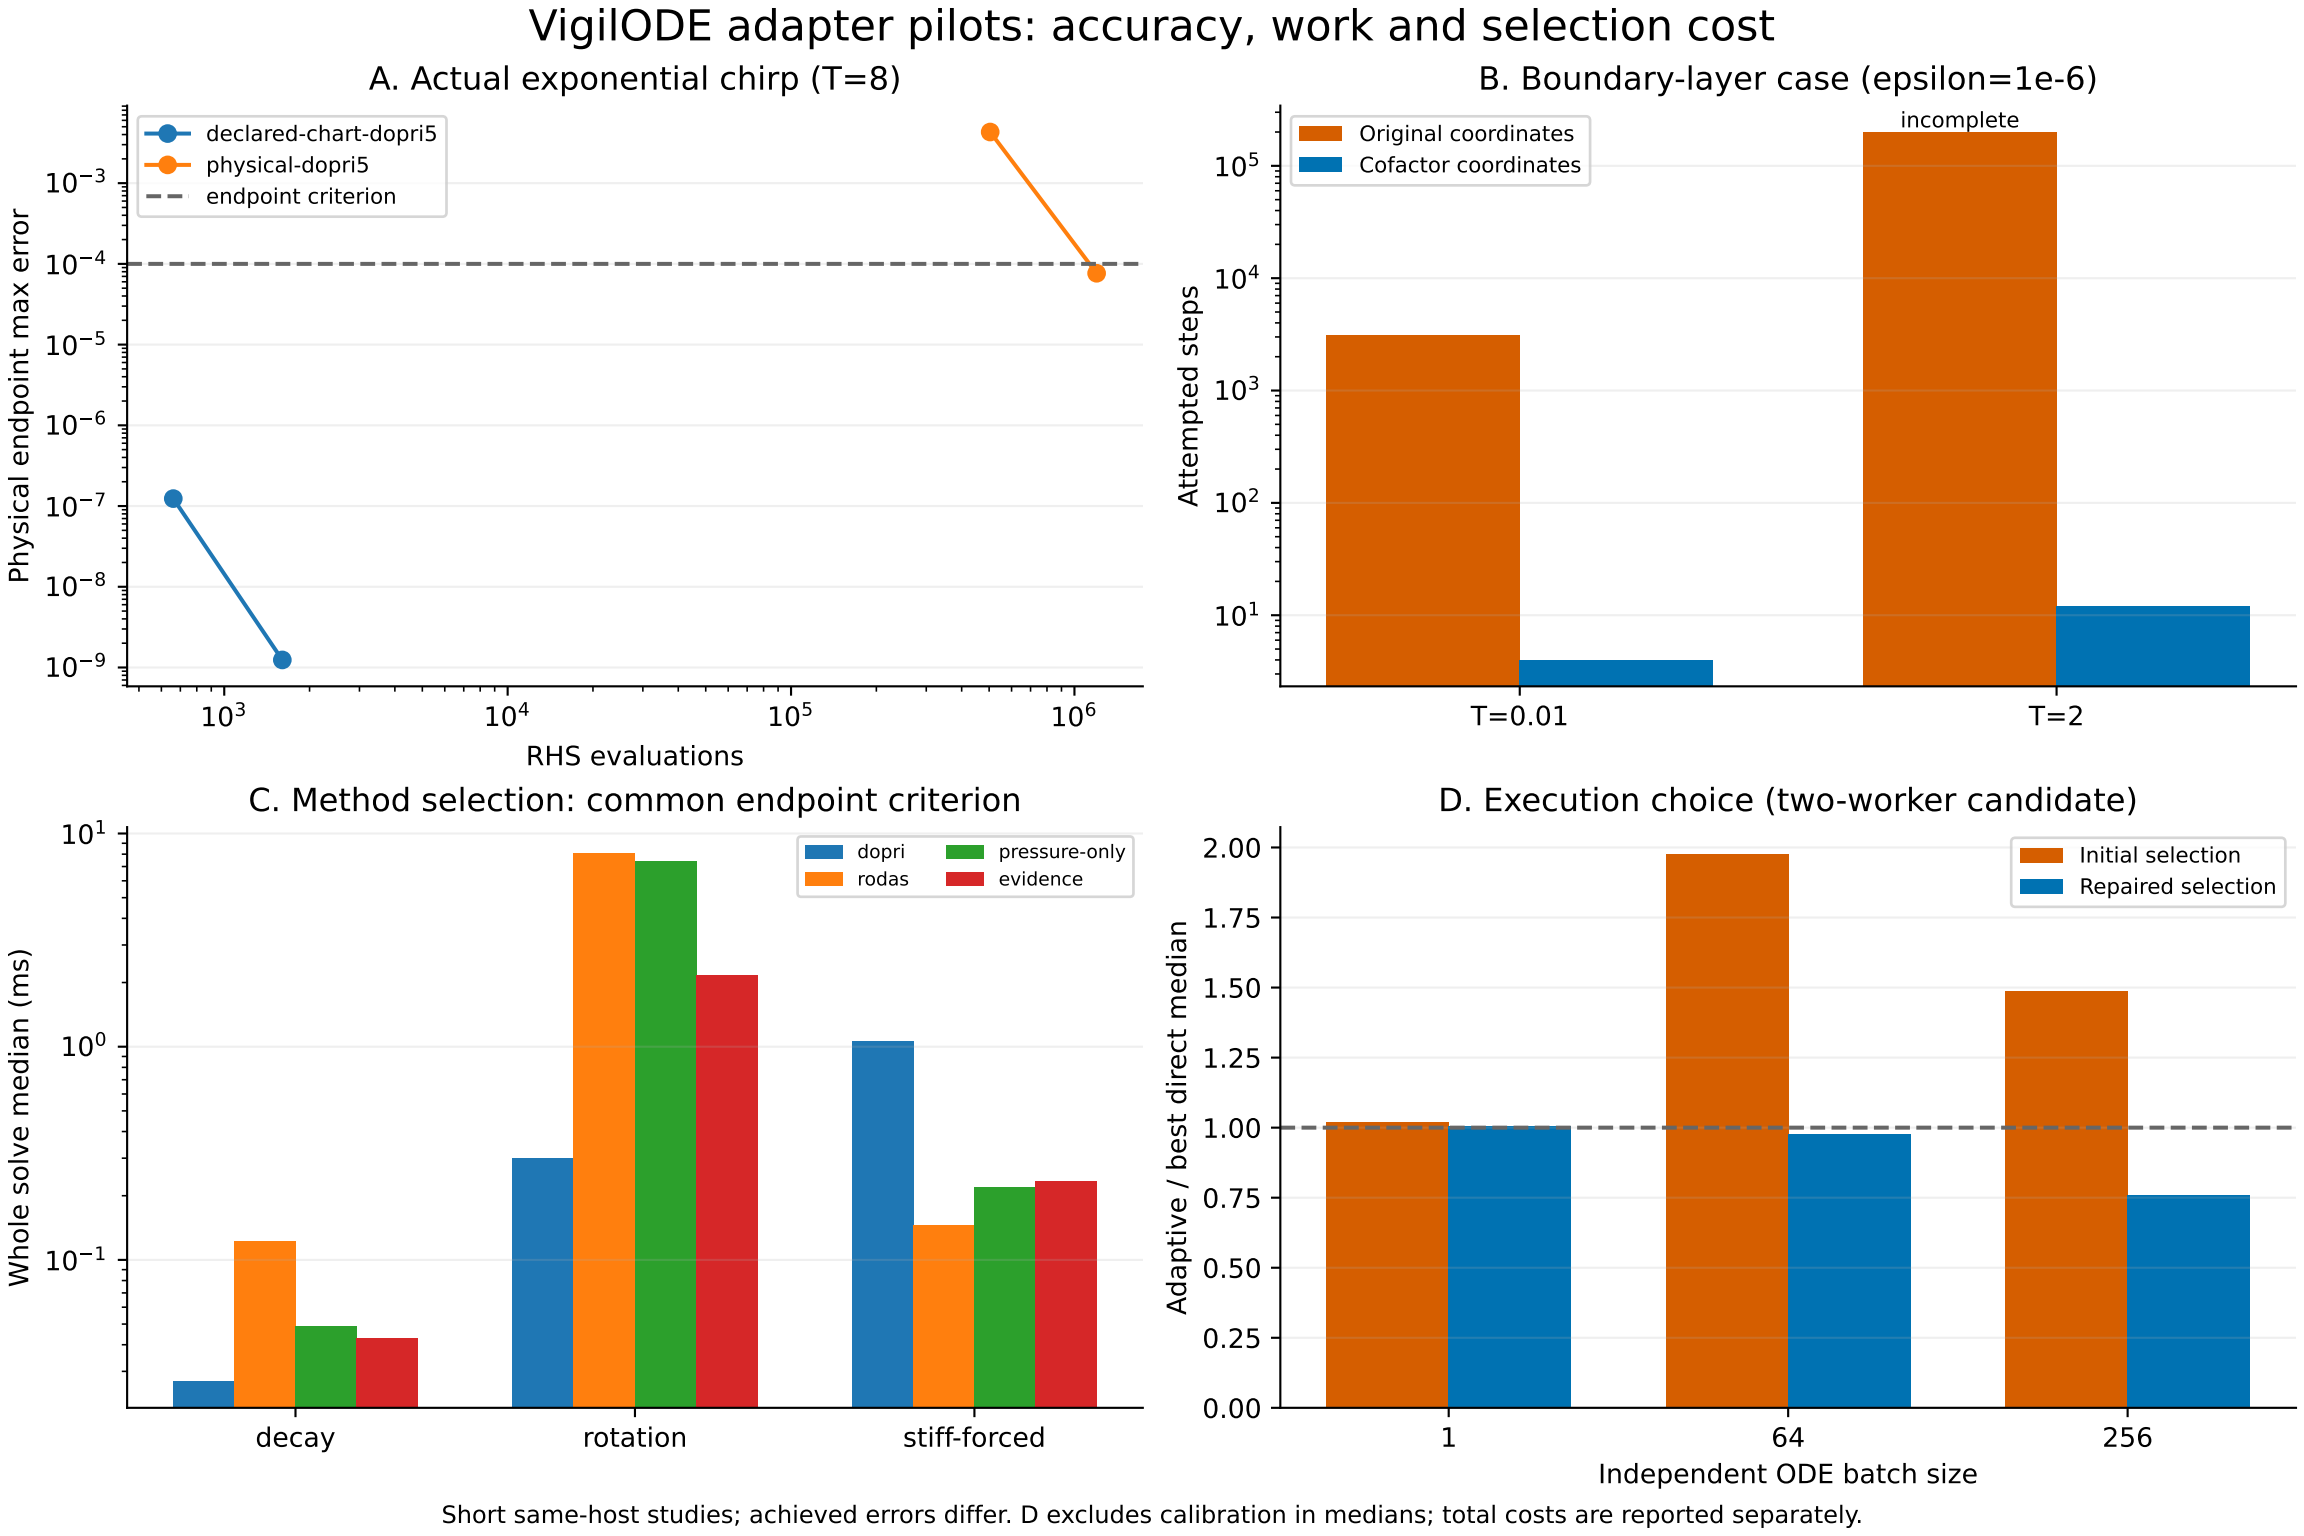
VigilODE adapter pilots: accuracy, work and selection cost
A. Actual exponential chirp (T=8)
declared-chart-dopri5
physical-dopri5
endpoint criterion
Physical endpoint max error
RHS evaluations
B. Boundary-layer case (epsilon=1e-6)
Original coordinates
Cofactor coordinates
incomplete
Attempted steps
T=0.01
T=2
C. Method selection: common endpoint criterion
dopri
rodas
pressure-only
evidence
Whole solve median (ms)
decay
rotation
stiff-forced
D. Execution choice (two-worker candidate)
Initial selection
Repaired selection
Adaptive / best direct median
Independent ODE batch size
Short same-host studies; achieved errors differ. D excludes calibration in medians; total costs are reported separately.