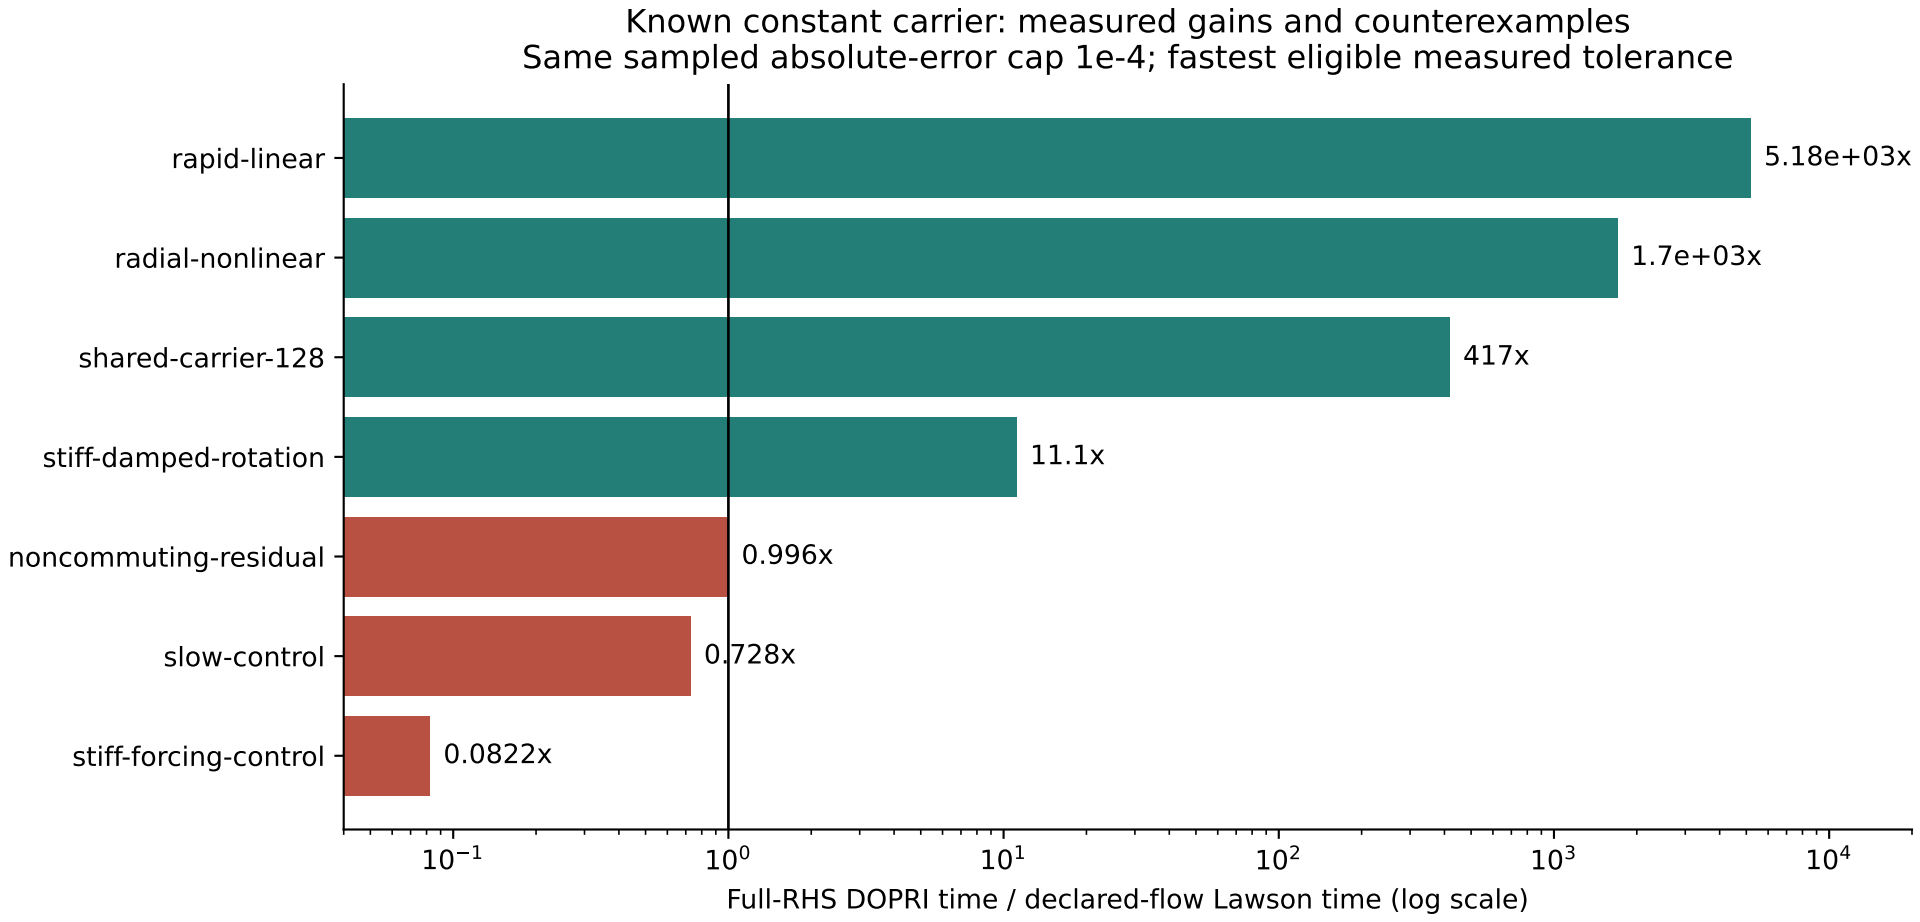
Known constant carrier: measured gains and counterexamples
Same sampled absolute-error cap 1e-4; fastest eligible measured tolerance
rapid-linear
radial-nonlinear
shared-carrier-128
stiff-damped-rotation
noncommuting-residual
slow-control
stiff-forcing-control
5.18e+03x
1.7e+03x
417x
11.1x
0.996x
0.728x
0.0822x
10^{-1}
10^{0}
10^{1}
10^{2}
10^{3}
10^{4}
Full-RHS DOPRI time / declared-flow Lawson time (log scale)