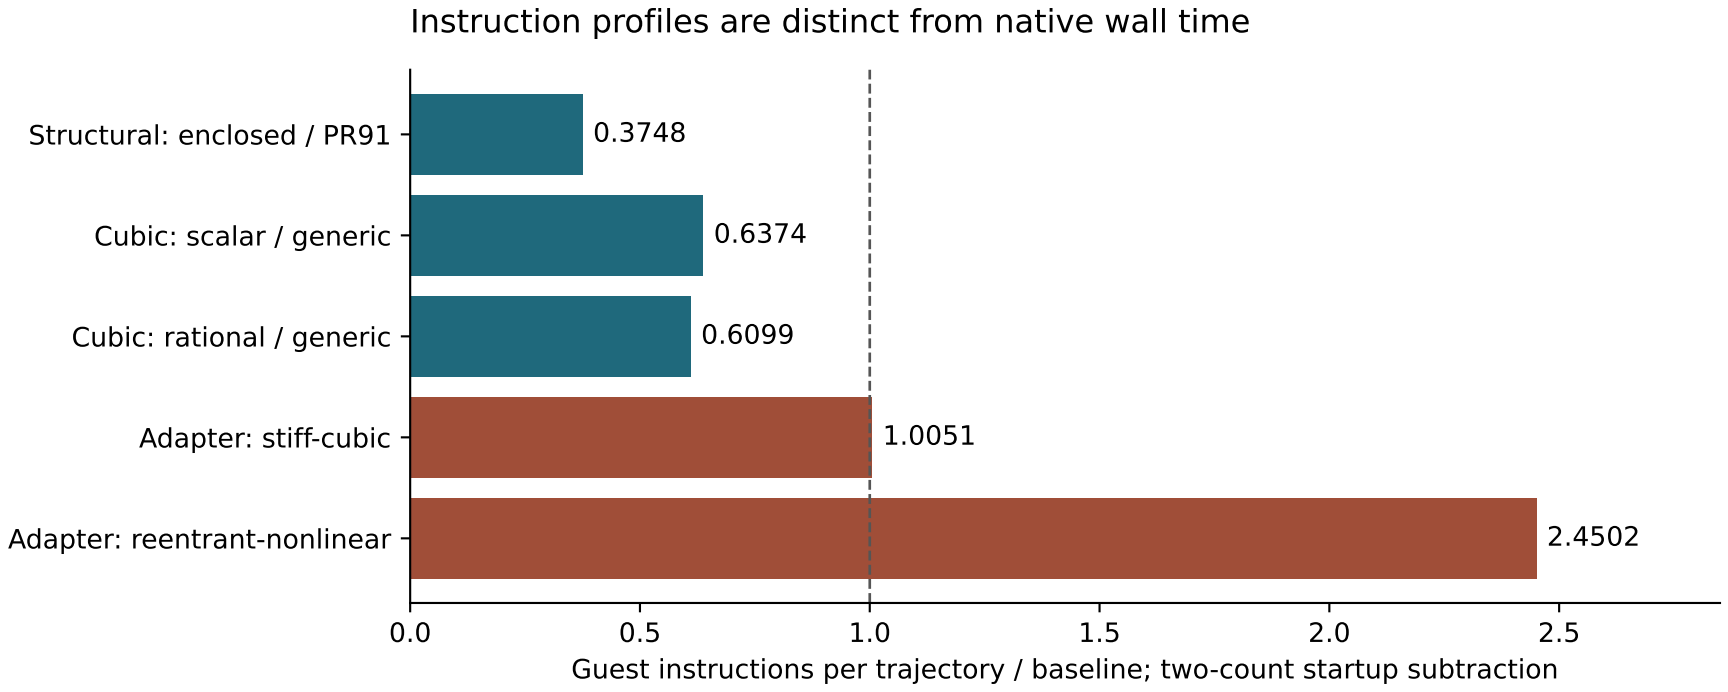
Instruction profiles are distinct from native wall time
Structural: enclosed / PR91
Cubic: scalar / generic
Cubic: rational / generic
Adapter: stiff-cubic
Adapter: reentrant-nonlinear
0.3748
0.6374
0.6099
1.0051
2.4502
0.0
0.5
1.0
1.5
2.0
2.5
Guest instructions per trajectory / baseline; two-count startup subtraction