Quantifying nitrogen oxides and ammonia via frequency modulation in gas sensors

- DRAFT

Kvantifiering av kväveoxider och ammoniak via frekvensmodulering i gassensorer

Marcos Freitas Mourão dos Santos

Supervisor : Annika Tillander Examiner : José M. Peña

 ${\bf External\ supervisor:\ Mike\ Andersson}$



Upphovsrätt

Detta dokument hålls tillgängligt på Internet - eller dess framtida ersättare - under 25 år från publiceringsdatum under förutsättning att inga extraordinära omständigheter uppstår.

Tillgång till dokumentet innebär tillstånd för var och en att läsa, ladda ner, skriva ut enstaka kopior för enskilt bruk och att använda det oförändrat för ickekommersiell forskning och för undervisning. Överföring av upphovsrätten vid en senare tidpunkt kan inte upphäva detta tillstånd. All annan användning av dokumentet kräver upphovsmannens medgivande. För att garantera äktheten, säkerheten och tillgängligheten finns lösningar av teknisk och administrativ art.

Upphovsmannens ideella rätt innefattar rätt att bli nämnd som upphovsman i den omfattning som god sed kräver vid användning av dokumentet på ovan beskrivna sätt samt skydd mot att dokumentet ändras eller presenteras i sådan form eller i sådant sammanhang som är kränkande för upphovsmannens litterära eller konstnärliga anseende eller egenart.

För ytterligare information om Linköping University Electronic Press se förlagets hemsida http://www.ep.liu.se/.

Copyright

The publishers will keep this document online on the Internet - or its possible replacement - for a period of 25 years starting from the date of publication barring exceptional circumstances.

The online availability of the document implies permanent permission for anyone to read, to download, or to print out single copies for his/hers own use and to use it unchanged for non-commercial research and educational purpose. Subsequent transfers of copyright cannot revoke this permission. All other uses of the document are conditional upon the consent of the copyright owner. The publisher has taken technical and administrative measures to assure authenticity, security and accessibility.

According to intellectual property law the author has the right to be mentioned when his/her work is accessed as described above and to be protected against infringement.

For additional information about the Linköping University Electronic Press and its procedures for publication and for assurance of document integrity, please refer to its www home page: http://www.ep.liu.se/.

© Marcos Freitas Mourão dos Santos

Abstract

The abstract resides in file Abstract.tex. Here you should write a short summary of your work.

Acknowledgments

Thank you for reading my draft! :)

Contents

ΑŁ	stract		iii
Ac	know	ledgments	iv
Co	ntent	s	v
Lis	t of F	igures	vii
Lis	t of T	ables	viii
Lis	st of a	cronyms and abbreviations	ix
1	Intro	oduction	1
	1.1	Motivation	1
	1.2	Aim	2
	1.3	Research questions	2
2	The	ory	3
	2.1	Linear Regression	3
	2.2	Principal Component Regression	3
	2.3	Partial Least Squares Regression	5
	2.4	Ridge Regression	6
3	Data	1	7
	3.1	Data acquisition	7
	3.2	Raw data	8
	3.3	Secondary data	9
4	Met	hod	10
5	Resu	ılts	11
6	Disc	ussion	12
	6.1	Results	12
	6.2	Method	12
	63	The work in a wider context	12

7	Conclusion	13
Bik	oliography	14
8	Appendix	16
	8.1 Appendix A: Data acquisition time stamps	16

List of Figures

3.1	Schema of the data acquisition process	7
3.2	An example of row sensor response	8
3.3	Feature measurements times per cycle	8
8.1	Data acquisition timestamps.	17

List of Tables

3.1	Data acquisition details	9
	<u>.</u>	

List of acronyms and abbreviations

```
AC Alternating Current. 2

GBCO Gate Bias Cycled Operation. 2

Hz Hertz. 8

mA miliamperes. 7

NIPALS Nonlinear Iterative Partial Least Squares. 4, 5

PC Principal Component. 4

PCA Principal Components Analysis. 3, 4

PCR Principal Components Regression. 3, 4, 5

PLS Partial Least Squares. 5

PLSR Partial Least Squares Regression. 2, 5

ppm parts per million. 7

SAS Sensor and Actuator Systems. 7

SCR Selective Catalytic Reduction. 1, 2

SiC-FET Silicon Carbide Field Effect Transistor. 2, 7

TCO Temperature Cycled Operation. 2
```



Introduction

1.1 Motivation

Nitric Oxide (NO) and Nitrogen Dioxide (NO₂), commonly referred together as NO_x , are hazardous gases to the environment and to humans. Its main sources are combustion processes in transportation, and industrial processes such as (but not limited to) auto mobiles, trucks, boats, industrial boilers, turbines, etc. [12].

 NO_x exposure to humans can cause respiratory illnesses such bronchitis, emphysema and can worsen heart disease [4]. Environmentally, NO_x are deemed precursors of adverse phenomena such as smog, acid rain, and the depletion of ozone (O_3) [1]. It is of high interest, therefore, to reduce NO_x emissions.

One well studied and successful method of reducing emissions is Selective Catalytic Reduction (SCR), which consists in the reduction of NO_x by ammonia (NH_3) into nitrogen gas (N_2) and water (H_2O) [6], both harmless components. The process is based in the following reactions [6]:

•
$$4 \text{ NH}_3 + 4 \text{ NO} + \text{O}_2 \longrightarrow 4 \text{ N}_2 + 6 \text{ H}_2 \text{O}$$

•
$$2 \text{ NH}_3 + \text{NO} + \text{NO}_2 \longrightarrow 2 \text{ N}_2 + 3 \text{ H}_2 \text{O}$$

•
$$8 \text{ NH}_3 + 6 \text{ NO}_2 \longrightarrow 7 \text{ N}_2 + 12 \text{ H}_2\text{O}$$

One key element in these reactions, however, is the amount of ammonia dosed into the SCR systems. Ammonia itself is hazardous to humans, causing skin and respiratory irritation, among other illnesses [2]. More importantly, ammonia is one of the main sources of nitrogen pollution and it has direct negative impact on biodiversity via nitrogen deposition in soil and water [8]. Hence it is also desired to keep ammonia emissions to a minimum. Too much ammonia in the SCR catalyst will guarantee NO_x reduction at the expense of undesired ammonia emissions. Concurrently, too little ammonia will

impede SCR to occur properly, beating the purpose of the catalyst and as a consequence, undesired NO_x emissions.

To monitor gasses concentrations, chemical sensors are deployed, one of which is the Silicon Carbide Field Effect Transistor (SiC-FET). The identification and quantification of gasses is normally achieved through multiple sensor in so called sensor arrays. Ideally each sensor in the array needs to have different responses to different compounds [3]. The deployment of multiple sensors, on the other hand, proves itself cumbersome due to the increased chances of failure, and decalibration of the system should one or multiple sensors be replaced [3].

One solution to this problem is the cycled operation of one single sensor, referred as virtual multisensor [3]. By cycling the working point parameters of the sensor, different substances react differently in the sensor surface, which in turn produces different responses. Temperature Cycled Operation (TCO), Gate Bias Cycled Operation (GBCO), and the combination of the two have been proven to increase selectivity of SiC-FET sensors [3].

TCO, in contrast with a constant temperature evaluation, produces unique transient sensor responses, i.e. each gas mixture yields a slightly different sensor output. This unique gas signature increases selectivity [5]. Additionally, the high temperatures reached in these cycles help in the cleansing of the sensor surface, preparing it for the new mixtures to come.

Frequency modulation tries to achieve the same goal: avoid steady state responses in exchange of unique signatures that could help identify/quantify the gasses at hand. It consists on operating the sensor in Alternating Current (AC). One then can regulate the frequency of this operation and create cycles of different frequencies, similar to what is done in TCO. This is equivalent to GBCO, but with more frequency changes and achieving overall higher frequencies.


The main question is: given these set of unique sensor responses, how one can quantify the gasses that produced them? The answer lies in multivariate regression techniques. Partial Least Squares Regression (PLSR) has been used in chemometrics extensively and it has been proven to be good at this task [3] [13]. Other multivariate regression methods, naturally, can also be used. This is the aim of this thesis work, which is shown in the following section.

1.2 Aim

The aim of this thesis is to investigate different regression methods, namely: PLSR, Ridge Regression and (neural nets XXXX - TENTATIVE), and their fit to correctly quantify gas mixtures such NO_x and Ammonia subjected to sensor frequency modulation.

1.3 Research questions

- 1. Is it possible to achieve acceptable prediction levels for NO_x and Ammonia using frequency modulation?
- 2. Which method yields best predictions of gas concentrations?



Comment to teacher and opponents: I feel I should rewrite this section contextualized to the problem. Since i do not have the data yet, (although is far from perfect) I thought it was best to keep it "pure" and not long. What do you think? It is also kinda "hard" to write these math heavy derivations by paraphrasing (and citing ,of course) the original authors. Should I just transcribe the math down using quotes ""?

It is often the case that sensor data points are acquired in quick succession, which in turn leads to highly correlated features [3], which can result in high variance [7]. It is desired, then, to apply some feature selection before using the data in prediction models.

TODO: Add section on Linear Regressin to better introduce all other methods

TODO: Standardize notation. It is all over the place.

TODO: Give more details

TODO: complete PLSR and Ridge section

TODO: Perhaps do a separate, in depth section on Principal Components

2.1 Linear Regression

2.2 Principal Component Regression

The idea behind Principal Components Regression (PCR) is first to reveal more simple underlying structures in data [11] via Principal Components Analysis (PCA) and then performing linear regression on them. PCA aims to find linear combinations of the input variables in such a way that a few of those new, derived variables can explain most of the variability in the system [9].

The objective of PCA is find a matrix ${f P}$ such that the linear transformation

$$T = XP (2.1)$$

yields new variables $(t_1, t_2, ..., t_m)$ that are uncorrelated and arranged in decreasing order of variance . \mathbf{T} is named scores and \mathbf{P} Principal Component (PC) of \mathbf{X} [10]. Since the matrix \mathbf{T} is ordered, it follows that most of the variance on the data \mathbf{X} is captured by the first k-th PC [10]. This approximation of \mathbf{X} is defined in Equation 2.2:

$$T_{|\mathbf{k}} = \mathbf{X} \mathbf{P}_{|\mathbf{k}} \tag{2.2}$$

Finally, PCR is simply performing linear regression on $\mathbf{T}_{|\mathbf{k}}$ instead of X :

$$\mathbf{y} = \mathbf{T}_{|\mathbf{k}} \boldsymbol{\beta} + \epsilon \tag{2.3}$$

And the regression coefficients just as in linear regression:

$$\hat{\beta}^{PCR} = (\mathbf{T}_{lk}^{T} \mathbf{T}_{lk})^{-1} \mathbf{T}_{lk}^{T} \mathbf{y}$$
(2.4)

The Nonlinear Iterative Partial Least Squares (NIPALS) algorithm can also compute Principal Component and its scores [10] [14].

Algorithm 1: Nonlinear Iterative Partial Least Squares (NIPALS)

```
\begin{split} & \textbf{Result:} \ \mathsf{First} \ \mathsf{k} \ \mathsf{Principal} \ \mathsf{Components} \\ & \mathsf{i} = 1; \\ & \mathbf{X_i} = \mathbf{X}; \\ & \textbf{while} \ i < k \ \textbf{do} \\ & & | \ \mathsf{Choose} \ \mathbf{t_i} \ \mathsf{as} \ \mathsf{any} \ \mathsf{column} \ \mathsf{of} \ \mathbf{X_i}; \\ & & | \ \mathsf{Compute} \ \mathsf{loadings} \ \mathbf{p_i} = \frac{\mathbf{X_i^T t_i}}{\mathbf{t_i^T t_i}}; \\ & | \ \mathsf{Let} \ \mathbf{p_i} = \frac{\mathbf{p_i}}{\sqrt{\mathbf{p_i^T p_i}}}; \\ & | \ \mathsf{Compute} \ \mathsf{scores} \ \mathbf{t_i} = \frac{\mathbf{X_i p_i}}{\mathbf{p_i^T p_i}}; \\ & | \ \mathsf{until} \ \mathit{Until} \ \mathbf{t_i} \ \mathit{converges}; \\ & | \ \mathbf{X_{i+1}} = \mathbf{X_i} - \mathbf{t_i p_i^T}; \\ & | \ \mathit{i} \ \mathit{i+1}; \\ & | \ \mathsf{end} \end{split}
```

2.3 Partial Least Squares Regression

PLSR, much like PCR, also tries to reduce dimensionality via linear combinations of the inputs. In this technique, however, also takes into account the dependent variables y. One key advantage of PLSR is that it seeks axes with most variance (like PCR) and high correlation with the dependent variables [7].

The main idea can be described as decomposing both the design matrix X and response matrix Y as follows [10], similarly to what was done in Section 2.2:

$$X = TP^{T}$$
 (2.5)

$$Y = UQ^{T}$$
 (2.6)

Instead of simply running NIPALS on X and Y separately. PLSR uses information from Y to decompose X and *vice-versa* [10].

After finding the k partial least squares directions from the Algorithm 2 above, the score matrices T and U are found. The regression coefficients β^{PLS} are found by the relation [10]:

$$\mathbf{U} = \mathbf{T}\beta^{\mathsf{PLS}} \tag{2.7}$$

Finally, by the substitution of Equation 2.7 on 2.6 [10]:

$$\mathbf{Y} = \mathbf{X} \mathbf{P} \beta^{\mathsf{PLS}} \mathbf{Q}^{\mathbf{T}} \tag{2.8}$$


2.4 Ridge Regression

Another option is shrink regression coefficients via a penalty term. As stated on [7], "ridge coefficients minimize a penalized sum of squares", as shown on Equation 2.9 and Equation 2.10.

$$\hat{\beta}^{\text{ridge}} = \operatorname{argmin}_{\beta} \left\{ \sum_{i=1}^{N} (y_i - \beta_0 - \sum_{j=1}^{p} x_{ij} \beta_j)^2 + \lambda \sum_{j=1}^{p} \beta_j^2 \right\}$$
 (2.9)

Where $\lambda \geq 0$ is a parameter that controls strength of the penalization. This could also be written in matrix form:

$$\hat{\beta}^{\text{ridge}} = (\mathbf{X}^T \mathbf{X} + \lambda \mathbf{I})^{-1} \mathbf{X}^T \mathbf{y}$$
 (2.10)



3.1 Data acquisition

The data was acquired at the Sensor and Actuator Systems (SAS) laboratory at Linköping University. The experiment — as shown on Figure 3.1 — consisted of exposing different gas combinations to the SiC-FET sensor under a certain frequency cycle and recording its response, measured in miliamperes (mA). The is then used to extract secondary features, namely average and slope values from certain regions of the frequency cycle.

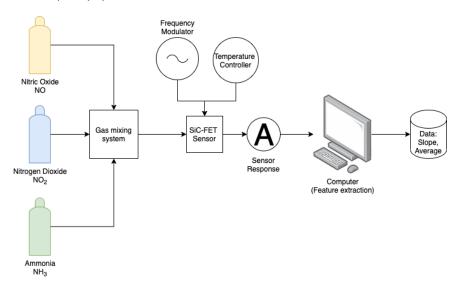


Figure 3.1: Schema of the data acquisition process.

In more detail, NO, NO_2 and NH_3 had five possible concentration values each: 10, 20, 40, 80 and 160 parts per million (ppm). The experiment was designed to encompass all possible combinations of these gasses, which totals to 125 different gas mixtures. Each feature was submitted to the same

frequency cycle five times. The cycle consists of 16 unique frequencies: 0.05, 0.1, 0.25, 0.5, 1, 2, 5, 10, 25, 50, 100, 200, 500, 1000, 2500 and 5000 Hertz (Hz). A typical raw sensor response for frequency modulation experiments is shown on Figure 3.1.

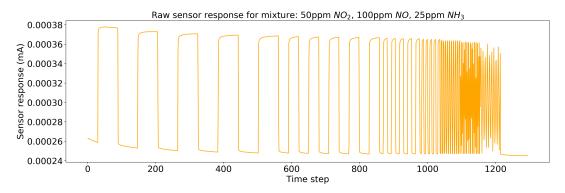


Figure 3.2: An example of row sensor response

For each frequency in each cycle, two slope and two average features were extracted. These measurements were taken during a 0.4 seconds window of time, alternating between slope and average as shown on Figure 3.1.

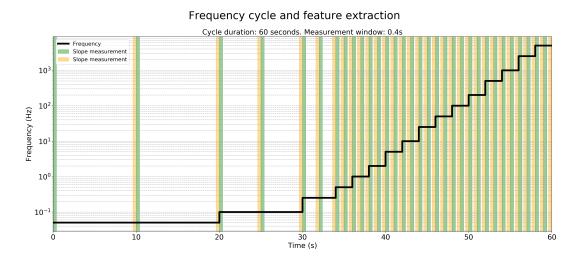


Figure 3.3: Feature measurements times per cycle.

Finally, all 125 gas mixtures were subjected to the experiment three times, each time at a different temperature. Table 3.1 summarizes the data acquisition details.

For specific timestamps and measurement durations, the reader is referred to Appendix 8.1.

3.2 Raw data


TODO: add data itself. (Fingers crossed it will be this week.)


Table 3.1: Data acquisition details

Parameter	Value
Factors (gases)	3
Levels (concentrations)	5
Frequencies	16
Features per frequency	4 (2 slopes and 2 averages)
Features per cycle	64
Number of cycles	5
Data points per mixture	320
Number of mixtures	125
Datapoints per experiment	40.000
Number of experiments	3
Total data points	120.000

3.3 Secondary data


See above






6 Discussion

- 6.1 Results
- 6.2 Method
- 6.3 The work in a wider context






Bibliography

- [1] R. Alberto Bernabeo, K. Webster, and M. Onofri. "Health and Environmental Impacts of Nox: An Ultra- Low Level of Nox (Oxides of Nitrogen) Achievable with A New Technology." In: *Global Journal of Engineering Sciences* 3 (), pp. 2–7. DOI: 10.33552/gjes.2019.02.000540.
- [2] ASTDR. "Sheet for ammonia published by the Agency for Toxic Substance and Disease Registry (ASTDR)." In: 2672 (2004), pp. 1–18. URL: https://www.atsdr.cdc.gov/MHMI/mmg126.pdf%5C%OAhttps://www.atsdr.cdc.gov/mmg/mmg.asp?id=7&tid=2#bookmark02.
- [3] Manuel Bastuck. "Improving the performance of gas sensor systems with advanced data evaluation, operation, and calibration methods." PhD thesis. Jan. 2019, p. 267.
- [4] Thirupathi Boningari and Panagiotis G. Smirniotis. "Impact of nitrogen oxides on the environment and human health: Mn-based materials for the NOx abatement." In: *Current Opinion in Chemical Engineering* 13.x (2016), pp. 133–141. ISSN: 22113398. DOI: 10.1016/j.coche. 2016.09.004. URL: http://dx.doi.org/10.1016/j.coche.2016.09.004.
- [5] Christian Bur, Manuel Bastuck, Anita Lloyd Spetz, Mike Andersson, and Andreas Schütze. "Selectivity enhancement of SiC-FET gas sensors by combining temperature and gate bias cycled operation using multivariate statistics." In: Sensors and Actuators B: Chemical 193 (2014), pp. 931–940. ISSN: 0925-4005. DOI: https://doi.org/10.1016/j.snb.2013.12.030. URL: https://www.sciencedirect.com/science/article/pii/S0925400513015037.
- [6] Pio Forzatti. "Present status and perspectives in de-NOx SCR catalysis." In: Applied Catalysis A: General 222.1 (2001). Celebration Issue, pp. 221–236. ISSN: 0926-860X. DOI: https://doi.org/10.1016/S0926-860X(01)00832-8. URL: https://www.sciencedirect.com/science/article/pii/S0926860X01008328.
- [7] Jerome Friedman, Trevor Hastie, Robert Tibshirani, et al. *The elements of statistical learning*. Vol. 1. 10. Springer series in statistics New York, 2001.

- [8] Susan Guthrie, Sarah Giles, Fay Dunkerley, Hadeel Tabaqchali, Amelia Harshfield, Becky loppolo, and Catriona Manville. *Impact of ammonia emissions from agriculture on biodiversity: An evidence synthesis*. Santa Monica, CA: RAND Corporation, 2018. DOI: 10.7249/RR2695.
- [9] Richard Arnold Johnson, Dean W Wichern, et al. *Applied multivariate statistical analysis*. Vol. 5.8. Prentice hall Upper Saddle River, NJ, 2002.
- [10] Kee Siong Ng. "A simple explanation of partial least squares." In: *The Australian National University, Canberra* (2013).
- [11] Jonathon Shlens. "A tutorial on principal component analysis." In: arXiv preprint arXiv:1404.1100 (2014).
- [12] USEPA. Nitrogen Oxides Control Regulations. https://www3.epa.gov/region1/airquality/nox.html. Accessed 2021-02-09. 2019.
- [13] Svante Wold, Michael Sjöström, and Lennart Eriksson. "PLS-regression: a basic tool of chemometrics." In: Chemometrics and Intelligent Laboratory Systems 58.2 (2001). PLS Methods, pp. 109–130. ISSN: 0169-7439. DOI: https://doi.org/10.1016/S0169-7439(01)00155-1. URL: https://www.sciencedirect.com/science/article/pii/S0169743901001551.
- [14] Kevin Wright. *The NIPALS algorithm*. https://cran.r-project.org/web/packages/nipals/vignettes/nipals_algorithm.html. Accessed: 2021-03-12.



8.1 Appendix A: Data acquisition time stamps

Slope	Frequency (Hz)	Duration (s)	Feature	Start time (s)	End time (s)
Slope 10,0 10,4 Average 19,6 20,0 20,4 Slope 20,0 20,4 Average 24,6 25,0 Slope 25,0 30,0 Slope 30,0 30,4 Average 31,6 32,0 Slope 32,0 32,4 Average 34,6 35,0 Slope 34,0 34,4 Average 35,6 36,0 Slope 36,0 36,4 Average 35,6 36,0 Slope 36,0 36,4 Average 37,6 38,0 Slope 38,0 38,4 Average 37,6 38,0 Slope 38,0 38,4 Average 37,6 38,0 Slope 39,0 39,4 Average 38,6 39,0 Slope 39,0 39,4 Average 39,6 40,0 Slope 40,0 40,4 Average 40,6 41,0 Slope 41,0 41,4 Average 42,6 43,0 Slope 43,0 43,4 Average 43,6 44,0 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Average 45,6 46,0 Average 45,6 46,0 Average 45,6 46,0 Average 47,6 48,0 Slope 47,0 47,4 Average 49,6 50,0 Slope 50,0 50,4 Average 51,6 52,0 Slope 52,0 52,4 Average 53,6 54,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 59,0 59,4 Slope 59,0 59,4 Slope 59,0 59,4 Slope 59,0 59,4			Slope	0,0	0,4
Slope 10,0 10,4 Average 19,6 20,0 20,4 Slope 20,0 20,4 Average 24,6 25,0 Slope 25,0 30,0 Slope 30,0 30,4 Average 31,6 32,0 Slope 32,0 32,4 Average 34,6 35,0 Slope 34,0 34,4 Average 35,6 36,0 Slope 36,0 36,4 Average 35,6 36,0 Slope 36,0 36,4 Average 37,6 38,0 Slope 38,0 38,4 Average 37,6 38,0 Slope 38,0 38,4 Average 37,6 38,0 Slope 39,0 39,4 Average 38,6 39,0 Slope 39,0 39,4 Average 39,6 40,0 Slope 40,0 40,4 Average 40,6 41,0 Slope 41,0 41,4 Average 42,6 43,0 Slope 43,0 43,4 Average 43,6 44,0 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Average 45,6 46,0 Average 45,6 46,0 Average 45,6 46,0 Average 47,6 48,0 Slope 47,0 47,4 Average 49,6 50,0 Slope 50,0 50,4 Average 51,6 52,0 Slope 52,0 52,4 Average 53,6 54,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 59,0 59,4 Slope 59,0 59,4 Slope 59,0 59,4 Slope 59,0 59,4	0.05				
Slope 20,0 20,4 Average 24,6 25,0 Slope 20,0 30,0 Slope 30,0 30,4 Average 31,6 32,0 Slope 32,0 32,4 Average 34,6 33,0 Slope 32,0 32,4 Average 34,6 34,0 Slope 35,0 35,4 Average 35,6 36,0 Slope 37,0 37,4 Average 37,6 38,0 Slope 38,0 38,4 Average 38,6 39,0 Slope 39,0 39,4 Average 39,6 40,0 Average 39,6 40,0 Average 40,6 41,0 Slope 41,0 41,4 Average 41,6 42,0 Average 42,6 43,0 Average 43,6 44,0 Average 43,6 44,0 Average 44,6 45,0 Slope 44,0 44,4 Average 45,6 46,0 Average 45,6 46,0 Slope 46,0 46,4 Average 47,6 48,0 Slope 47,0 47,4 Average 49,6 50,0 Slope 50,0 50,4 Average 51,6 52,0 Slope 53,0 53,4 Average 53,6 54,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 59,0 59,4 Slope 59,0 59,4	0.05	20			
10					
Slope 25,0 25,4 Average 29,6 30,0 30,4 Average 31,6 32,0 32,4 Average 33,6 34,0 34,4 Average 33,6 35,0 35,4 Average 35,6 35,0 35,4 Average 35,6 36,0 36,4 Average 36,6 37,0 37,4 Average 37,6 38,0 38,4 Average 37,6 38,0 38,4 Average 37,6 38,0 38,4 Average 37,6 38,0 38,4 Average 39,6 40,0 Average 39,6 40,0 Average 39,6 40,0 Average 39,6 40,0 Average 40,6 41,0 Average 41,6 42,0 Average 41,6 42,0 Average 42,6 43,0 Average 43,6 44,0 Average 43,6 44,0 Average 43,6 44,0 Average 43,6 44,0 Average 44,6 45,0 Slope 44,0 44,4 Average 45,6 46,0 Average 45,6 46,0 Average 45,6 45,0 Average 45,6 45,0 Average 47,6 48,0 Average 47,6 48,0 Average 48,6 49,0 Average 49,6 50,0 Average 49,6 50,0 Average 49,6 50,0 Average 49,6 50,0 Average 45,6 46,0 Average 47,6 48,0 Average 48,6 49,0 Average 49,6 50,0 Slope 49,0 49,4 Average 51,6 52,0 Slope 51,0 51,4 Average 51,6 52,0 Slope 51,0 51,4 Average 51,6 52,0 Slope 53,0 53,4 Average 53,6 54,0 Average 54,6 55,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 57,0 57,4 Average 58,6 59,0 Slope 59,0 59,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 59,0 59,4 Average 57,6 58,0 Slope 59,0 59,4 Average 57,6 58,0 Slope 59,0 59,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 59,0 59,4 Average 57,6 58,0 Slope 59,0 59,4 Average 57,6 58,0 Slope 57,0					
Slope 25,0 25,0 25,0 25,0 25,0 30,0 32,0 32,0 32,0 32,0 32,0 32,0 34,0 34,4 34,4 34,4 34,4 34,4 34,4 35,0 35,0 35,6 36,0 36,0 36,0 36,0 36,0 36,0 36,0 36,0 36,0 36,0 36,0 36,0 36,0 36,0 36,0 36,0 37,0 37,4 38,0 38,4 38,0 38,4 38,0 38,4 38,0 38,4 38,0 38,4 38,0 38,0 38,4 38,0 38,0 38,4 38,0 38,0 38,4 38,0 39,0 39,4 39,0	0.1	10	Average	24,6	25,0
Slope 30,0 30,4	0.1	10	Slope	25,0	25,4
Slope 30,0 30,4			Average	29,6	30,0
Slope 32,0 32,4 Average 33,6 34,0 Average 34,6 35,0 Slope 35,0 35,4 Average 35,6 36,0 Slope 36,0 36,4 Average 36,6 37,0 Slope 37,0 37,4 Average 37,6 38,0 Slope 38,0 38,4 Average 39,6 39,0 Slope 39,0 39,4 Average 39,6 40,0 Slope 40,0 40,4 Average 41,6 42,0 Average 41,6 42,0 Average 42,6 43,0 Slope 43,0 43,4 Average 43,6 44,0 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Average 47,6 48,0 Average 48,6 49,0 Slope 49,0 49,4 Average 49,6 50,0 Slope 49,0 49,4 Average 49,6 50,0 Slope 50,0 50,4 Average 51,6 52,0 Slope 53,0 53,4 Average 53,6 54,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 57,0 57,4 Average 58,6 59,0 Slope 59,0 59,4 Slope 59,0 59,4 Slope 59,0 59,4 Slope 59,0 59,4	0.25		Slope	30,0	30,4
Slope 32,0 32,4 Average 33,6 34,0 Slope 34,0 34,4 Average 34,6 35,0 Slope 35,0 35,4 Average 35,6 36,0 Slope 36,0 36,4 Average 36,6 37,0 Slope 37,0 37,4 Average 37,6 38,0 Slope 39,0 39,4 Average 38,6 39,0 Slope 39,0 39,4 Average 39,6 40,0 Slope 40,0 40,4 Average 41,6 42,0 Slope 41,0 41,4 Average 41,6 42,0 Slope 42,0 42,4 Average 42,6 43,0 Slope 43,0 43,4 Average 43,6 44,0 Average 44,6 45,0 Slope 44,0 44,4 Average 45,6 46,0 Average 45,6 46,0 Average 47,6 48,0 Average 47,6 48,0 Average 47,6 48,0 Average 49,6 50,0 Slope 50,0 50,4 Average 51,6 52,0 Slope 52,0 52,4 Average 53,6 54,0 Slope 54,0 54,4 Average 55,6 56,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 59,0 59,0 Slope 59,0 59,0 Slope 59,0 59,0 Slope 59,0 5			Average	31,6	32,0
Slope 34,0 34,4		4	Slope	32,0	32,4
1.0 2			Average	33,6	34,0
Slope 35,0 35,4 Average 35,6 36,0 Slope 36,0 36,4 Average 36,6 37,0 Slope 37,0 37,4 Average 37,6 38,0 Slope 38,0 38,4 Average 38,6 39,0 Slope 39,0 39,4 Average 39,6 40,0 Average 40,6 41,0 Slope 41,0 41,4 Average 42,6 43,0 Slope 42,0 42,4 Average 42,6 43,0 Slope 43,0 43,4 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Average 47,6 48,0 Slope 47,0 47,4 Average 47,6 48,0 Average 48,6 49,0 Average 49,6 50,0 Slope 50,0 50,4 Average 51,6 52,0 Slope 53,0 53,4 Average 54,6 55,0 Slope 55,0 55,4 Average 56,6 57,0 Slope 57,0 57,4 Average 58,6 59,0 Slope 59,0 59,4			Slope	34,0	34,4
Slope 35,0 35,4 Average 35,6 36,0 Slope 36,0 36,4 Average 36,6 37,0 Slope 37,0 37,4 Average 37,6 38,0 Slope 38,0 38,4 Average 37,6 38,0 Slope 39,0 39,4 Average 39,6 40,0 Average 40,6 41,0 Slope 40,0 40,4 Average 41,6 42,0 Slope 42,0 42,4 Average 42,6 43,0 Average 43,6 44,0 Average 44,6 45,0 Slope 44,0 44,4 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Average 46,6 47,0 Slope 47,0 47,4 Average 47,6 48,0 Average 49,6 50,0 Slope 49,0 49,4 Average 49,6 50,0 Slope 49,0 49,4 Average 49,6 50,0 Slope 50,0 50,4 Average 50,6 51,0 Slope 52,0 52,4 Average 53,6 54,0 Average 54,6 55,0 Slope 55,0 55,4 Average 54,6 55,0 Slope 57,0 57,4 Average 56,6 57,0 Slope 57,0 57,4 Average 58,6 59,0 Slope 59,0 59,4 Slope 58,0 58,4 Average 58,6 59,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4	0.5	2	Average	34,6	35,0
Slope 36,0 36,4 Average 36,6 37,0 Slope 37,0 37,4 Average 37,6 38,0 Slope 38,0 38,4 Average 38,6 39,0 Slope 39,0 39,4 Average 39,6 40,0 Slope 40,0 40,4 Average 40,6 41,0 Average 41,6 42,0 Slope 42,0 42,4 Average 42,6 43,0 Slope 43,0 43,4 Average 43,6 44,0 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Average 46,6 47,0 Slope 47,0 47,4 Average 47,6 48,0 Slope 48,0 48,4 Average 48,6 49,0 Slope 49,0 49,4 Average 49,6 50,0 Slope 49,0 49,4 Average 48,6 49,0 Slope 49,0 50,4 Average 50,6 51,0 Slope 50,0 50,4 Average 51,6 52,0 Slope 53,0 53,4 Average 53,6 54,0 Slope 54,0 54,4 Average 55,6 56,0 Slope 56,0 56,4 Average 57,6 58,0 Slope 57,0 57,4 Average 58,6 59,0 Slope 58,0 58,0 Slope 59,0 59,4 Slope 59,0 59,4 Slope 58,0 58,0 Slope 58,0 58,0 Slope 58,0 58,0 Slope 59,0 59,4	0.5	2	Slope	35,0	35,4
1.0 2 Average 36,6 37,0 37,4 Average 37,6 38,0 Slope 37,0 37,4 Average 37,6 38,0 Slope 38,0 38,4 Average 38,6 39,0 Slope 39,0 39,4 Average 39,6 40,0 Slope 40,0 40,4 Average 40,6 41,0 41,4 Average 41,6 42,0 42,4 Average 42,6 43,0 Slope 42,0 42,4 Average 43,6 44,0 Average 43,6 44,0 Average 43,6 44,0 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Slope 45,0 45,4 Average 45,6 46,0 Slope 47,0 47,4 Average 47,6 48,0 Average 47,6 48,0 Average 47,6 48,0 Average 48,6 49,0 Average 49,6 Slope 49,0 Average 49,6 Slope 49,0 Average 49,6 Slope 50,0 Slope 51,0 Sl,4 Average 51,6 Slope 51,0 Sl,4 Average 51,6 Slope 52,0 Slope 52,0 Slope 53,0 Slope 53,0 Slope 54,0 Average 53,6 Slope 55,0 Slope 55,0 Slope 55,0 Slope 56,0 56,4 Average 55,6 Slope 57,0 Slope 58,0 Slope 59,0 Slope 58,0 Slope 58,0 Slope 58,0 Slope 58,0 Slope 58,0 Slope 59,0 Slop			Average	35,6	36,0
Slope 37,0 37,4 Average 37,6 38,0 Slope 38,0 38,4 Average 38,6 39,0 Slope 39,0 39,4 Average 39,6 40,0 Average 40,6 41,0 Slope 41,0 41,4 Average 41,6 42,0 Slope 42,0 42,4 Average 43,6 44,0 Slope 44,0 44,4 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Average 47,6 48,0 Slope 47,0 47,4 Average 47,6 48,0 Slope 47,0 47,4 Average 47,6 48,0 Slope 48,0 48,4 Average 49,6 50,0 Slope 49,0 49,4 Average 49,6 50,0 Slope 50,0 50,4 Average 50,6 51,0 Slope 51,0 51,4 Average 52,6 53,0 Slope 53,0 53,4 Average 54,6 55,0 Slope 55,0 56,4 Average 55,6 56,0 Slope 56,0 56,4 Average 57,6 58,0 Slope 57,0 57,4 Average 58,6 59,0 Slope 59,0 59,4 Slope 58,0 58,4 Average 58,6 59,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4			Slope	36,0	36,4
Slope 37,6 38,0 38,4	1.0	,	Average	36,6	37,0
Slope 38,0 38,4 Average 38,6 39,0 Slope 39,0 39,4 Average 39,6 40,0 Slope 40,0 40,4 Average 40,6 41,0 Slope 41,0 41,4 Average 41,6 42,0 Average 42,6 43,0 Slope 43,0 43,4 Average 43,6 44,0 Slope 44,0 44,4 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Slope 46,0 46,4 Average 47,6 48,0 Slope 47,0 47,4 Average 47,6 48,0 Slope 48,0 48,4 Average 49,6 50,0 Slope 50,0 50,4 Average 51,6 52,0 Slope 53,0 53,4 Average 53,6 54,0 Slope 54,0 54,4 Average 55,6 56,0 Slope 57,0 55,4 Average 55,6 56,0 Slope 57,0 57,4 Average 58,6 59,0 Slope 57,0 57,4 Average 58,6 59,0 Slope 57,0 57,6 Slope 58,0 58,4 Average 58,6 59,0 Slope 57,0 57,6 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4	1.0	2	Slope	37,0	37,4
2.0 2			Average	37,6	38,0
Slope 39,0 39,4 Average 39,6 40,0 Slope 40,0 40,4 Average 40,6 41,0 Slope 41,0 41,4 Average 41,6 42,0 Slope 42,0 42,4 Average 42,6 43,0 Slope 43,0 43,4 Average 43,6 44,0 Slope 44,0 44,4 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Slope 46,0 46,4 Average 47,6 48,0 Slope 47,0 47,4 Average 47,6 48,0 Slope 48,0 48,4 Average 49,6 50,0 Slope 49,0 49,4 Average 49,6 50,0 Slope 50,0 50,4 Average 50,6 51,0 Slope 51,0 51,4 Average 51,6 52,0 Slope 52,0 52,4 Average 53,6 54,0 Average 54,6 55,0 Slope 55,0 55,4 Average 54,6 55,0 Slope 55,0 55,4 Average 54,6 55,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4			Slope	38,0	38,4
Slope 39,0 39,4 Average 39,6 40,0 Slope 40,0 40,4 Average 40,6 41,0 Slope 41,0 41,4 Average 41,6 42,0 Average 42,6 43,0 Slope 43,0 43,4 Average 43,6 44,0 Slope 44,0 44,4 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Average 46,6 47,0 Slope 47,0 47,4 Average 47,6 48,0 Slope 48,0 48,4 Average 49,6 50,0 Slope 49,0 49,4 Average 49,6 50,0 Slope 50,0 50,4 Average 50,6 51,0 Slope 51,0 51,4 Average 51,6 52,0 Slope 53,0 53,4 Average 53,6 54,0 Slope 54,0 54,4 Average 53,6 54,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 57,0 57,6 Slope 57,0 57,6 Slope 57,0 58,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4	2.0	,	Average	38,6	39,0
Slope	2.0	2	Slope	39,0	39,4
10.0 2			Average	39,6	40,0
Slope			Slope	40,0	40,4
Slope	F 0	,	Average	40,6	41,0
Slope 42,0 42,4 Average 42,6 43,0 Slope 43,0 43,4 Average 43,6 44,0 Average 43,6 44,0 Average 43,6 44,0 Slope 44,0 44,4 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Average 46,6 47,0 Slope 47,0 47,4 Average 47,6 48,0 Average 48,6 49,0 Slope 49,0 49,4 Average 49,6 50,0 Slope 50,0 50,4 Average 51,6 52,0 Slope 53,0 53,4 Average 54,6 55,0 Slope 55,0 55,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4	5.0	2	Slope	41,0	41,4
10.0 2 Average 42,6 43,0 43,4 Average 43,6 44,0 Slope 44,0 44,4 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Slope 46,0 46,4 Average 47,6 48,0 Slope 47,0 47,4 Average 47,6 48,0 Slope 48,0 48,4 Average 48,6 49,0 Slope 49,0 49,4 Average 49,6 Slope 49,0 49,4 Average 49,6 Slope 50,0 Slope 51,0 Slope 51,0 Slope 51,0 Slope 52,0 52,4 Average 53,6 54,0 Average 53,6 54,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 59,0 59,4			Average	41,6	42,0
Slope 43,0 43,4 Average 43,6 44,0 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Slope 46,0 46,4 Average 46,6 47,0 Slope 47,0 47,4 Average 47,6 48,0 Slope 48,0 48,4 Average 48,6 49,0 Slope 49,0 49,4 Average 49,6 50,0 Slope 50,0 50,4 Average 50,6 51,0 Slope 51,0 51,4 Average 52,6 53,0 Slope 53,0 53,4 Average 54,6 55,0 Slope 55,0 55,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4			Slope	42,0	42,4
Slope 43,0 43,4 Average 43,6 44,0 Average 44,6 45,0 Slope 45,0 45,4 Average 45,6 46,0 Slope 46,0 46,4 Average 46,6 47,0 Slope 47,0 47,4 Average 47,6 48,0 Slope 48,0 48,4 Average 48,6 49,0 Slope 49,0 49,4 Average 49,6 50,0 Slope 50,0 50,4 Average 50,6 51,0 Slope 51,0 51,4 Average 52,6 53,0 Slope 53,0 53,4 Average 54,6 55,0 Slope 55,0 55,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4	10.0	,	Average	42,6	43,0
Slope	10.0	2		43,0	43,4
25.0 2 Average 44,6 45,0 45,4 Average 45,6 46,0 Average 45,6 46,0 46,4 Average 46,6 47,0 Slope 47,0 47,4 Average 47,6 48,0 Slope 48,0 48,4 Average 49,6 50,0 Slope 49,0 49,4 Average 49,6 50,0 Slope 51,0 51,4 Average 51,6 52,0 Slope 52,0 52,4 Average 53,6 54,0 Slope 53,0 53,4 Average 53,6 54,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 57,0 59,4 Slope 57,0 58,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4 Slope 59,0 59,4			Average	43,6	44,0
Slope	25.0		Slope	44,0	44,4
Slope 45,0 45,4 Average 45,6 46,0 Slope 46,0 46,4 Average 46,6 47,0 Slope 47,0 47,4 Average 47,6 48,0 Slope 48,0 48,4 Average 48,6 49,0 Slope 49,0 49,4 Average 49,6 50,0 Slope 50,0 50,4 Average 50,6 51,0 Slope 51,0 51,4 Average 52,6 53,0 Slope 53,0 53,4 Average 54,6 55,0 Slope 55,0 55,4 Average 54,6 55,0 Slope 55,0 55,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4		_	Average	44,6	45,0
Slope		2	Slope	45,0	45,4
Solution			Average	45,6	46,0
Slope	F0.0		Slope	46,0	46,4
Slope 47,0 47,4		2	Average	46,6	47,0
Slope	50.0	2	Slope	47,0	47,4
100.0 2 Average 48,6 49,0 49,4 Average 49,6 50,0 Slope 50,0 50,4 Average 50,6 51,0 Slope 51,0 51,4 Average 51,6 52,0 Slope 52,0 52,4 Average 52,6 53,0 Slope 53,0 53,4 Average 53,6 54,0 Slope 54,0 54,4 Average 54,6 55,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 56,0 56,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 57,0 58,4 Average 57,6 58,0 Slope 58,0 58,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4			Average	47,6	48,0
Slope			Slope	48,0	48,4
Slope 49,0 49,4 Average 49,6 50,0 Slope 50,0 50,4 Average 50,6 51,0 Slope 51,0 51,4 Average 51,6 52,0 Slope 52,0 52,4 Average 52,6 53,0 Slope 53,0 53,4 Average 53,6 54,0 Slope 54,0 54,4 Average 54,6 55,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 56,0 56,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4	100.0	2	Average	48,6	49,0
Slope 50,0 50,4 Average 50,6 51,0 Slope 51,0 51,4 Average 51,6 52,0 Slope 52,0 52,4 Average 52,6 53,0 Slope 53,0 53,4 Average 53,6 54,0 Average 53,6 54,0 Average 54,6 55,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 56,0 56,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4	100.0		Slope	49,0	49,4
Slope 50,0 50,4 Average 50,6 51,0 Slope 51,0 51,4 Average 51,6 52,0 Slope 52,0 52,4 Average 52,6 53,0 Slope 53,0 53,4 Average 53,6 54,0 Average 53,6 54,0 Average 54,6 55,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 56,0 56,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4			Average	49,6	50,0
200.0 2 Average 50,6 51,0 51,4 51,4 51,0 51,4 52,0 52,0 52,4 52,0 52,4 52,0 52,4 52,0 52,4 53,0 53,4 53,0 53,4 53,0 53,4 53,0 53,4 54,0 54,0 54,0 54,0 54,4 50,0 54,4 51,0				50,0	50,4
Slope S1,0 S1,4 Average S1,6 S2,0 Slope S2,0 S2,4 Average S2,6 S3,0 Slope S3,0 S3,4 Average S3,6 S4,0 Average S4,0 S4,4 Average S5,6 S5,0 Slope S5,0 S5,4 Average S5,6 S6,0 Slope S6,0 S6,4 Average S6,6 S7,0 Slope S7,0 S7,4 Average S7,6 S8,0 Slope S8,0 S8,4 Average S8,6 S9,0 Slope S9,0 S9,4 Average S8,6 S9,0 Slope S9,0 S9,4	200.0	2		50,6	51,0
Slope 52,0 52,4 Average 52,6 53,0 Slope 53,0 53,4 Average 53,6 54,0 Slope 54,0 54,4 Average 54,6 55,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 56,0 56,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4	200.0	2		51,0	51,4
500.0 2 Average 52,6 53,0 53,4 53,4 53,0 53,4 Average 53,6 54,0 54,4 55,0 55,0 55,4 Average 54,6 55,0 55,4 Average 55,6 56,0 56,4 Average 55,6 56,0 56,4 Average 56,6 57,0 51,			Average	51,6	52,0
Slope 53,0 53,4 Average 53,6 54,0 Slope 54,0 54,4 Average 54,6 55,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 56,0 56,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4			Slope	52,0	52,4
Slope 53,0 53,4 Average 53,6 54,0 Slope 54,0 54,4 Average 54,6 55,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 56,0 56,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 57,0 58,0 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 58,0 59,4	500.0	2	Average	52,6	53,0
Slope 54,0 54,4 Average 54,6 55,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 56,0 56,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4	300.0		Slope	53,0	53,4
1000.0 2 Average 54,6 55,0 Slope 55,0 55,4 Average 55,6 56,0 Slope 56,0 56,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4				53,6	54,0
Slope 55,0 55,4 Average 55,6 56,0 Slope 56,0 56,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 57,0 58,0 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4			Slope	54,0	54,4
Slope 55,0 55,4 Average 55,6 56,0 Slope 56,0 56,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 57,6 58,0 Average 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4	1000.0	2	Average	54,6	55,0
Slope 56,0 56,4 Average 56,6 57,0 Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4	1000.0	2	Slope	55,0	55,4
2500.0 2 Average 56,6 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4			Average	55,6	56,0
Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4	2500.0		Slope	56,0	56,4
Slope 57,0 57,4 Average 57,6 58,0 Slope 58,0 58,4 Average 58,6 59,0 Slope 59,0 59,4		2	Average	56,6	57,0
5000.0 2 Slope 58,0 58,4 Slope 58,6 59,0 Slope 59,0 59,4 Slope 59,0 59,4	2500.0		Slope	57,0	57,4
5000.0 2 Slope 58,0 58,4 Slope 58,6 59,0 Slope 59,0 59,4 Slope 59,0 59,4			Average	57,6	58,0
Slope 59,0 59,4				58,0	58,4
Slope 59,0 59,4	E000.0	2	Average	58,6	59,0
Average 59,6 60,0	3000.0	2			59,4
			Average	59,6	60,0

Figure 8.1: Data acquisition timestamps.