






Jumpers to select ROM Bank, and enable the EEPROM for writing. J2 is optional (may be permanently closed with solder) since write protection is controlled via software.



Pullups for the EEPROM Control signals



Flashing Led, driven by the SPL\_Clock signal.

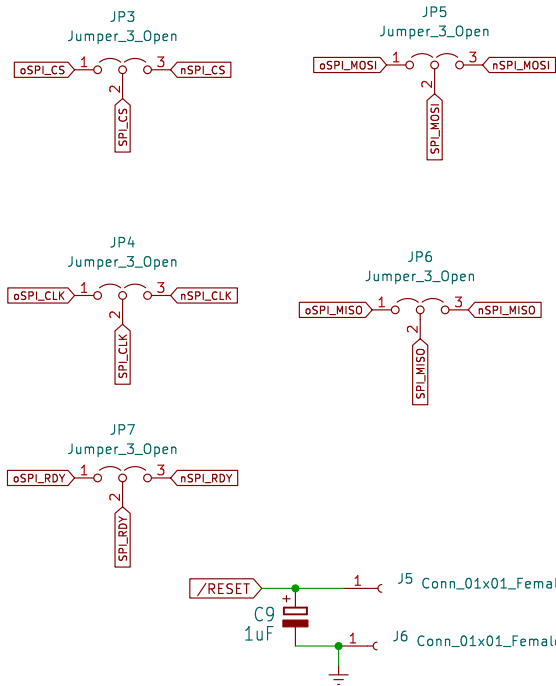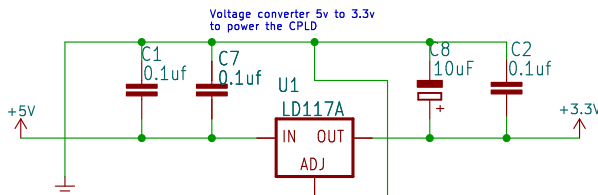

MSXPi Interface V1.2 Rev.0  
RCC © 2017 – 2025

MSXPi interface – connect MSX computer to Raspberry Pi  
EEPROM AT28C256 re-writable from MSX-DOS  
EEPROM software: [https://github.com/costarc/msxcart\\_flash32k](https://github.com/costarc/msxcart_flash32k)

2025-09-06