


FLEX & Un iFLEX

Modification F802

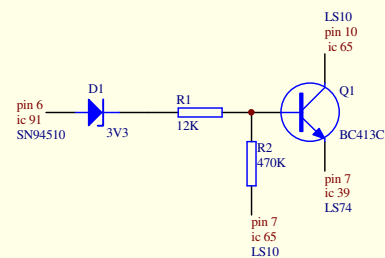

Block step puls when write signal active.

See also "FLEX\Documents\Disk Drives"

Jumper setting

Wire jumpers:

Cut jumper "K"., enable DS format SS diskette.
Keep jumpers C, D, F, M, X.

Jumper blocks:

68 jumper 2-4
68 jumper 6-8

89 jumper 1-4
89 jumper 8-11

128 jumper 1-9 drive 3 select, FLEX
128 jumper 4-12 drive 0 select, UniFLEX

94 2 > motor on print
94 3 > motor on print
94 jumper 4-5
94 jumper 6-7

155 jumper I
155 jumper H
155 jumper R
155 Cut jumpers Z, A, B, X, S

159 jumper 1-2

Title		
Size	Number	Revision
B		
Date:	28-Nov-2023	Sheet of
File:	C:\Program Files\Design Explorer 99 SE\Examples\FLEX\F802.ddb	6