


Selected-run evidence status: completed_unassessed

Geometry

Undeformed geometry

Exterior shape from the selected mesh

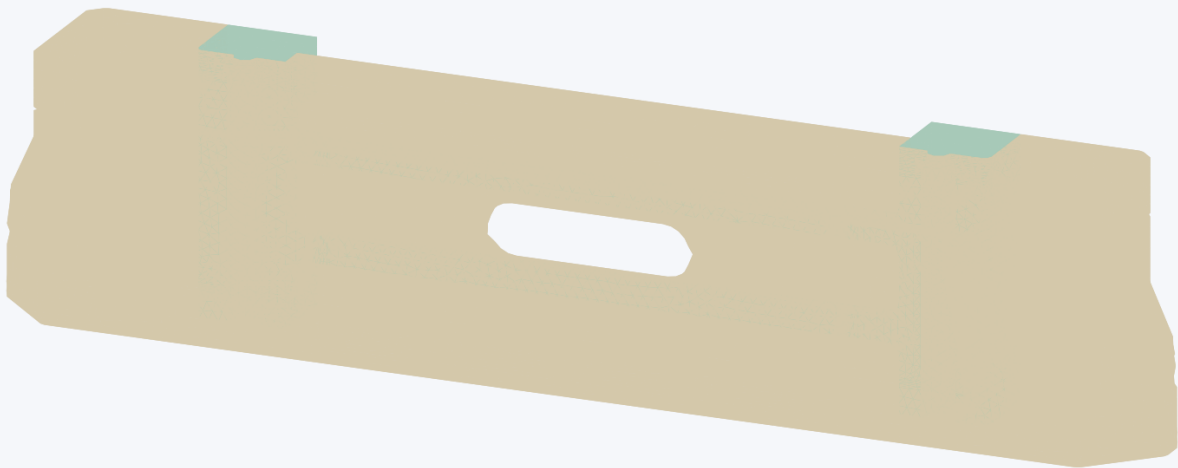

Mesh-derived exterior • source geometry unchanged

Undeformed geometry from selected mesh. Exterior shape derived from the selected run's mesh; this is not a CAD render.


Mesh

Mesh overview and local detail

Mesh nodes	34218	
Tetrahedral elements	127384	
Meshed parts	2	
Nominal element size	3.0	mm
Minimum mean-ratio quality	0.0776	0-1

Mesh overview

Undeformed exterior mesh

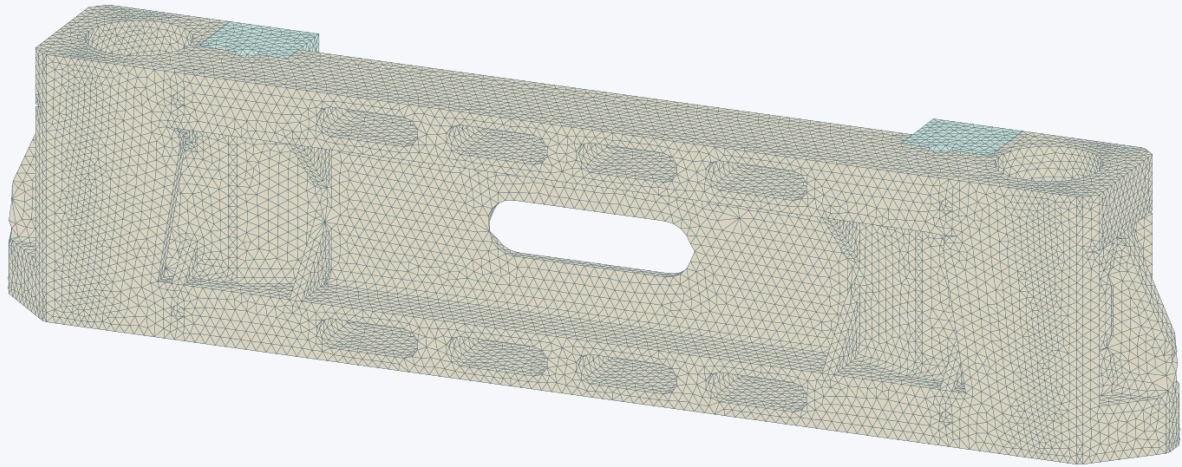


Exterior mesh faces • undeformed geometry

Mesh overview. Undeformed exterior topology of the selected case, verified against its recorded solved-mesh hashes.

Pad-root refinement detail

Pad-root region

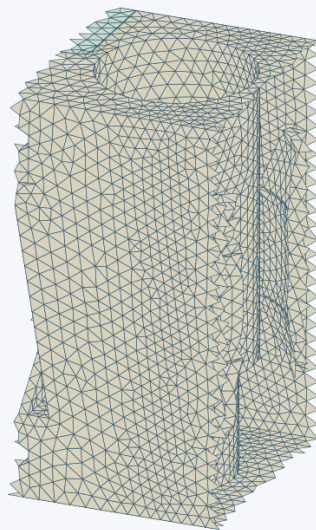

Exterior mesh faces • undeformed geometry

Pad-root refinement detail. Positive pad-root region, $X = 112\text{--}150\text{ mm}$. Mesh metadata records a 0.65 target factor (1.95 mm local target).

Mean-ratio quality describes element shape and does not establish stress or time-step convergence.

Setup

Recorded selected-case model

Initial impact velocity	50	m/s
Requested simulation duration	8	ms
Foam depth	152.4	mm
Foam width	41.275	mm
Foam height	152.4	mm
Foam element size	10	mm
Initial contact gap	0.1	mm
Contact friction coefficient	0.1	dimensionless
Foam curve scale	1	dimensionless
Time-step scale	0.6	dimensionless
Requested state-output interval	0.01	ms
Startup mass-scaling DT2MS	-1.5e-07	s
Termination time-step ratio	0.01	dimensionless
Motor mass	0.1616	kg
Moving mass	0.6488676	kg
Pusher mass	0.4872676	kg
Initial kinetic energy	811.0845	J

Recorded material, contact and boundary assumptions

- Body and bolted cable cap flexible; four local perfectly clamped bolt collars. No bolt preload, slip or failure.
- Motor loaded upper-bound inertia distributed over actual bore nodes; no motor housing stiffness or exact inertia tensor.
- PA12-CF10 elastic isotropic proxy $E=1806.6\text{MPa}$ $\nu=.35$ density 1060; print +Z motor axes. No strength/failure claims.
- No fracture, erosion, motor thrust, carrier, released endcap or invented 35g hardware allowance.
- Rigid 8mm aluminum spreaders initially stationary; fixed x,y and rotations, free z without travel limit.


- Front and rear pusher bore-quadrant averages follow fixed zero-clearance coaxial guide axes through eight disjoint LINEAR_GLOBAL X/Y equations; every Z DOF is free. Cable compliance and clearance are idealized.
- All axial stopping reaction passes through transient contact; no axial guide constraint.
- Foam rear z fixed, x/y free: frictionless fixed backing; sides unconfined.
- MAT057 synthetic loading and unloading; HU=.05 BETA=0 DAMP=.1 SHAPE=1 FAIL=0. Not a product material model.
- Generic foam anchored at one catalog point; remaining curve chosen for nonbottoming comparative stop.
- Startup-only local mass scaling requested; added mass and inertia error MUST be assessed from solver output.
- Mesh, timestep, energy and momentum require independent assessment.

Solve

Recorded run status	completed_unassessed	
Recorded reached simulation time	7.99996	ms
Recorded requested simulation time	8	ms
Recorded solver wall time	2105.547	s
Recorded termination state	normal_termination_confirmed	


Separate solve charts

Contact force resultant

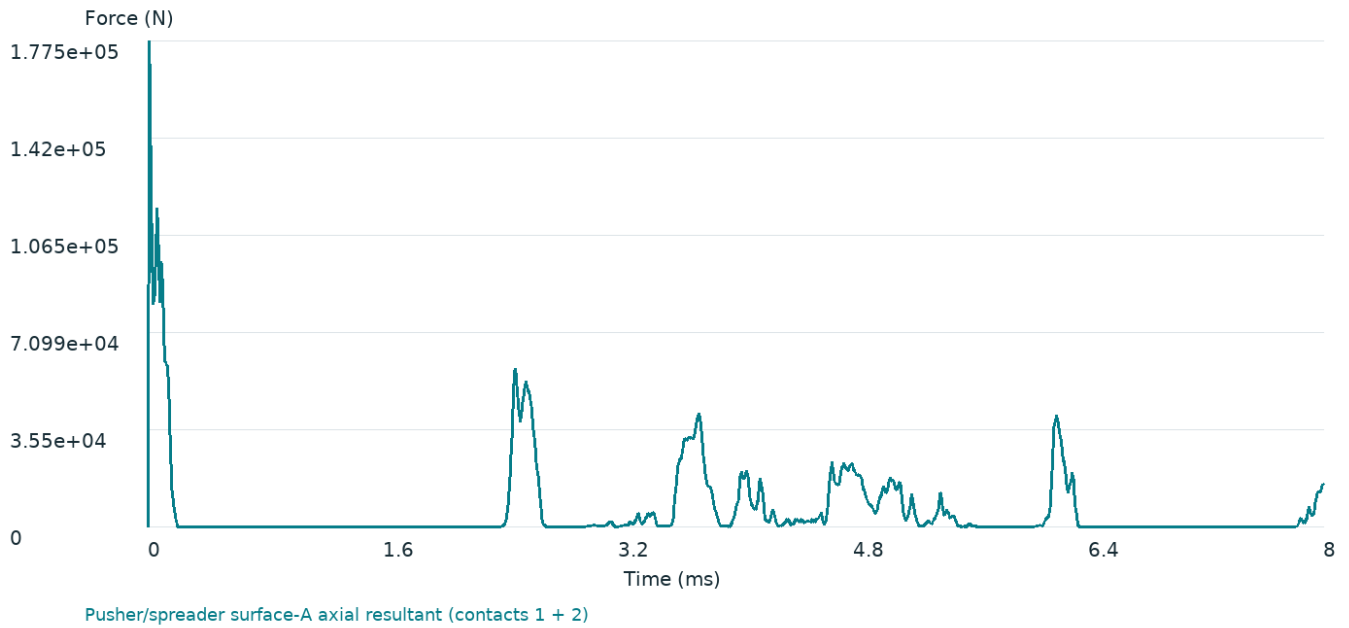


Contact force resultant. [projects/compliant_stop_340/cases/depth6-fine-v3/assessment/contact_histories.csv](#)

Mass-weighted forward velocity

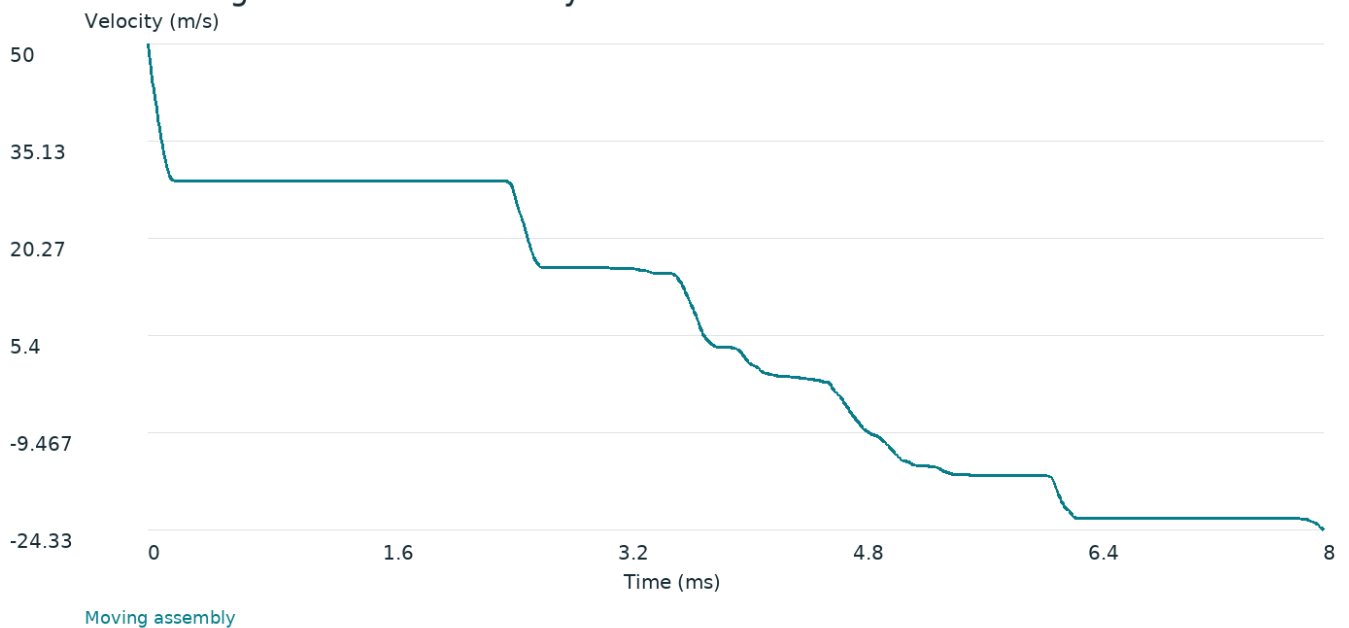


Mass-weighted forward velocity. [projects/compliant_stop_340/cases/depth6-fine-v3/assessment/time_histories.csv](#)

Moving assembly travel

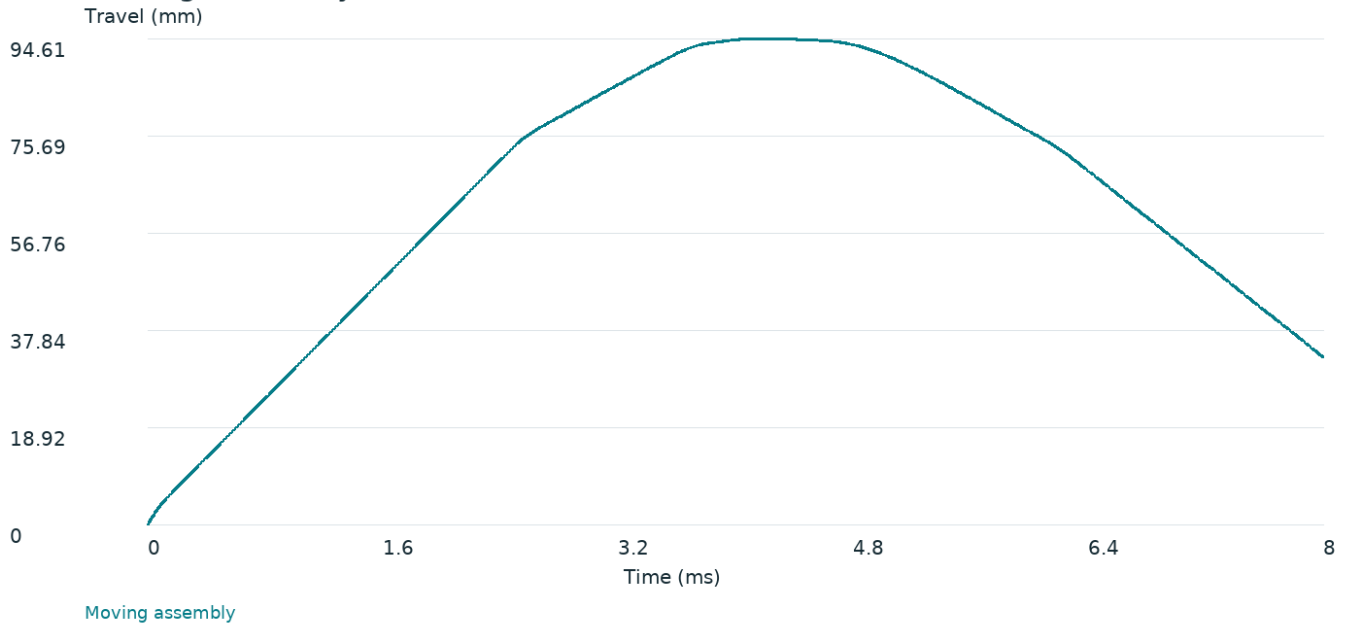


Moving assembly travel. projects/compliant_stop_340/cases/depth6-fine-v3/assessment/time_histories.csv

Foam compression

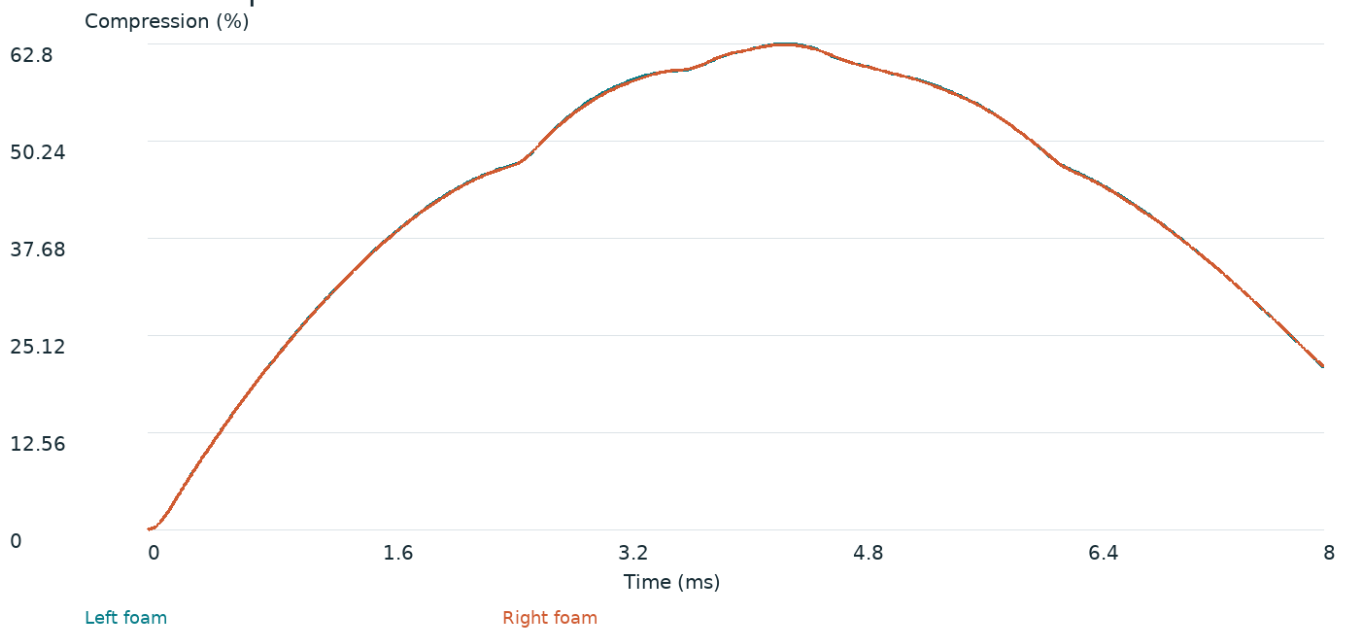


Foam compression. projects/compliant_stop_340/cases/depth6-fine-v3/assessment/time_histories.csv

Regional P99 von Mises stress

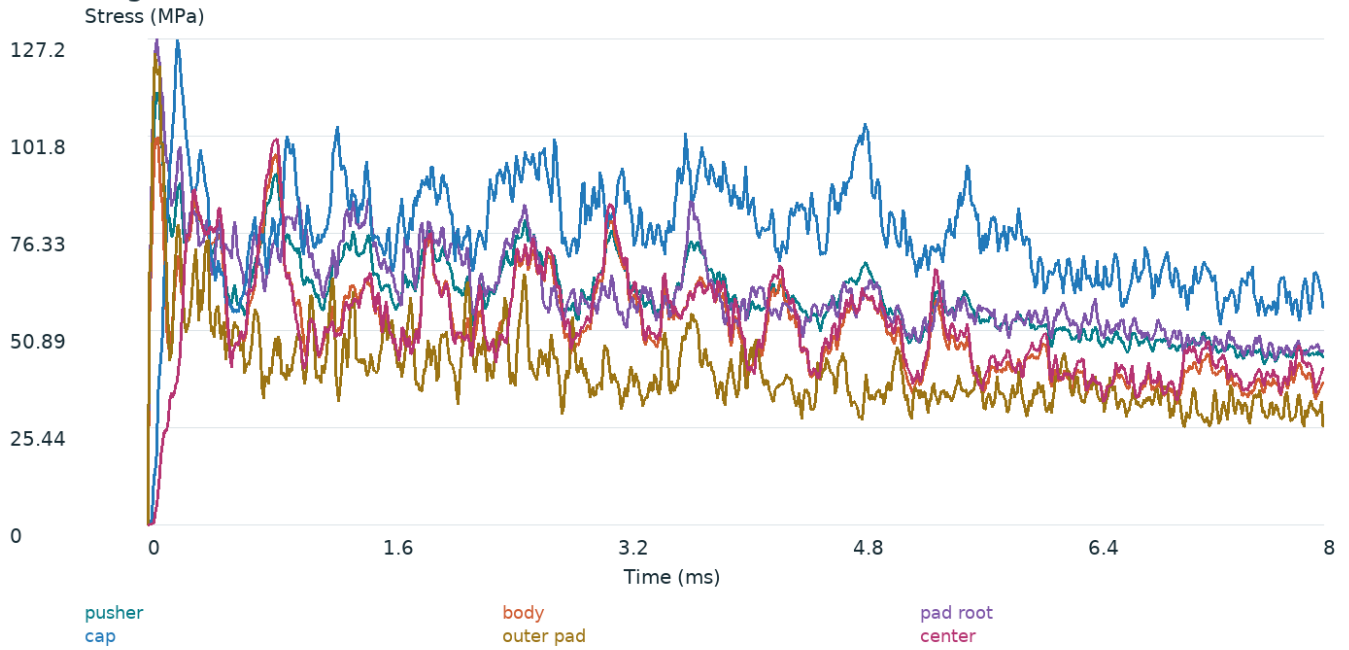

Regional P99 von Mises stress. projects/compliant_stop_340/cases/depth6-fine-v3/assessment/stress_histories.csv

Global energy

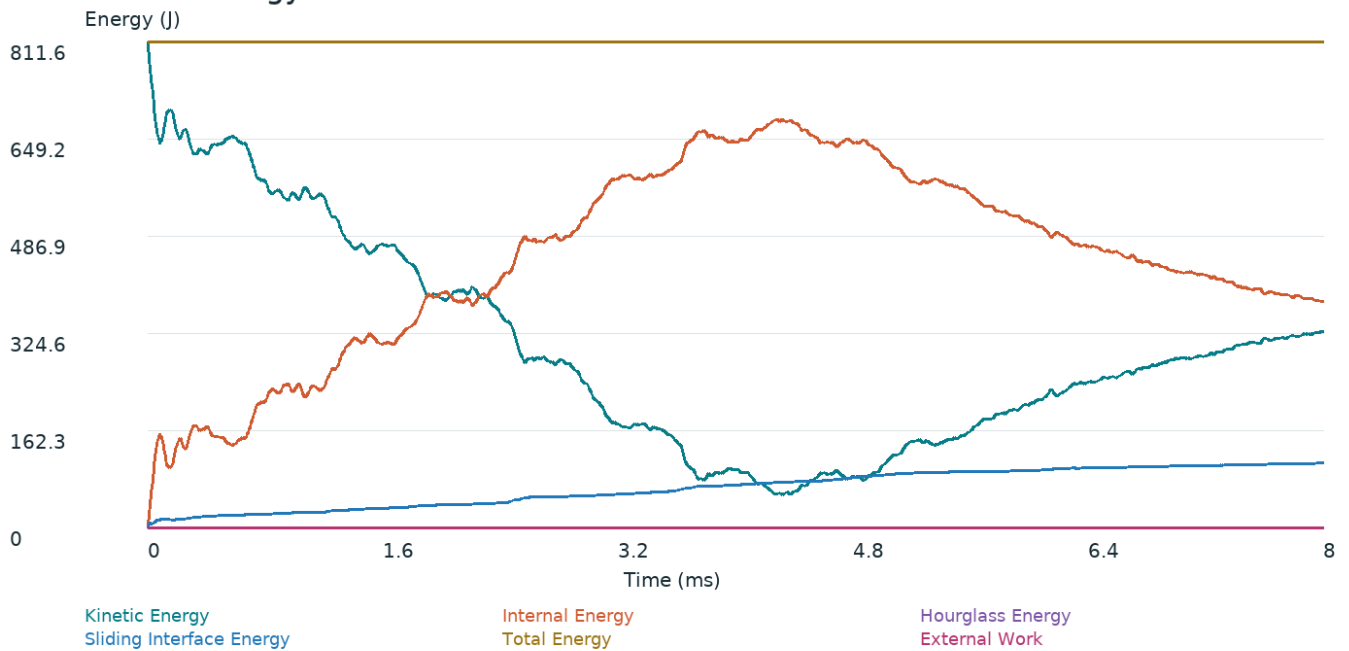

Global energy. projects/compliant_stop_340/cases/depth6-fine-v3/assessment/global_energy_histories.csv

Results

Run 012 - impact evidence

Evidence status: completed_unassessed. This report describes only extracted evidence from the selected run. Numerical checks alone do not establish physical qualification.

Geometry and model setup

Recorded model item	Value
kind	impact
pusher kg	0.487268
body kg	0.415226
cable cap kg	0.0720412
motors kg	0.1616
moving kg	0.648868
initial ke J	811.084
spreader each kg	0.135871

Solved mesh

Recorded mesh source: mesh_3mm_repaired_tips. Mesh and timestep convergence are not established by these histories.

Motion and stopping event

Signed forward velocity, travel and foam compression are measured histories. Negative forward velocity denotes rebound; a partial history cannot establish the complete stopping event.

Measured result	Value	Unit
Peak stopping force	177484	N
Maximum travel	94.6066	mm
Peak regional P99 (pad root)	127.217	MPa
Last extracted time	8.00005	ms
Final forward velocity	-24.3339	m/s

Regional stress and energy

Regional P99 values are elastic demand measures across saved states, not printed-part strength predictions. Force peaks and percentile peaks can occur at different times.


Numerical checks and qualification

Extracted numerical check	Evidence
normal termination	true
requested time reached	true
binary matches nodout	true
moving mass consistent	true
initial energy error below 0p5pct	true
energy balance error below 5pct	true
hourglass below 5pct initial energy	true
sum abs nonfriction contact energy below 5pct initial energy	true
contact impulse momentum error below 5pct	true
no axial spc on moving or guide nodes	true
rigid guides leave only axial translation free	true
no prescribed motion	true
no detected deletion	true
positive sampled foam jacobians	true
first stop captured	true
foam compression below 80pct	true
mass scaling disabled or quantified below 0p1pct moving mass	true
all transverse guide equations satisfied and no axial equation	true

Images, animations and source evidence

depth6-fine-v3
Rigid motion removed; deformation 1x; original outline gray

t = 0.010 ms

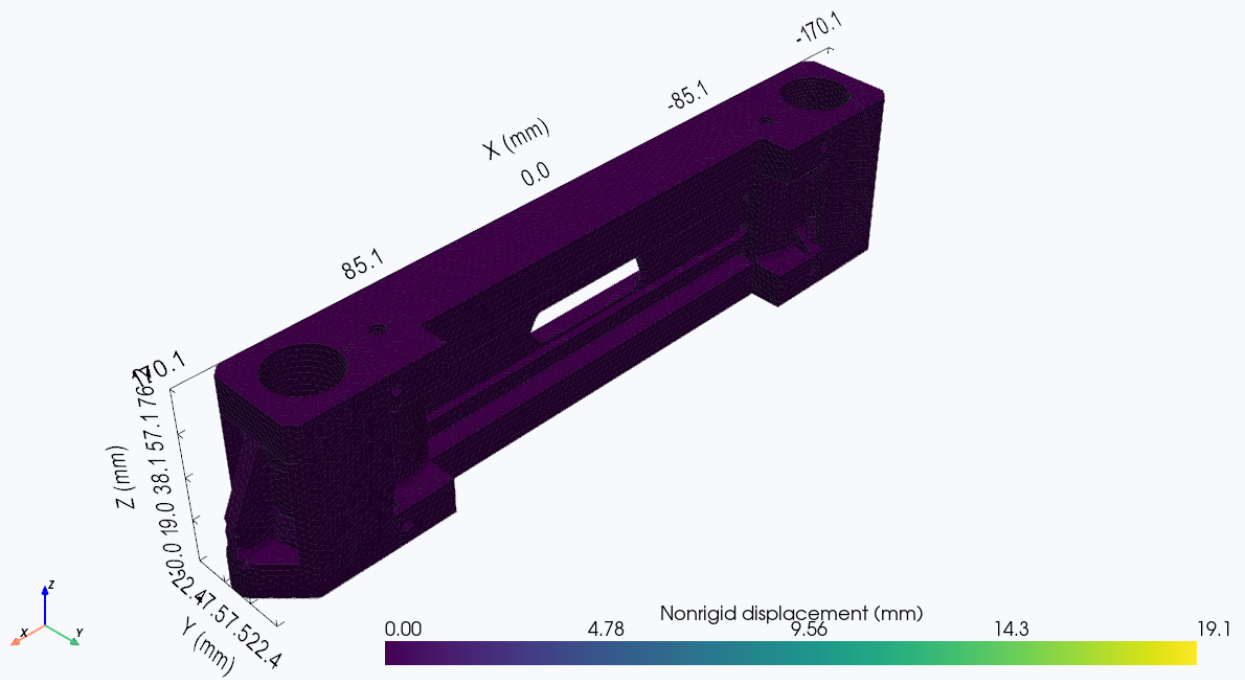


Elastic stress demand / generic foam — no failure prediction

deformation_0001_0.010ms.png

depth6-fine-v3
Rigid motion removed; deformation 1x; original outline gray

t = 0.060 ms

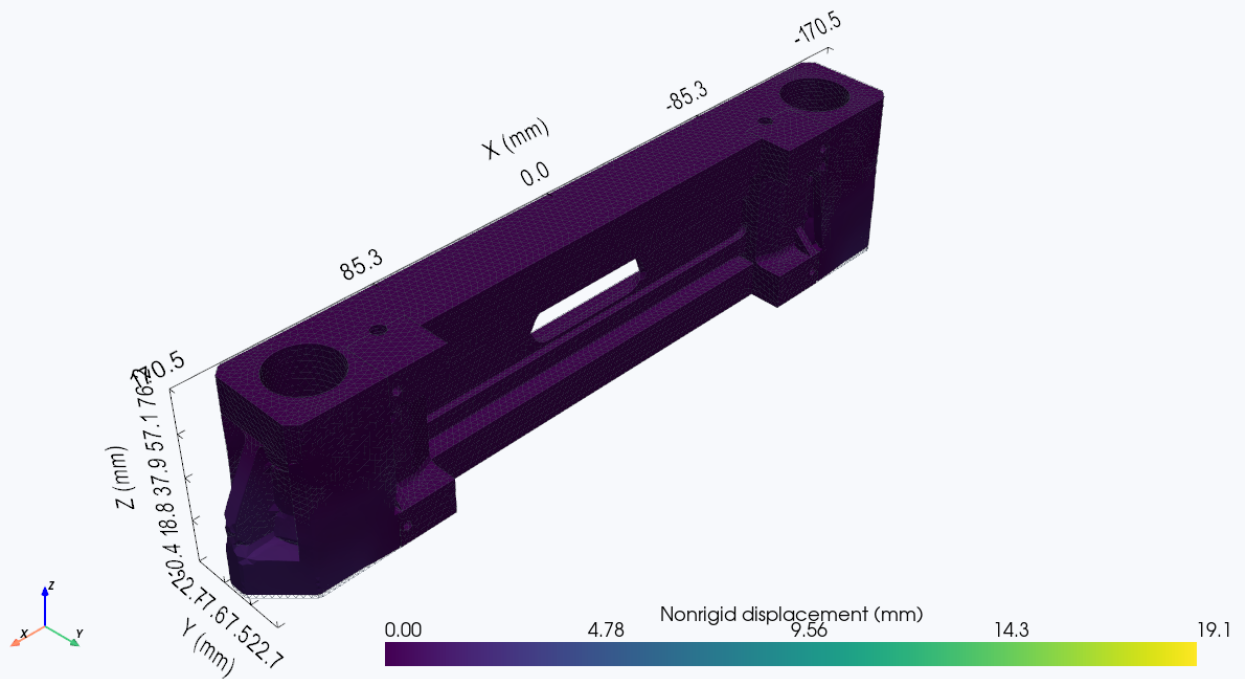


Elastic stress demand / generic foam — no failure prediction

deformation_0006_0.060ms.png

depth6-fine-v3
Rigid motion removed; deformation 1x; original outline gray

t = 0.070 ms

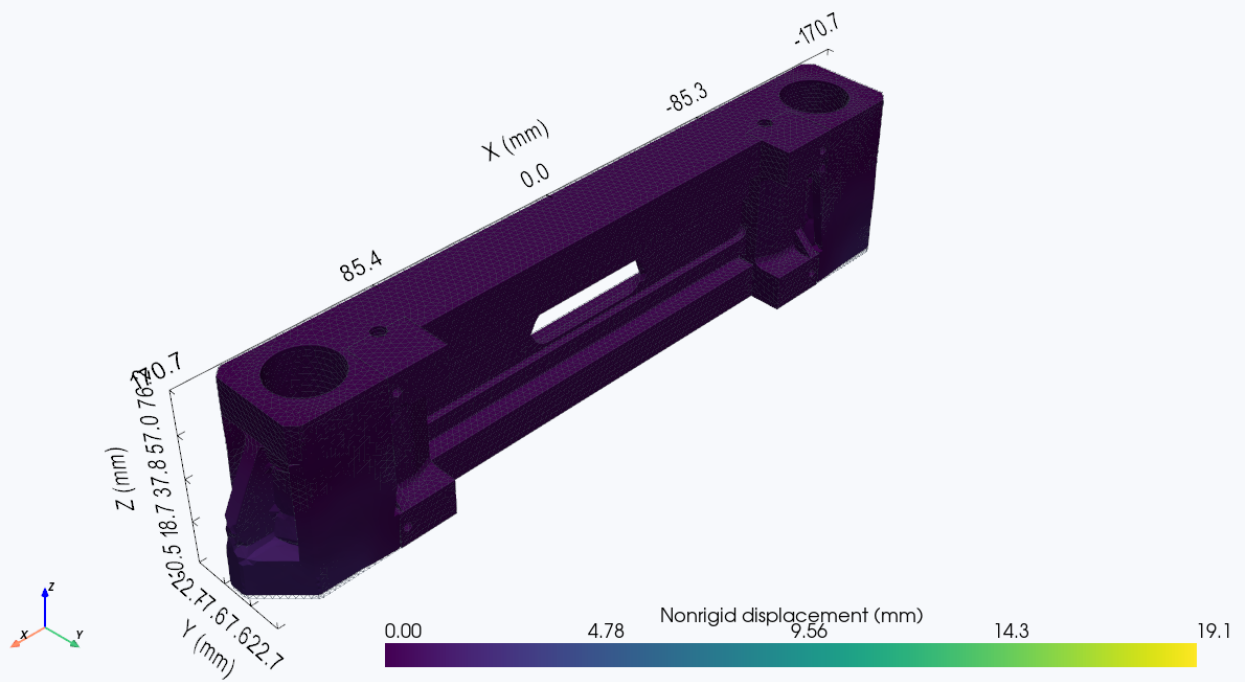


Elastic stress demand / generic foam — no failure prediction

deformation_0007_0.070ms.png

depth6-fine-v3
Rigid motion removed; deformation 1x; original outline gray


t = 0.200 ms

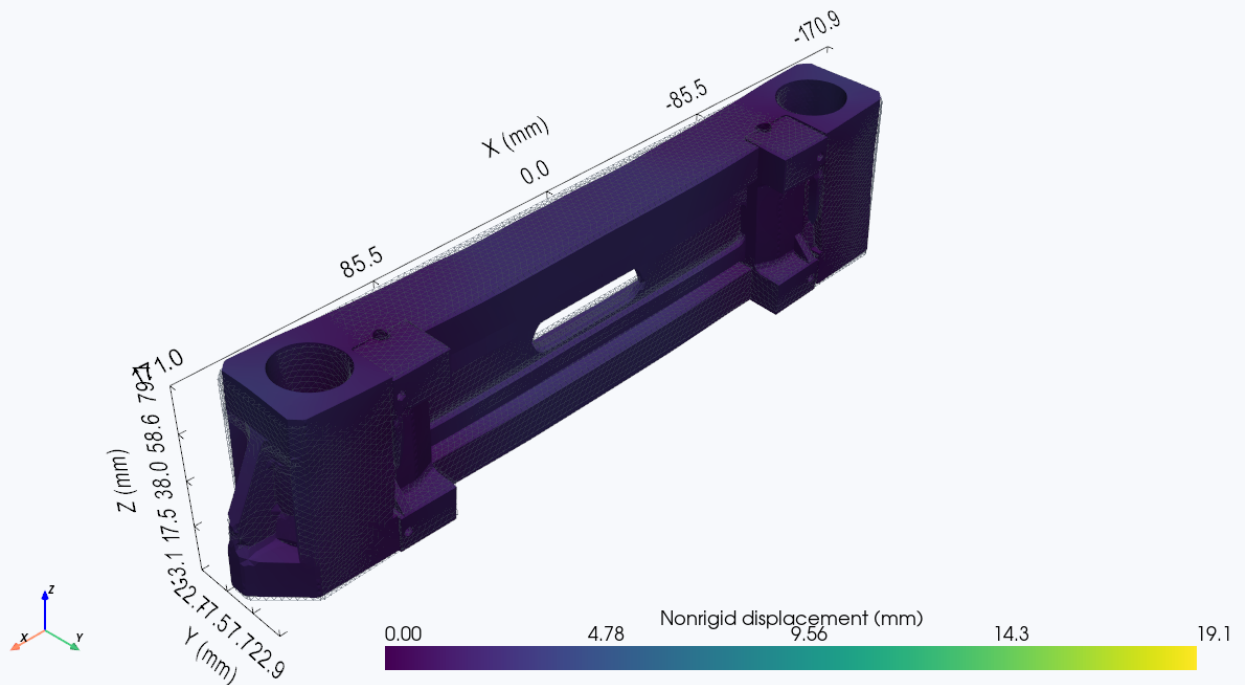

Elastic stress demand / generic foam — no failure prediction

deformation_0020_0.200ms.png


depth6-fine-v3 t = 0.210 ms
 Rigid motion removed; deformation 1x; original outline gray

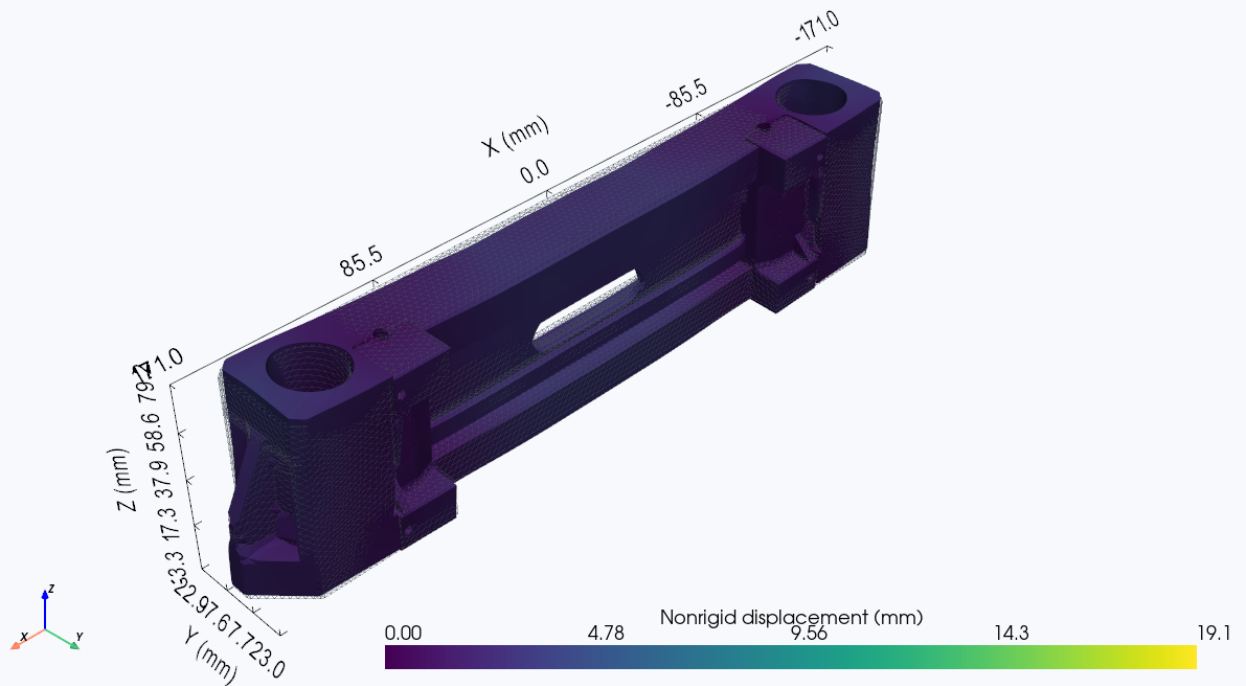

Elastic stress demand / generic foam — no failure prediction

deformation_0021_0.210ms.png


depth6-fine-v3 t = 0.850 ms
 Rigid motion removed; deformation 1x; original outline gray

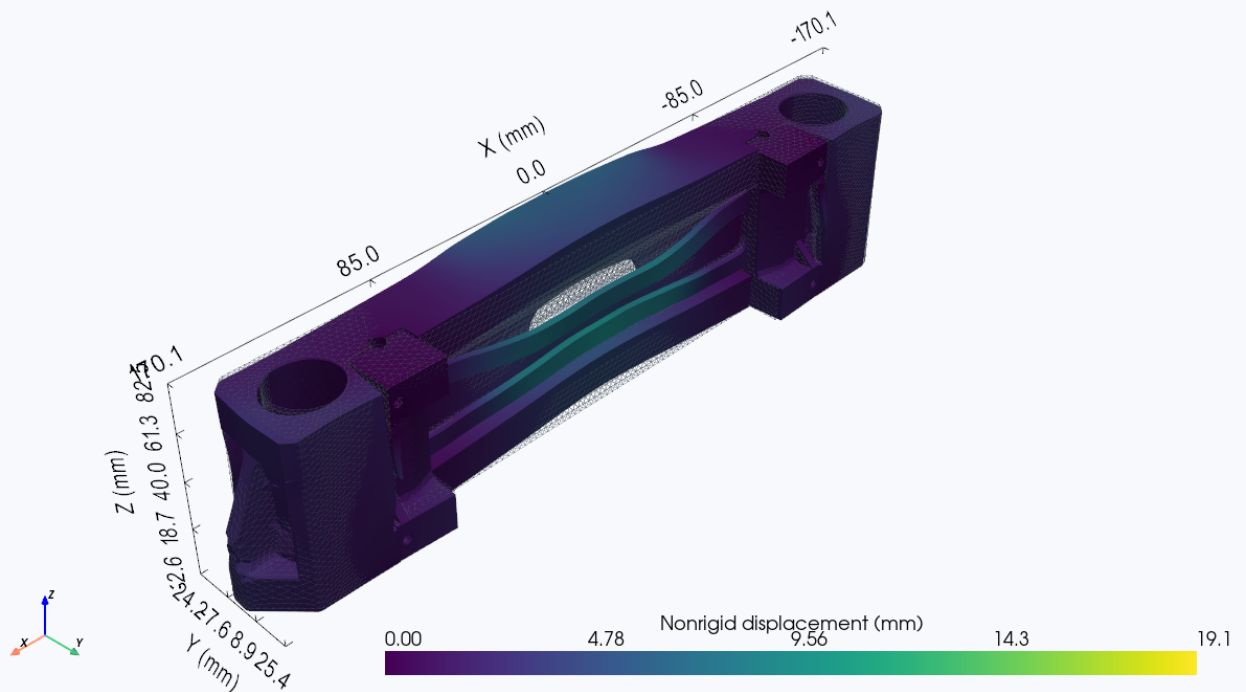

Elastic stress demand / generic foam — no failure prediction

deformation_0085_0.850ms.png


depth6-fine-v3 t = 0.870 ms
 Rigid motion removed; deformation 1x; original outline gray

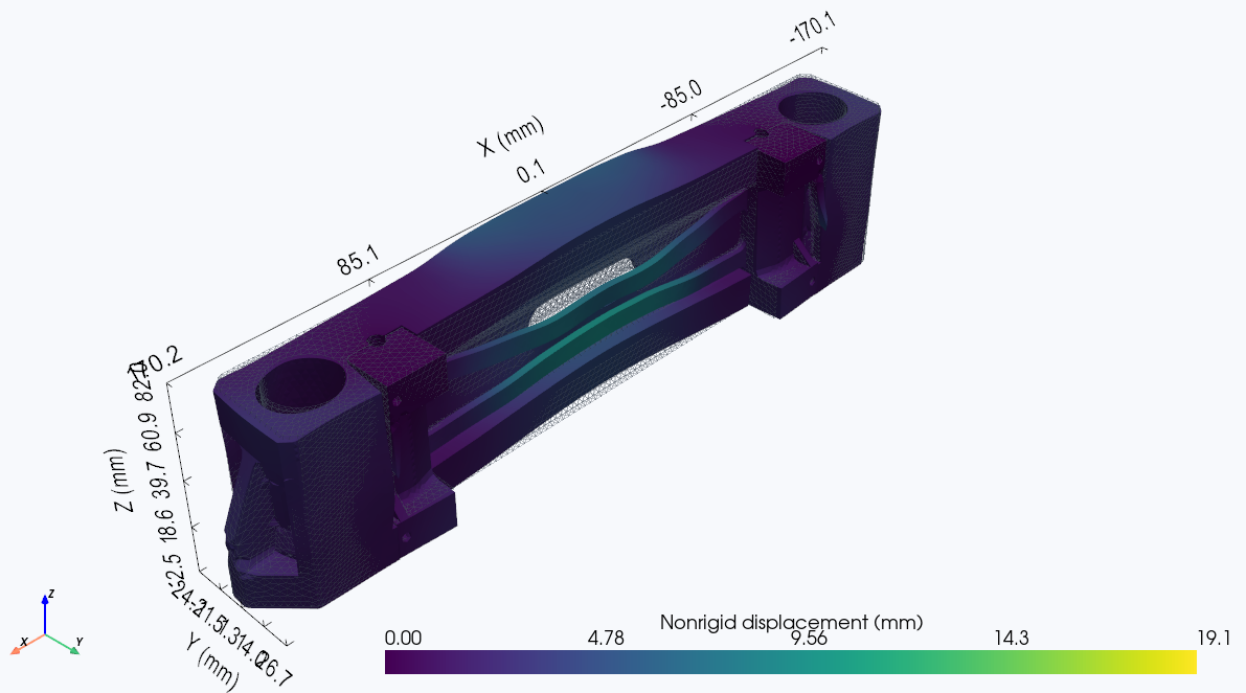

Elastic stress demand / generic foam — no failure prediction

deformation_0087_0.870ms.png

depth6-fine-v3 t = 4.170 ms
 Rigid motion removed; deformation 1x; original outline gray

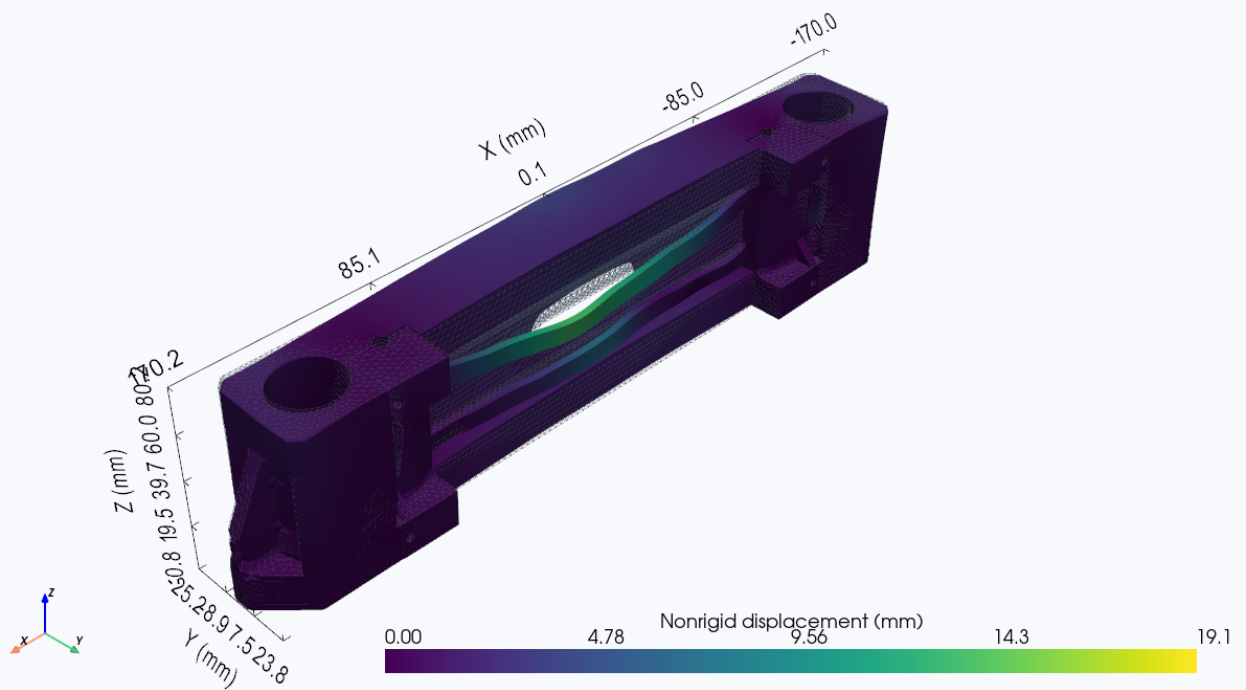


Elastic stress demand / generic foam — no failure prediction

deformation_0417_4.170ms.png


depth6-fine-v3
Rigid motion removed; deformation 1x; original outline gray

t = 4.970 ms

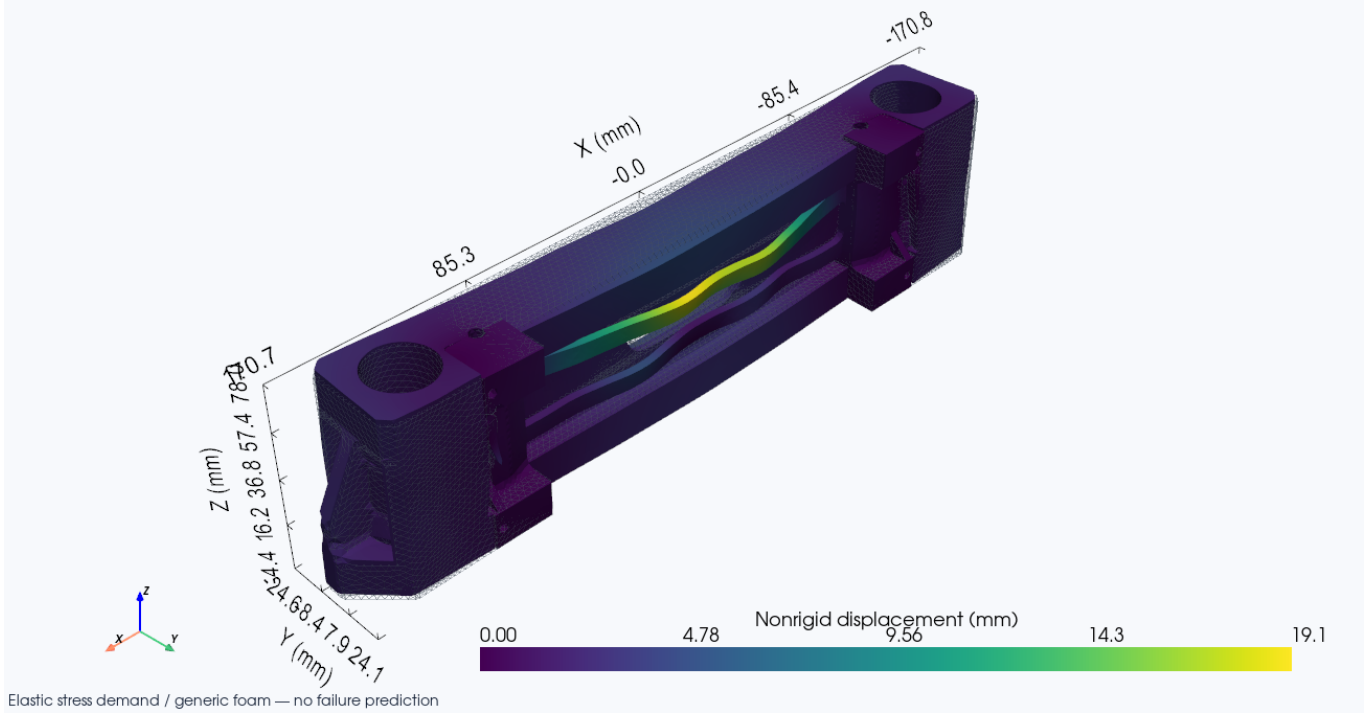


deformation_0497_4.970ms.png

depth6-fine-v3 | comparative elastic pusher / generic foam; no failure prediction

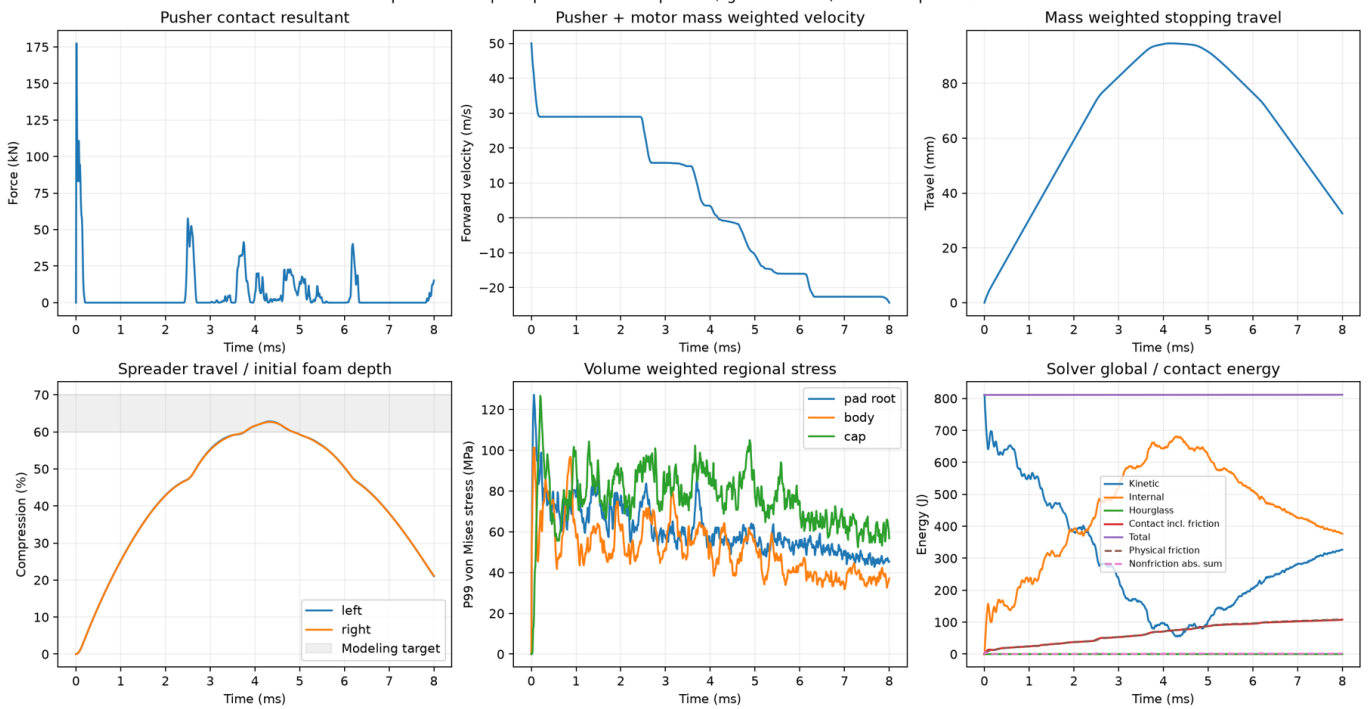


histories.png

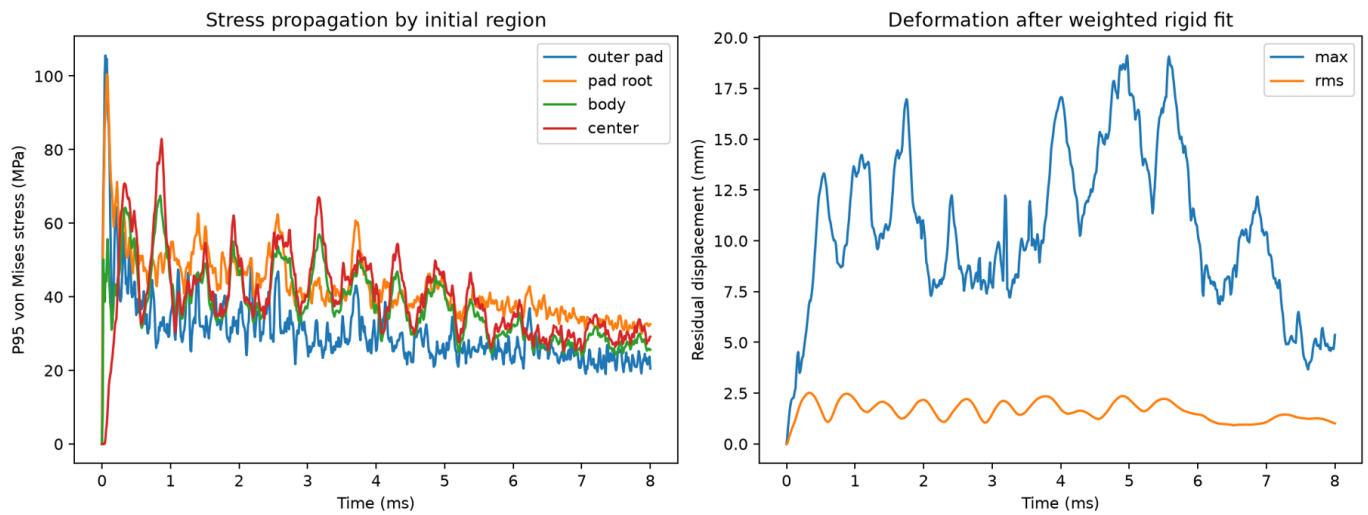


stress-propagation-deformation.png

depth6-fine-v3 $t = 0.010$ ms
Rigid motion removed; deformation 1x; original outline gray

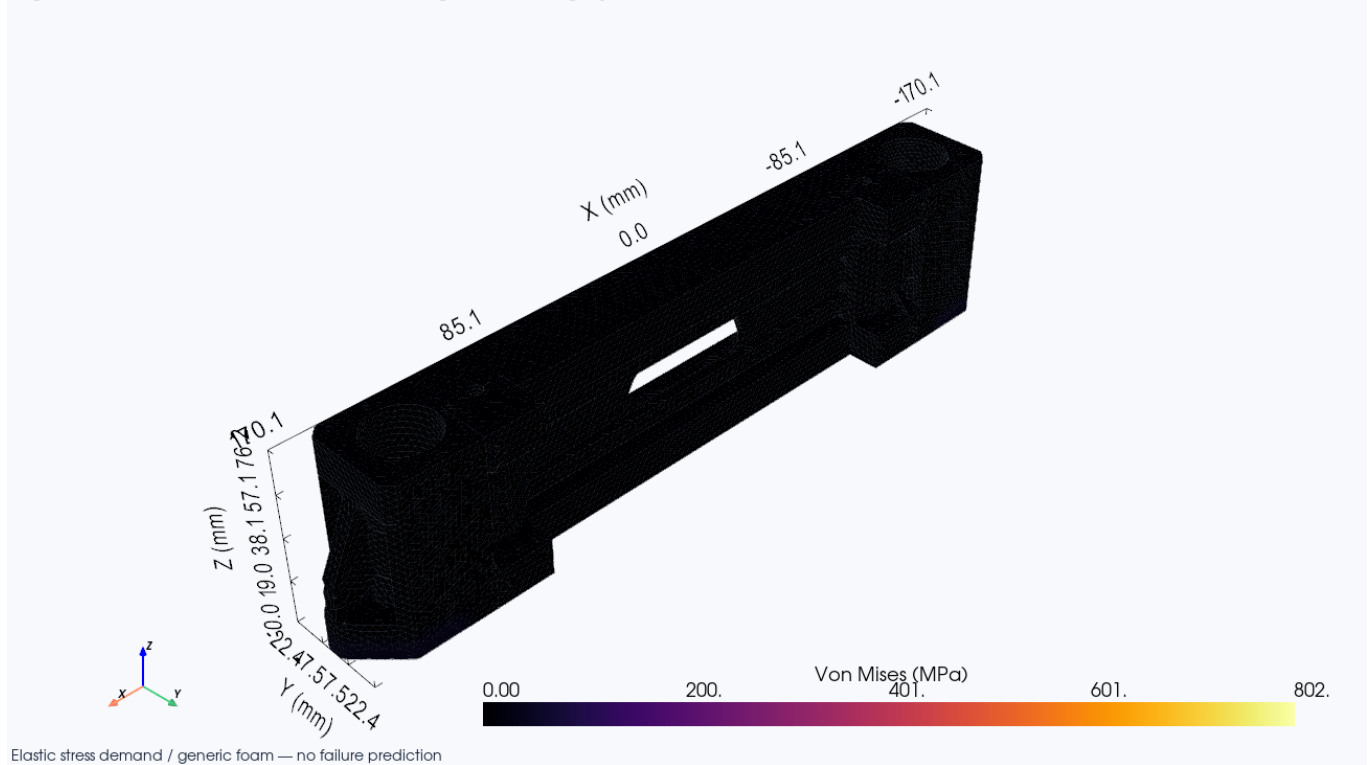

stress_0001_0.010ms.png


depth6-fine-v3 t = 0.060 ms
Rigid motion removed; deformation 1x; original outline gray

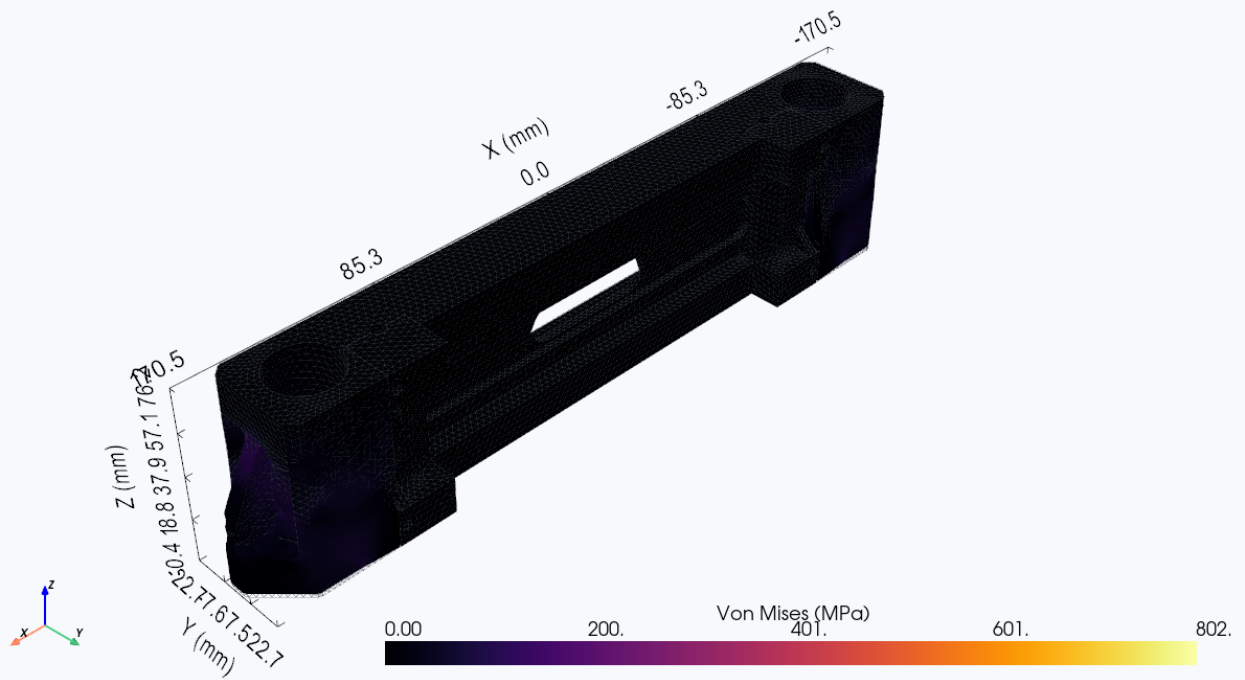

Elastic stress demand / generic foam — no failure prediction

stress_0006_0.060ms.png


depth6-fine-v3 t = 0.070 ms
Rigid motion removed; deformation 1x; original outline gray

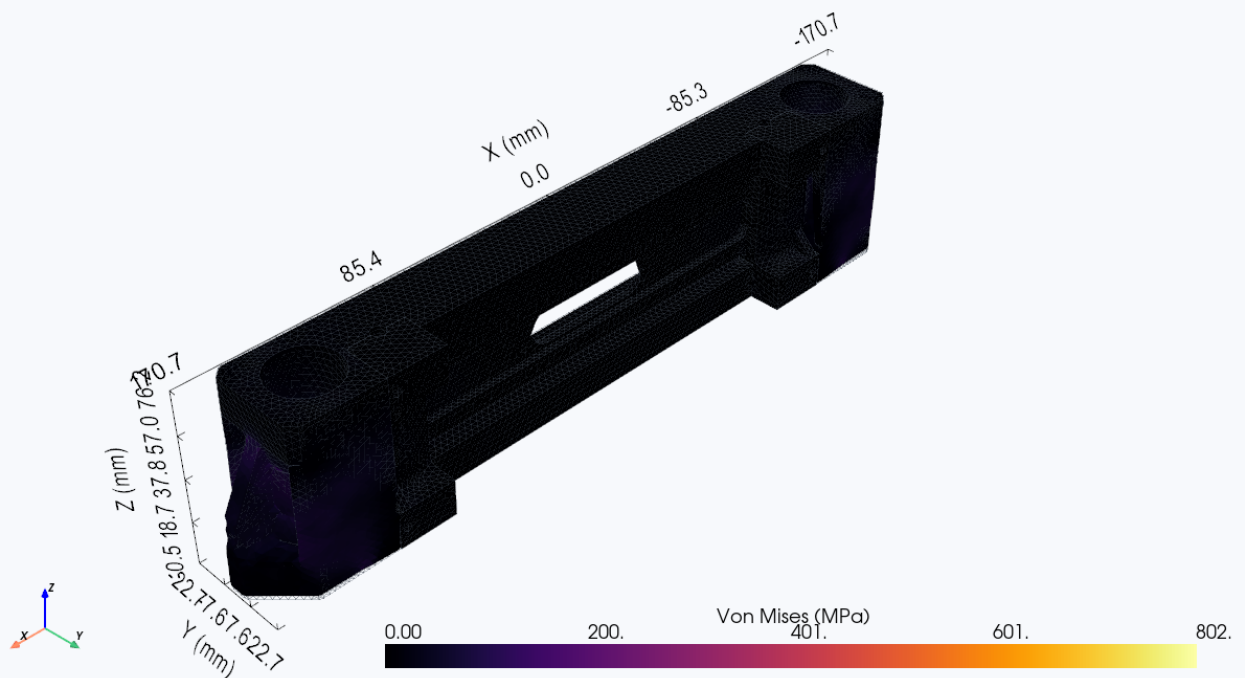

Elastic stress demand / generic foam — no failure prediction


stress_0007_0.070ms.png

depth6-fine-v3 t = 0.200 ms
Rigid motion removed; deformation 1x; original outline gray

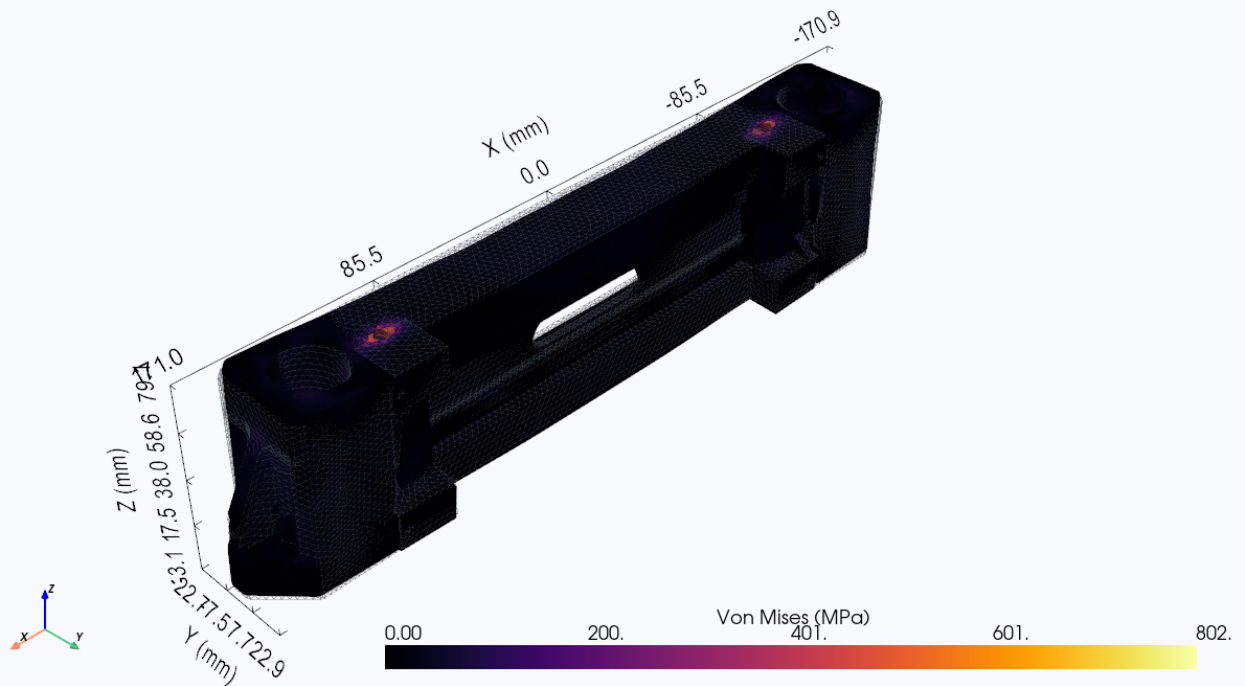


stress_0020_0.200ms.png

depth6-fine-v3 t = 0.210 ms
Rigid motion removed; deformation 1x; original outline gray

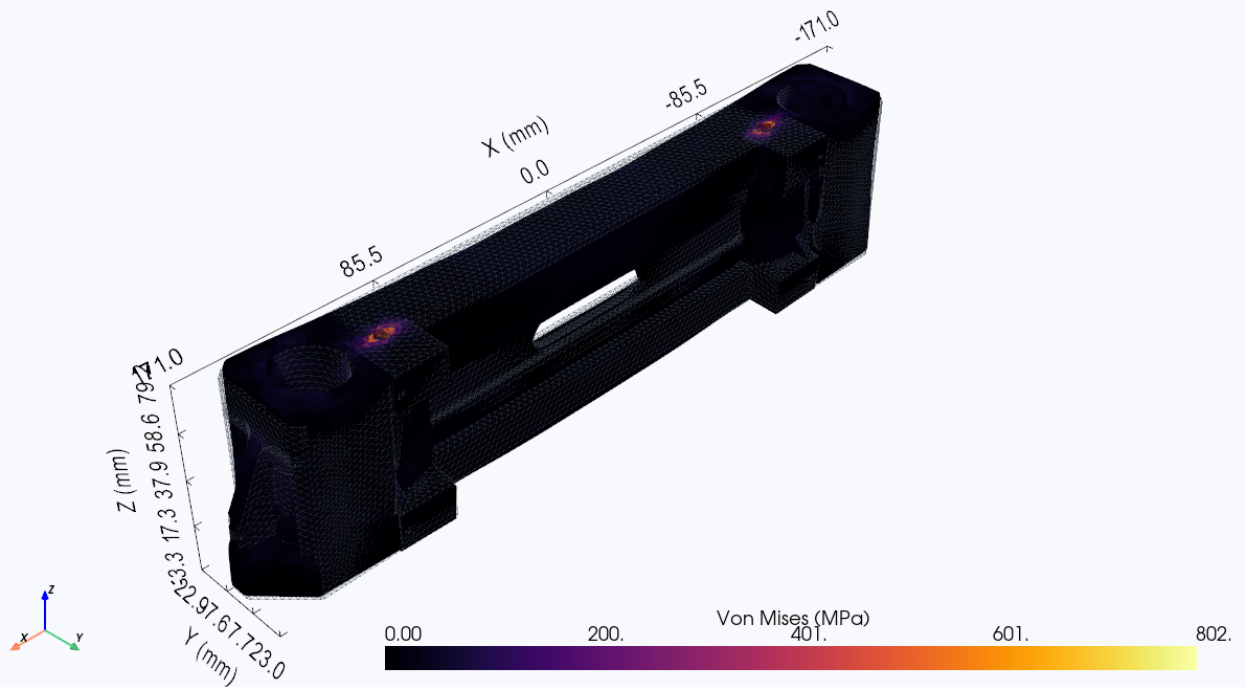

stress_0021_0.210ms.png


depth6-fine-v3 t = 0.850 ms
 Rigid motion removed; deformation 1x; original outline gray

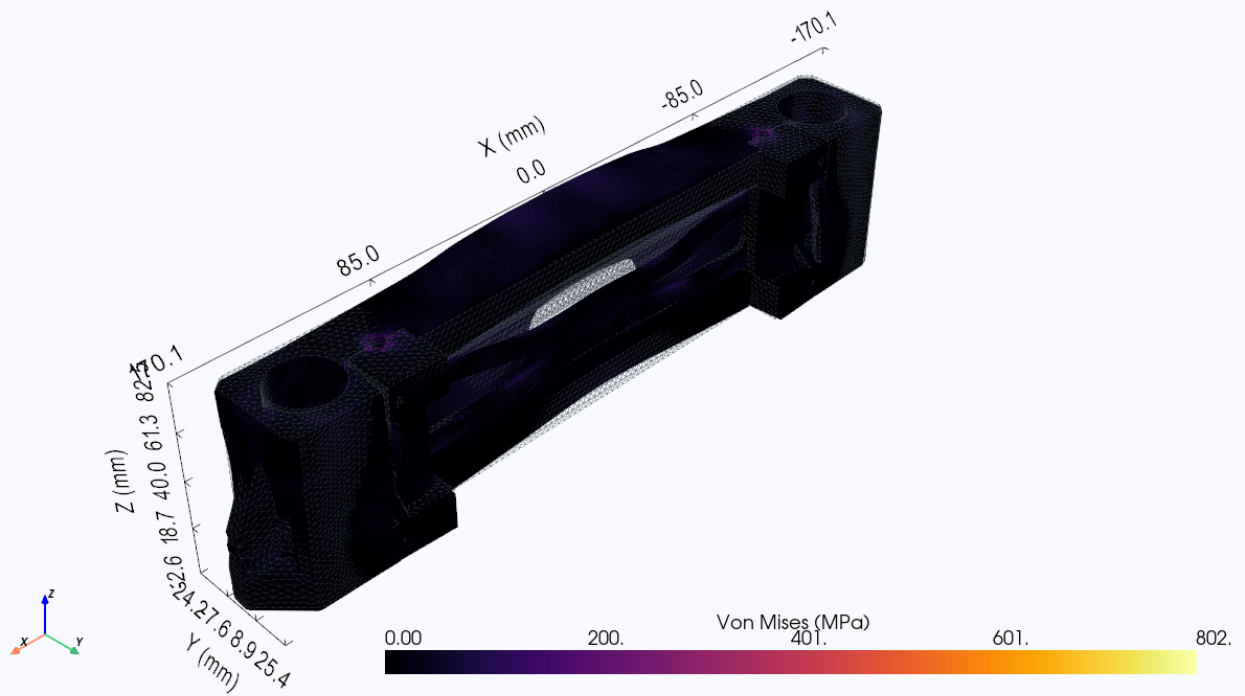

Elastic stress demand / generic foam — no failure prediction

stress_0085_0.850ms.png


depth6-fine-v3 t = 0.870 ms
 Rigid motion removed; deformation 1x; original outline gray

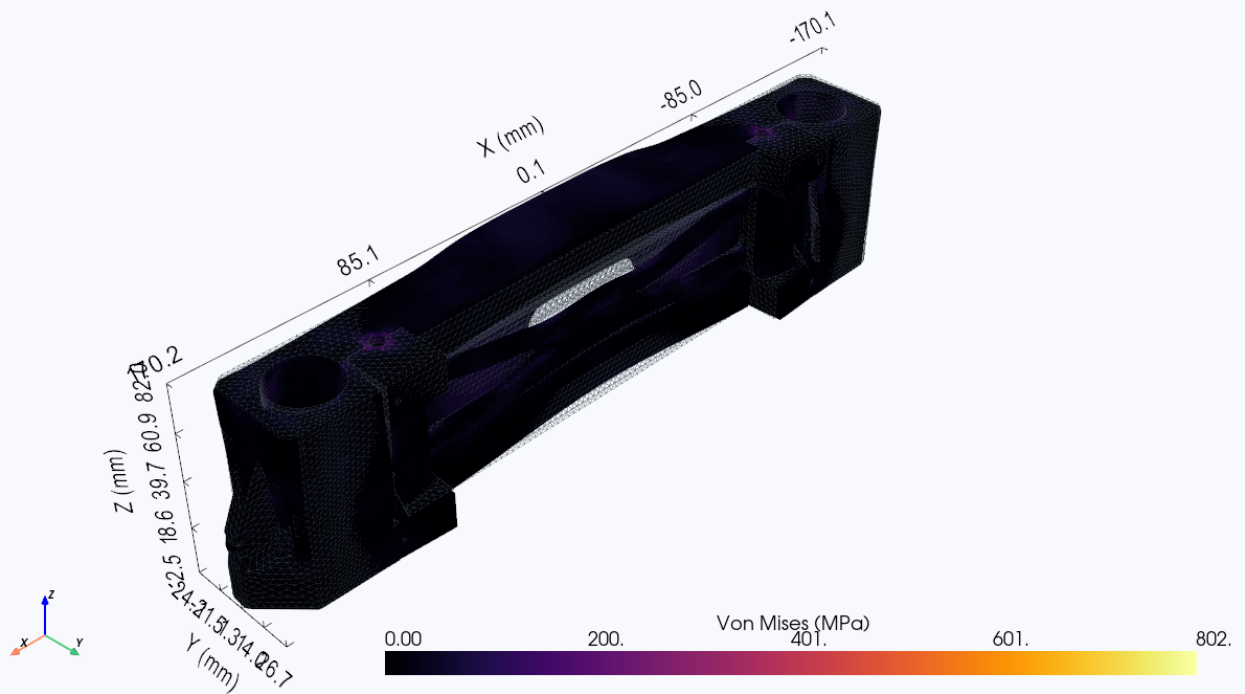

Elastic stress demand / generic foam — no failure prediction

stress_0087_0.870ms.png


depth6-fine-v3 t = 4.170 ms
Rigid motion removed; deformation 1x; original outline gray

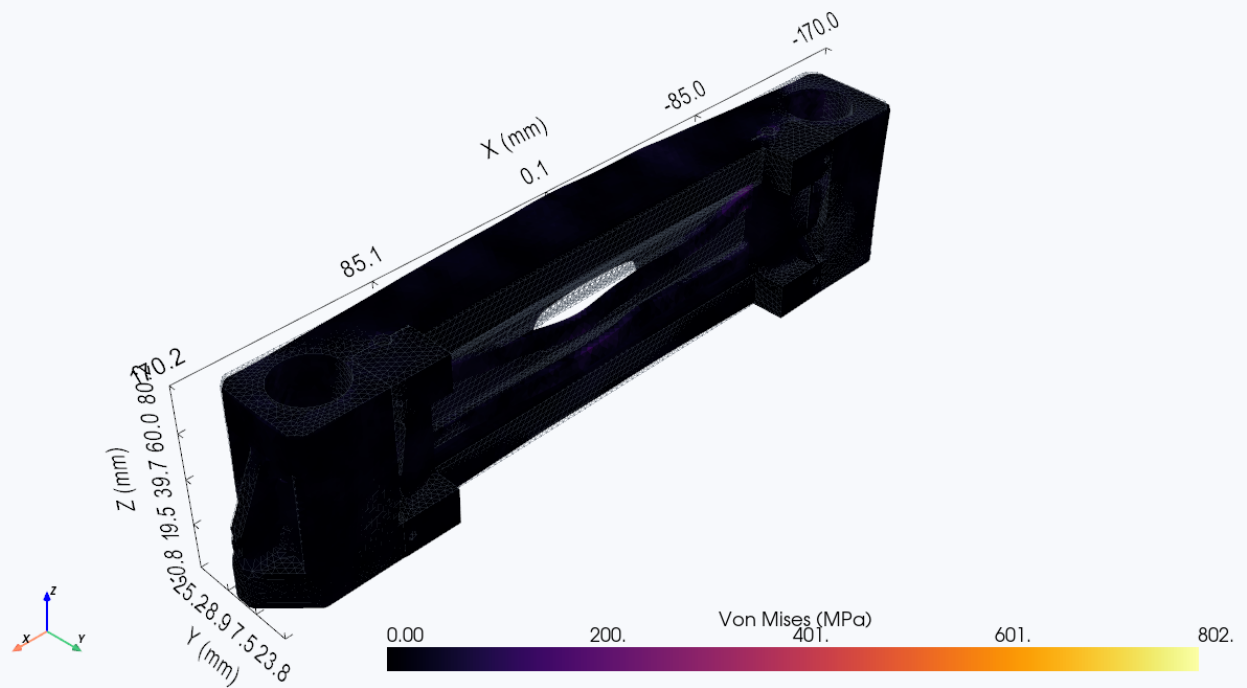

Elastic stress demand / generic foam — no failure prediction

stress_0417_4.170ms.png

depth6-fine-v3 t = 4.970 ms
Rigid motion removed; deformation 1x; original outline gray

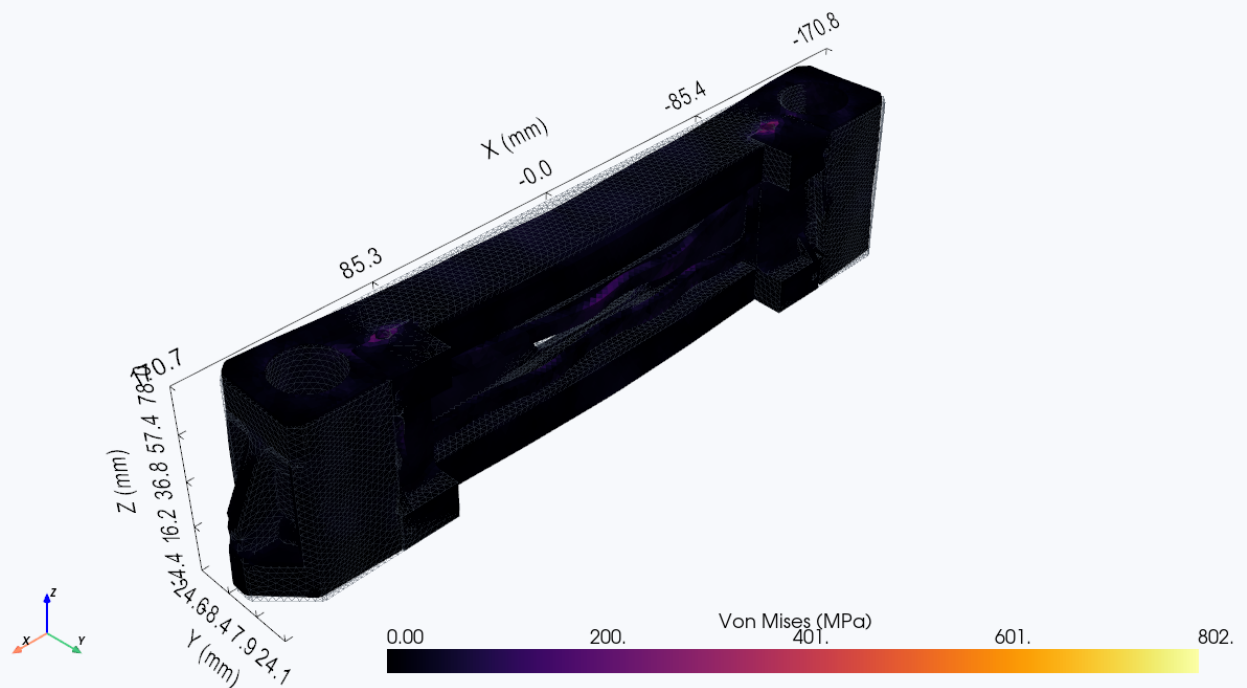

Elastic stress demand / generic foam — no failure prediction

stress_0497_4.970ms.png

- cable_guide_motion.csv
- contact_energy_by_interface.csv

- `contact_energy_components.csv`
- `contact_histories.csv`
- `global_energy_histories.csv`
- `metrics.json`
- `part_energy_histories.csv`
- `sampled_planar_penetration.csv`
- `spc_histories.csv`
- `stress_histories.csv`
- `time_histories.csv`
- `weighted_guide_constraints.csv`

Generated from selected-run extracted evidence; no authored report is available. Animation figures and their captions are excluded from this PDF; animations remain available in the standalone HTML.