RIBBON  34-pin header like a strip; own ground spade; 10R ground cancel to pin 26 (strip-like ground)

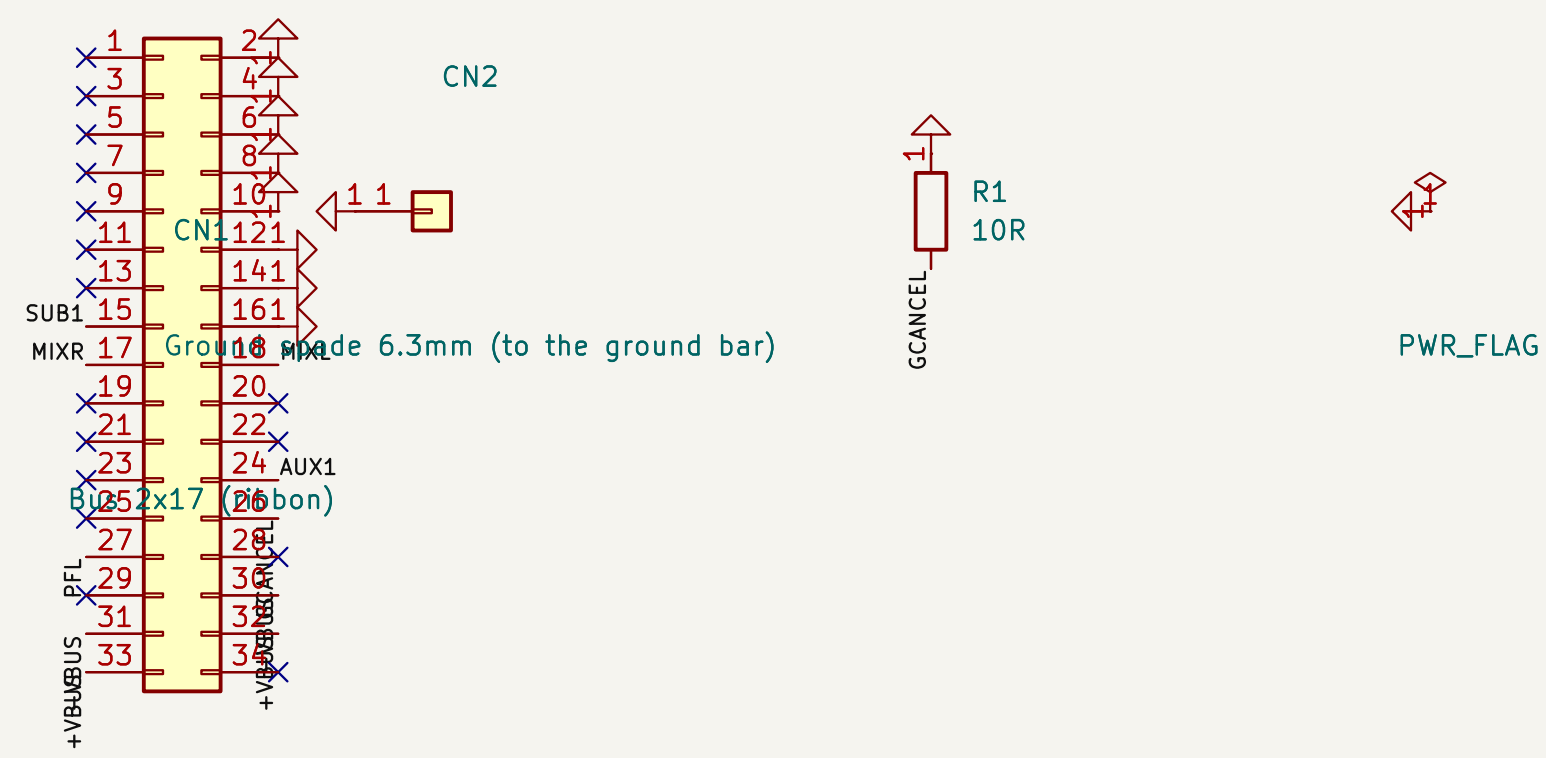

DUMMY CHANNELS  per bus, groups of 1 / 3 / 4 / 12 channels as one equivalent resistor (same noise and noise gain); slide switch at the bus end: on = bus, off = AGND (as the routing switches)

BUS CAPACITANCE  1 nF C0G per MIX / SUB 1 bus on a jumper: the 24 strips' DG413 switches + ribbon (~1.1 nF)

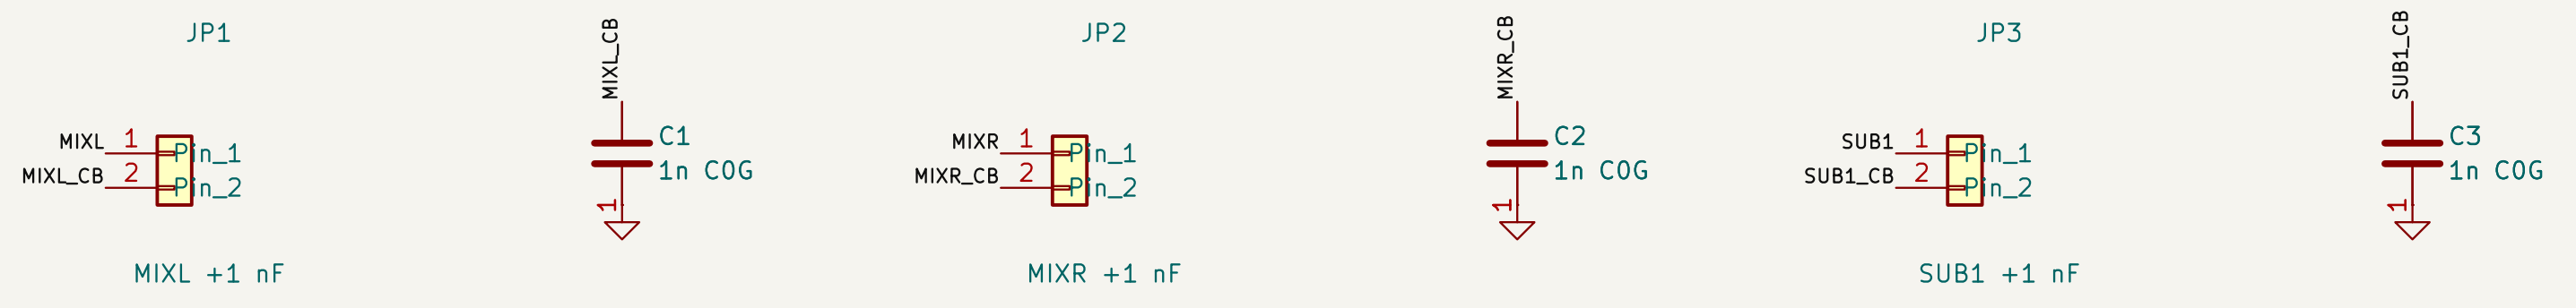

DUMMY WING LOAD  terminal for external power resistors (about 17 R / 20 W per rail = one 12-strip wing, 1 A)



Dummy channels raise the bus noise gain to the 24-channel value
Generated by tools/gen_jig.py from test_jig_spec.md v0.2 (section 3)

Sheet: /
File: jig_load_board.kicad_sch

**Title: Test jig — load board (goa console)**

Size: User
Date: 2026-10-19
**Rev: 0.2**
KiCad E.D.A. 10.0.7
Id: 1/1