


POWER IN bench +−17 V, reverse Schottkys, a PTC per rail to the ribbon, local VA / VL

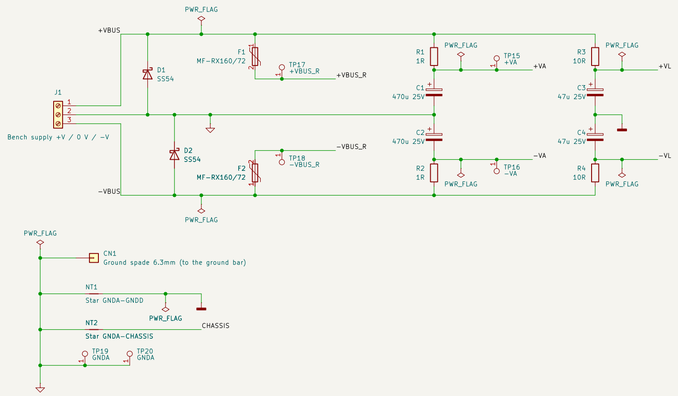

RIBBON 34-pin header, Delta pinout; SUB 2–4 and AUX 3–6 on AGND




GROUND–CANCEL REFERENCE config jumper, 22R tie, buffer

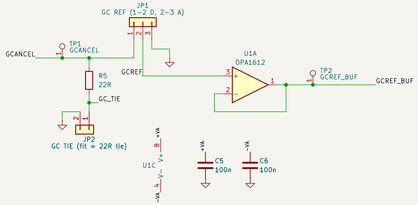


JP1 1–2: config D, ground cancel. 2–3: config A, the stub's own AGND.
JP2 fitted: 22R from GCANCEL to AGND, the master-end tie of test 3.


BUS AMPS bus -> ferrite -> summer (+ on GCREF) -> re-inverter (+ leg on GCREF_BUF) -> 100R -> BNC

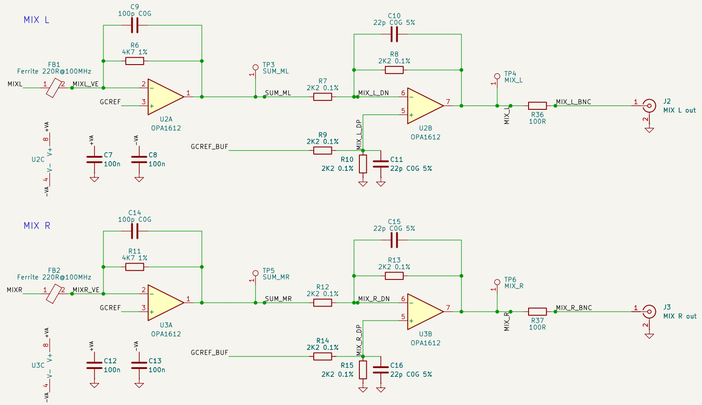

BALANCED OUTPUT MIX L -> DRV135 -> XLR male (test 11)

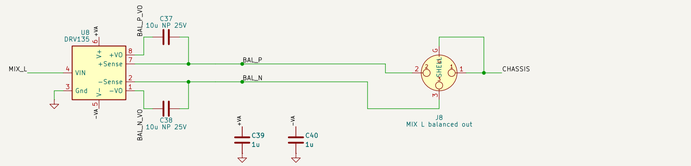

PFL DETECT one press = 0.92 V on PFLDET against 0.50 V; red LED

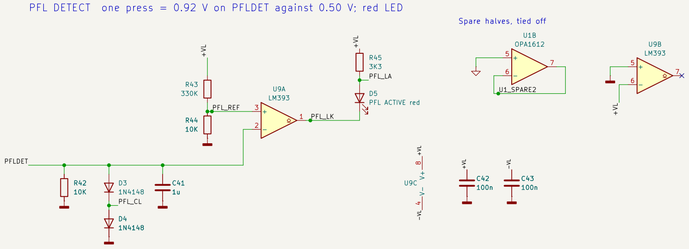

JP1 1–2: config D, ground cancel. 2–3: config A, the stub's own AGND.
JP2 fitted: 22R from GCANCEL to AGND, the master-end tie of test 3.

Bus amps as master_section_spec.md 2, 3, 12, 13, 18: GC REF jumper selects config D or A
Generated by tools/gen_jig.py from test_jig_spec.md v0.3 (section 2)

Sheet: /	
File: jig_master_stub.kicad_sch	
Title: Test jig — master stub (goa console)	
Size: User	Date: 2026-10-19
KiCad E.D.A. 10.0.7	**Rev: 0.3**
	Id: 1/1