MICRO-OHM CORPORATION

TEMPERATURE SENSITIVE
Precision Film Temperature Sensor
Type LPTC

FEATURES:

Fast Response Time: Ceramic core and film which are superb in temperature conductivity. Miniaturization also helps to quicken the response time to temperature.

Reliability: By very unique production methods, even after the life test, the resistance change and T.C. change are very small and highly reliable.


Accuracy: Tolerance of resistance value is ±2%, ±5% & ±10%. T.C.R. is from 1000ppm/°C to 5100ppm ±10%.

Compatibility: Because of high reliability and preciseness, it is highly compatible with most other sensors.

Linearity: It shows good linear curve in the temperature of -30°C ~+ 130°C.

Automatic Insertion: Convenient for automatic insertion because it is in a same configuration as regular resistors and saves P.C. board space.

Higher Ohmic Value: High values are now available due to laser beam trimming.

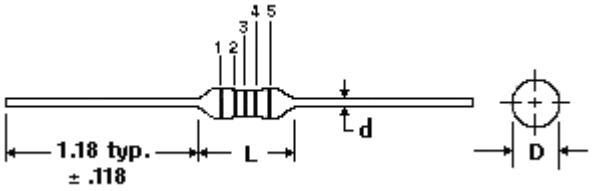

M-O P/N	Wattage (70°C)	Size (mm)			Resistance Range (ohm)	Temp.Coef. Range PPM/°C	Tol.	T.C.R. Tol.	V
		L	D	d					
LPTC12	1/6 (.16)	3.7	1.9	0.45	1.0~2.2K	1000~3900	±2% ±5% ±10%	±15%	200
LPTC25	1/4 (0.25)	7	2.5	0.6	1.0~3.0K	1000~4000	±2% ±5% ±10%	±15%	250

Color Coding (JIS-0802)

1 2 The first two digits are significant figures of nominal resistance value.

3 The third digit denotes number of zeros following.

4 5 The last two digits denote T.C.R.

Temp. Coef. Code (ppm)

T-1 2500

T-2 3000

T-3 3500

T-4 4000

How to Order

Example: 1/6w 3500ppm 1k 5%

LPTC12	T3	1001	J
P/N	T.C.	Resistance 4 digit <100 use R for decimal. >100 4th digit is multiplier	J=5% K=10%



Resistor Color Code Reader

How to Order Micro-Ohm Resistors

TO ORDER PRODUCTS

E mail: microohm@vividnet.com

Call Toll Free: 1-800-845-5167