
VCC LED Lenses and Mounting Components

RoHS Compliant. This page of product is RoHS compliant.

CLIPLITE® ROUND LENS MOUNTS FOR T1 AND T1-3/4 LEDS

Features:
- Provides 180° viewing angles for LEDs
- Easy snap-mount method for front panel assembly
- ESD protection for LED and internal components to 16K volts
- Lens utilize striated lines and fresnel rings to increase apparent brightness up to 125%

Specifications:
- Lens material: Polycarbonate

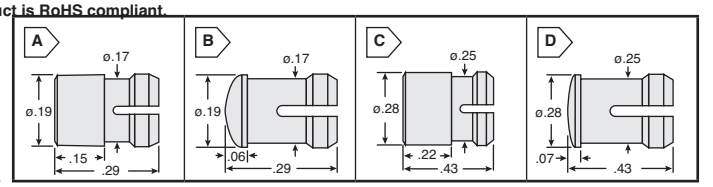

DIMENSIONS: in.

T1 (3mm)

For quantities greater than listed, call for quote.

MOUSER STOCK NO.	VCC Part No.	Fig.	Mounting Hole: in.	Lens Color	Price Each 1	10	100	500
SML Series - Standard Height								
593-1900R	SML190RTP	A	.171	Red	.28	.24	.22	.17
593-1900A	SML190ATP	A	.171	Amber	.28	.24	.22	.17
593-1900Y	SML190YTP	A	.171	Yellow	.28	.24	.22	.17
593-1900G	SML190GTP	A	.171	Green	.28	.24	.22	.17
593-1900B	SML190BTP	A	.171	Blue	.28	.24	.22	.17
593-1900C	SML190CTP	A	.171	Clear	.28	.245	.225	.173
593-1900GLO	SML190GLO	A	.171	White Frosted	.39	.34	.30	.24
SMB Series - Low Profile								
593-2000R	SMB200RTP	B	.171	Red	.28	.24	.22	.17
593-2000A	SMB200ATP	B	.171	Amber	.28	.24	.22	.17
593-2000Y	SMB200YTP	B	.171	Yellow	.28	.24	.22	.17
593-2000G	SMB200GTP	B	.171	Green	.28	.24	.22	.17
593-2000B	SMB200BTP	B	.171	Blue	.28	.24	.22	.17
593-2000C	SMB200CTP	B	.171	Clear	.28	.24	.22	.17
593-2000GLO	SMB200GLO	B	.171	White Frosted	.39	.34	.30	.24


T1-3/4 (5mm)

For quantities greater than listed, call for quote.

MOUSER STOCK NO.	VCC Part No.	Fig.	Mounting Hole: in.	Lens Color	Price Each 1	10	100	500
CLF Series - Standard Height								
593-2800R	CLF280RTP	C	.25	Red	.31	.26	.24	.19
593-2800A	CLF280ATP	C	.25	Amber	.31	.26	.24	.19
593-2800Y	CLF280YTP	C	.25	Yellow	.31	.26	.24	.19
593-2800G	CLF280GTP	C	.25	Green	.31	.26	.24	.19
593-2800B	CLF280BTP	C	.25	Blue	.31	.27	.25	.19
593-2800C	CLF280CTP	C	.25	Clear	.31	.26	.24	.19
593-2800GLO	CLF280GLO	C	.25	White Frosted	.43	.37	.33	.26
CLB Series - Low Profile								
593-3000R	CLB300RTP	D	.25	Red	.31	.26	.24	.19
593-3000A	CLB300ATP	D	.25	Amber	.31	.26	.24	.19
593-3000Y	CLB300YTP	D	.25	Yellow	.31	.26	.24	.19
593-3000G	CLB300GTP	D	.25	Green	.31	.26	.24	.19
593-3000B	CLB300BTP	D	.25	Blue	.31	.26	.24	.19
593-3000C	CLB300CTP	D	.25	Clear	.31	.27	.25	.19
593-3000GLO	CLB300GLO	D	.25	White Frosted	.43	.37	.33	.26

CUBELITE® SQUARE LENS MOUNTS FOR T1 AND T1-3/4 LEDS

DIMENSIONS: in.

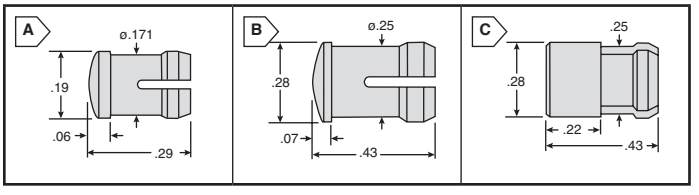


For quantities greater than listed, call for quote.

MOUSER STOCK NO.	VCC Part No.	Fig.	Litepipe Length: in.	Price Each 1	10	100	500
T1 (3mm) SMQ Series							
593-2500R	SMQ250RTP	A	Red	.28	.24	.22	.17
593-2500A	SMQ250ATP	A	Amber	.28	.25	.23	.17
593-2500Y	SMQ250YTP	A	Yellow	.28	.25	.23	.17
593-2500G	SMQ250GTP	A	Green	.28	.24	.22	.17
593-2500B	SMQ250BTP	A	Blue	.28	.25	.23	.17
593-2500C	SMQ250CTP	A	Clear	.28	.24	.22	.17
T1-3/4 (5mm) SQB Series							
593-4000R	SQB400RTP	B	Red	.31	.26	.24	.19
593-4000A	SQB400ATP	B	Amber	.31	.26	.24	.19
593-4000Y	SQB400YTP	B	Yellow	.31	.27	.25	.19
593-4000G	SQB400GTP	B	Green	.31	.27	.25	.19
593-4000B	SQB400BTP	B	Blue	.31	.26	.24	.19
593-4000C	SQB400CTP	B	Clear	.31	.26	.24	.19
T1-3/4 (5mm) SQL Series							
593-3600R	SQL360RTP	C	Red	.31	.27	.25	.19
593-3600A	SQL360ATP	C	Amber	.31	.27	.25	.19
593-3600Y	SQL360YTP	C	Yellow	.31	.27	.25	.19
593-3600G	SQL360GTP	C	Green	.31	.27	.25	.19
593-3600B	SQL360BTP	C	Blue	.31	.27	.25	.19
593-3600C	SQL360CTP	C	Clear	.31	.26	.24	.19

RETAINING RINGS, MOUNTING CLIPS, AND SPACERS FOR LENSES

DIMENSIONS: in.

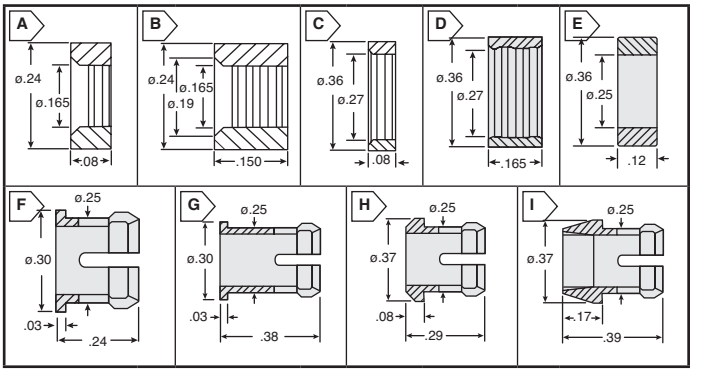

For quantities greater than listed, call for quote.


MOUSER STOCK NO.	Fig.	Description	Price Each 1	10	100
Retaining Rings					
593-RNG132	A	For SMC Series	.18	.147	.13
593-RNG165	B	For SML, SMB, and SMQ Series	.13	.111	.099
593-RNG234	C	For CMC Series	.13	.111	.099
593-RNG268	D	For CLF, CLB, and SQB Series	.13	.111	.099
LED Space					
593-SPC125	E	Spacer for CLB Series	.11	.09	.08
Mounting Clips					
593-CLP125	F	Standard Clip	.17	.141	.126
593-CLP126	G	Extended Clip	.17	.141	.126
593-CLP127	H	Outer Reflector Clip	.17	.141	.126
593-CLP129	I	Inner Reflector Clip	.17	.141	.126

PCB STANDOFFS FOR BI AND TRI-LEAD COMPONENTS


Standoffs are designed for printed circuit board mounting of multi-lead devices ie. LEDs. They cope with various problems in mounting passive components. They include height control, lateral stability, lead retention, lead shorting, and solder flux removal. Device height control is simplified with mounts ranging in lengths from .12" to 1.0"

- Material: thermoplastic (black) UL 94V-0

DIMENSIONS: in.



Retention tabs hold LED leads in position prior to final PCB board assembly.



.12" to .48" Lengths Price Each 1	10	100	500
.17	.144	.13	.101

.50" to 1.0" Lengths Price Each 1	10	100	500
.18	.159	.34	.27

MOUSER STOCK NO.	Length: in.
593-STD120B	.12
593-STD140B	.14
593-STD160B	.16
593-STD180B	.18
593-STD200B	.20

MOUSER STOCK NO.	Length: in.
593-STD220B	.22
593-STD240B	.24
593-STD250B	.25
593-STD260B	.26
593-STD280B	.28

MOUSER STOCK NO.	Length: in.
593-STD300B	.30
593-STD320B	.32
593-STD340B	.34
593-STD360B	.36
593-STD380B	.38

MOUSER STOCK NO.	Length: in.
593-STD400B	.40
593-STD420B	.42
593-STD440B	.44
593-STD460B	.46
593-STD480B	.48

MOUSER STOCK NO.	Length: in.
593-STD500B	.50
593-STD550B	.55
593-STD600B	.60
593-STD650B	.65
593-STD700B	.70

MOUSER STOCK NO.	Length: in.
593-STD750B	.75
593-STD800B	.80
593-STD850B	.85
593-STD900B	.90
593-STD950B	.95
593-STD1.0B	1.0

© Copyright 2013 Mouser Electronics

© Copyright 2013 Mouser Electronics