



# **Air-Quality Detection Module**

**(Model: ZP01-MP503)**

## **User's Manual**

Version: 1.4

Valid from 2014-11-01

Zhengzhou Winsen Electronics Technology Co., Ltd  
ISO9001 Certificated Company

# Statement

This manual's copyright belongs to Zhengzhou Winsen Electronics Technology Co., LTD.

Without the written permission, any part of this manual shall not be copied, translated, stored in database or retrieval system, also can't spread through electronic, copying, record ways.

Thanks for purchasing our product. In order to let customers use it better and reduce the faults caused by misuse, please read the manual carefully and operate it correctly in accordance with the instructions. If users disobey the terms or remove, disassemble, change the components inside of the sensor, we shall not be responsible for the loss.

The specific such as color, appearance, sizes &etc., please in kind prevail.

We are devoting ourselves to products development and technical innovation, so we reserve the right to improve the products without notice. Please confirm it is the valid version before using this manual. At the same time, users' comments on optimized using way are welcome.

Please keep the manual properly, in order to get help if you have questions during the usage in the future.

**Zhengzhou Winsen Electronics Technology CO., LTD.**

**May 1<sup>st</sup>, 2014**

# ZP01-MP503 Air-Quality Detection Module



## **Product Description**

ZP01-MP503 air-quality module adopts flat surface semiconductor gas sensor. The module has very high sensitivity to volatile organic gases such as formaldehyde, benzene, carbon monoxide, ammonia, hydrogen, alcohol and smoke of cigarette, essence &etc. The module has been aging, debugged, adjusted and calibrated. So it has good consistency and high sensitivity.

## **Features**


High sensitivity and good long-term stability  
Low power consumption, long life  
Calibrated before shipment  
10 seconds to 3 minutes with auto-preheating function  
Faulty auto-check  
High cost-effective

## **Application**


Air cleaner, fresh-air system, intelligent integrated ceiling, air quality monitor, ventilator, air-condition.

## Parameters

Model	ZP01-MP503
Sensor	Air quality sensor
Target Gas	formaldehyde, benzene, carbon monoxide, hydrogen, alcohol, ammonia, smoke of cigarette, essence &etc.
Physical Interface	XH2.54-4P terminal sockets
Output Data	0—3 grade pollution signal
Working Voltage	5.0±0.2V DC (No voltage reverse connect protection)
Output Data	TTL level (200ohm protected resistance inside)
Working Current	≤60mA
Warm Up Time	≤3 min
Response Time	≤20s
Recovery Time	≤60s
Operating Temperature	0~50℃
Operating Humidity	≤95%RH
Storage Temperature	-20~60℃
Storage Humidity	≤60%RH
Size	24x20x15mm (LxWxH)
Weight	≤ 20g
Sensitivity Attenuator	≤1%/year
Life Span	≥5 years

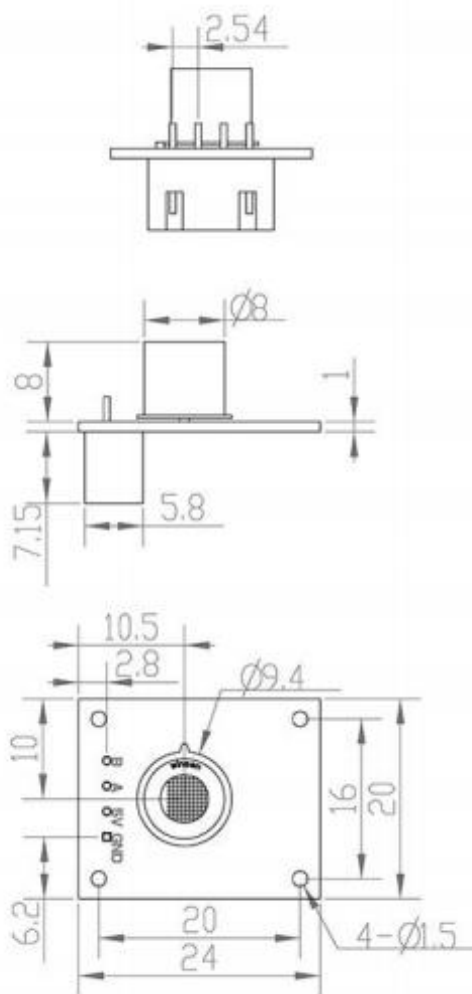


## Sensitivity Characteristics

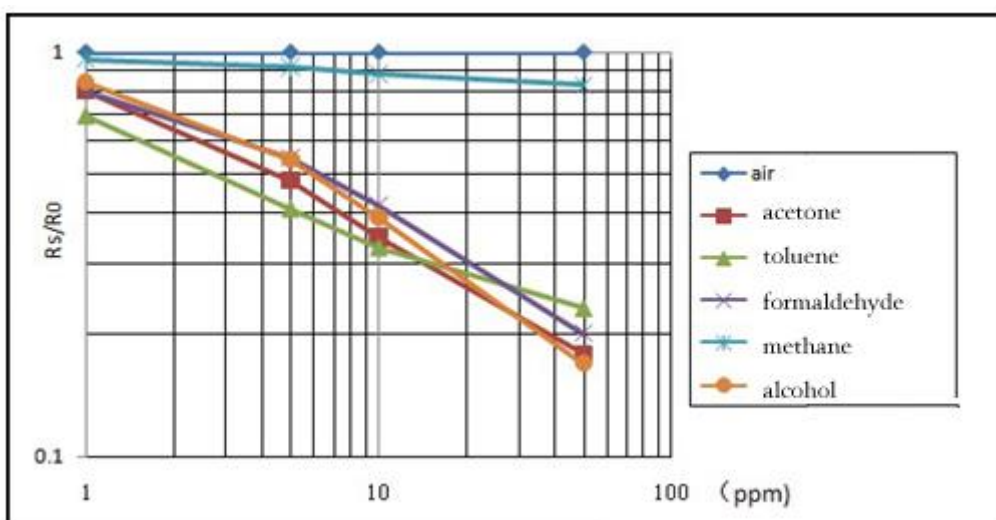

Contrast of the sensitivity in different gases

## Application of schematic diagram

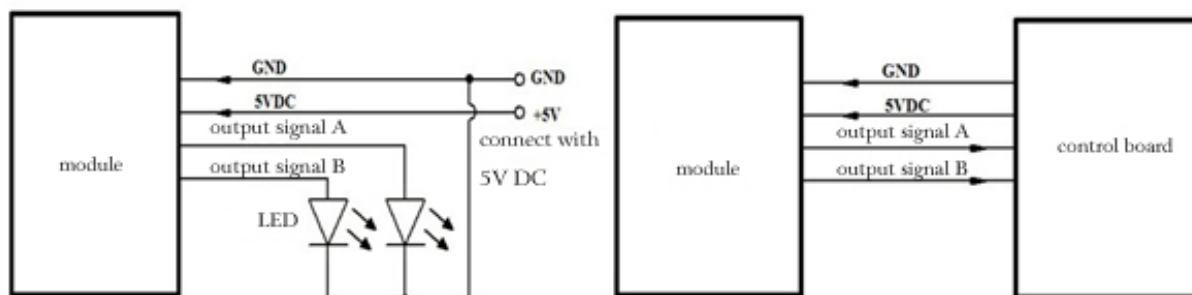

## Pin definition

Pin	Name	Function
1	GND	Input power -
2	5V	Input power +
3	A	Output A
4	B	Output B

## Output Signal

Grade	Output A	Output B	Pollution Grade
0	0V	0V	Clean
1	0V	+5V	Light pollution
2	+5V	0V	Moderate pollution
3	+5V	+5V	Severe pollution

## Cautions

- Please do not put the module in organic solvent (include silica gel and other cementing compound), painting, medicament, oils and fuels, high concentration gas etc.
- Please do not impact or vibrate the module seriously.
- Please warm up for 5 min before first use.
- Please do not use the module related with personal safety.
- Please do not install the module in the severe convection environment.
- Please do not put in the module in high concentration organic gas for long time.

**Note:** To keep continual product development, we reserve the right to change design features without prior notice.